



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

NOTES:

1. MATERIALS AND FINISHES:
BODY, SHELL, RETAINING RING
WASHER & FERRULE - BRASS, NICKEL PLATING
CONTACT - BRASS, GOLD PLATING
INSULATOR - PTFE, NATURAL
RING - DELRIN, NATURAL
GASKET - RUBBER, RED

2. ELECTRICAL:
A. IMPEDANCE: 50 OHM

3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65°C TO +165°C

4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 122108, AND DATE CODE"


5. CABLE ASSEMBLY INSTRUCTIONS:
A. TRIM CABLE AS SHOWN.
B. SLIDE FERRULE ONTO CABLE.
C. CRIMP CONTACT TO CABLE CENTER CONDUCTOR
WITH 0.068" HEX DIE
D. CRIMP FERRULE WITH 0.213" HEX DIE.

6 SHOWS CABLE ENTRY DIMENSIONS.


THIRD ANGLE PROJ.

REVISIONS



REV	DESCRIPTION	DATE	ECO	APPR
A	MODIFY CONTACT PIN LENGTH 12.25 MM	23-Dec-02	--	--
C	Ø 5.60 WAS Ø 5.33, Ø 6.50 WAS Ø 6.48, NOTES & FORMAT UPDATED	09-Nov-16	2383	VK

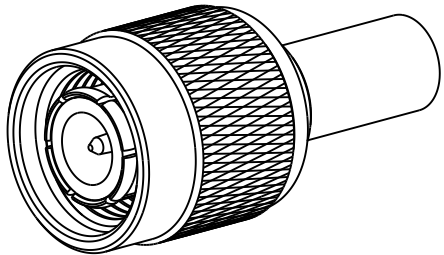

SCALE 2.000

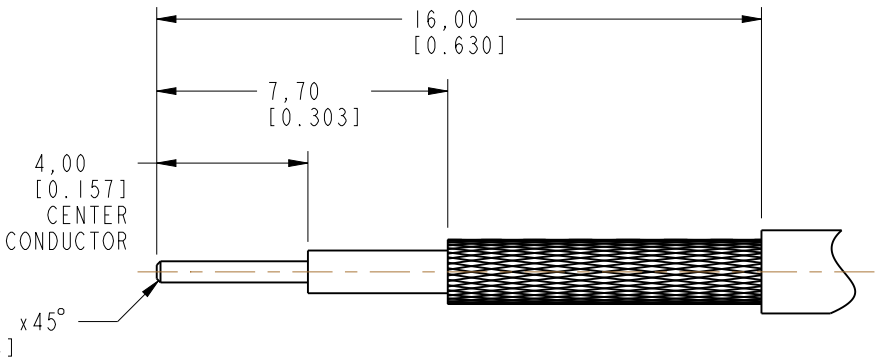

RECOMMENDED CABLE STRIPPING DIMENSIONS

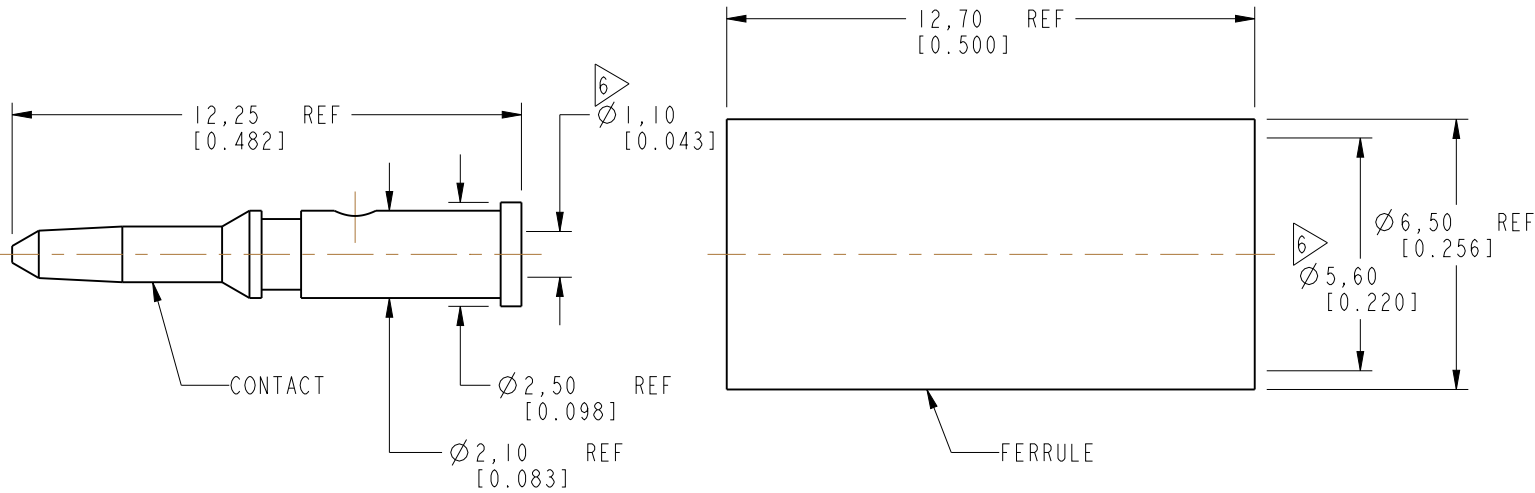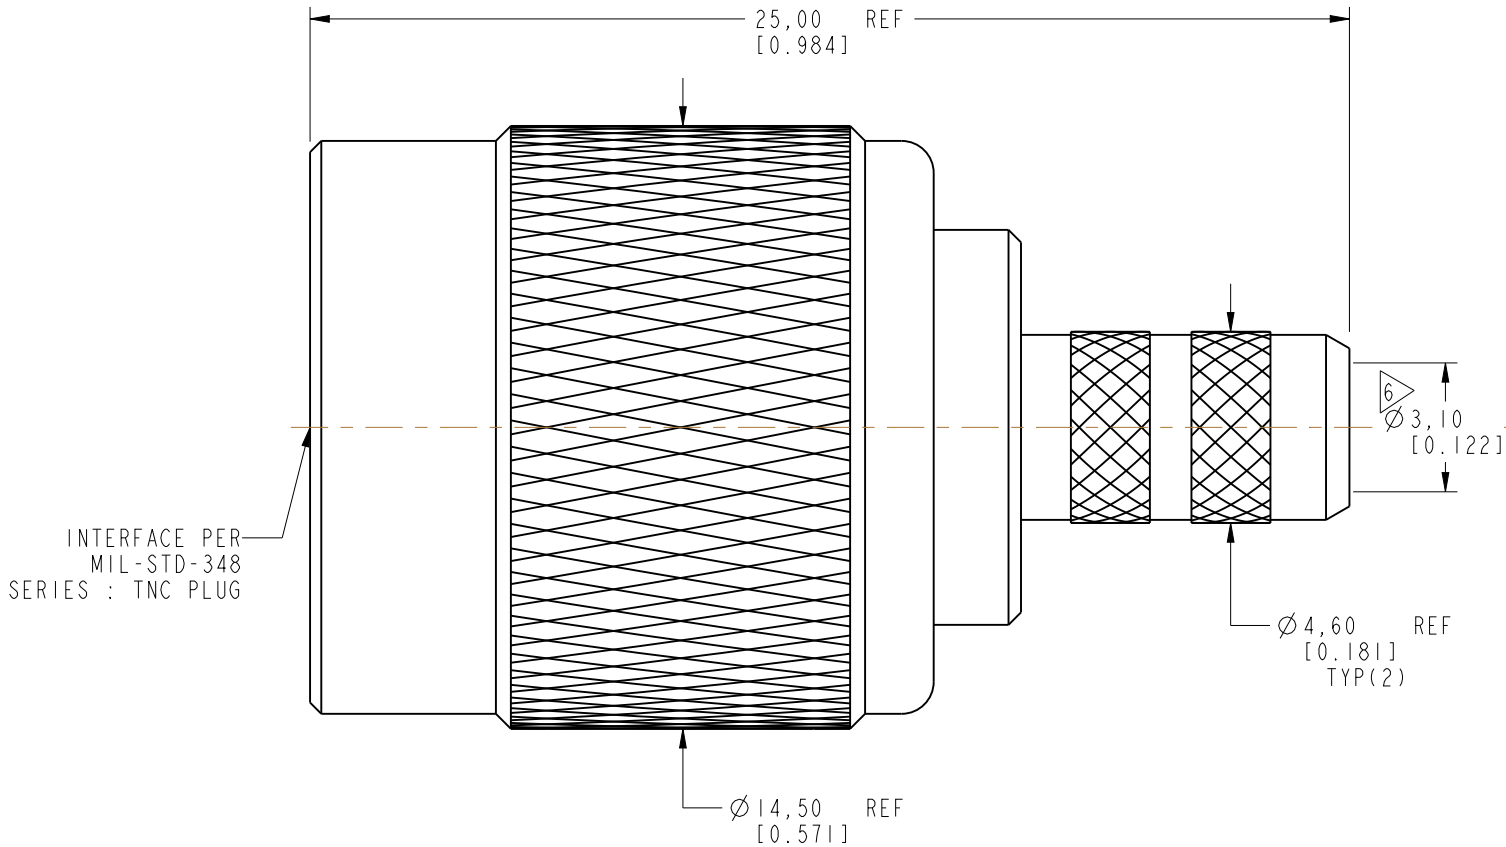

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL SEE NOTES	DRAWN VIJI K	DATE 11-Oct-16	TITLE TNC STR CRIMP PLUG FOR RG 58, 58A, 141 & LMR 195 CABLE	Amphenol RF www.amphenolrf.com	
		ENGINEER VIJI K	DATE 11-Oct-16			
		REFERENCE EAR #	DATE 09-Nov-16		DRAWING NO. 122108	
		CONFIGURATION LEVEL: In Work	CAD FILE		ITEM NO. 122108	
		FINISH			PART NO. 122108	