EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

YB-T1/T3，YBC-T1/T3,SERIES

FEATURES

- General purpose filter with IEC connector providing effective line- to-ground noise up to 15 amp
- Low cost
- Compact design
- Integrated earth line choke (YBC-)
- 250 Faston terminals(YB-T1)
- Solder lug terminals(YB-T3)
- All parts are approved by UL,CSA,VDE,SEMKO,NEMKO,DEMKO,and FIMKO

YB/YBC	01~10	A1/A3/T1/T3	AT/BT	Option	Option	Option	00/01	C
P/N	Current rating	Terminal type	Case type	Inductor	Capacitor X	Capacitor Y	Resistor	Wire
YB:no gnd chock	01/03/06A 08/10/15A	A1:250 faston terminals	AT:screwed with small fixed plate	1A:6.5mH Max.	0.0047~ 0.22uF	0~3300pF	00-without "R"	Lead wire
		A3:solder lug terminals		3A:2.5mH Max.				
YBC:with gnd chock		T1:250 faston terminals	BT:screwed with Biggerf fixed plate	6A:0.8mH Max.			01-with "R"	
		T3:solder lug terminals		10A:0.55mH Max.				

SPECIFICATIONS

ITEM/MODEL		YB01T1/T3 YBC01T1/T3	YB03T1/T3 YBC03T1/T3	YB06T1/T3 YBC06T1/T3	YB08T1/T3 YBC08T1/T3	YB10T1/T3 YBC10T1/T3	YB15T1/T3 YBC15T1/T3
RATED CURRENT		1A	3A	6A	8A	10A	15A
RATED VOLTAGE		125/250 VAC					
POWER LINE FREQUENCY		50/60Hz					
HIPOT RATING (ON MIN)	LINE TO LINE	1450VDC					
	LINE TO GROUND	2250VDC					
LEAKAGE CURRENT		0.8mA MAX.					
INSULATION RESISTANCE		100MΩ MIN 250V DC					
TEMPERATURE RISE		30℃ MAX.					
OPERATING TEMPERATURE		-25~+85℃					

Application

- U P S
- Power Supply
- Audio Amplifier
- LCD、TV/PDP

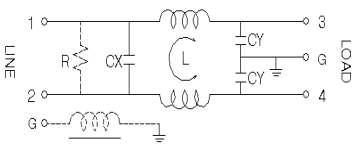







YB01T1



YB03T1



YB06T1



YB10T1