EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 25/06/05		

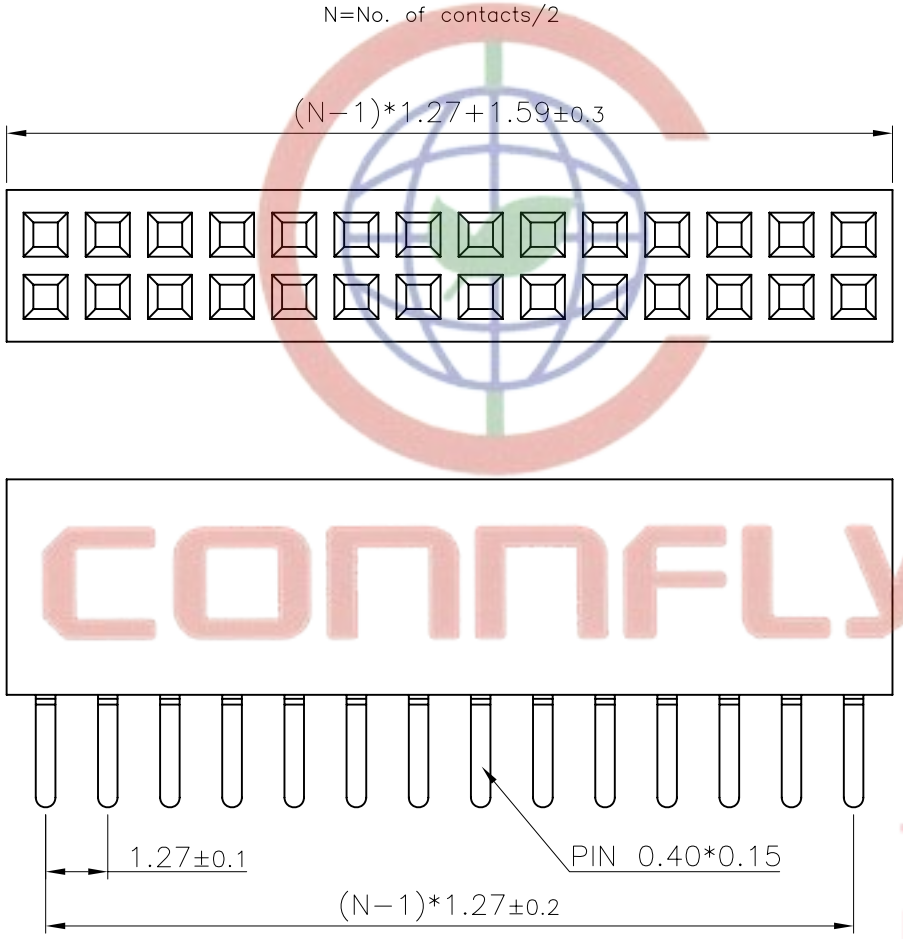

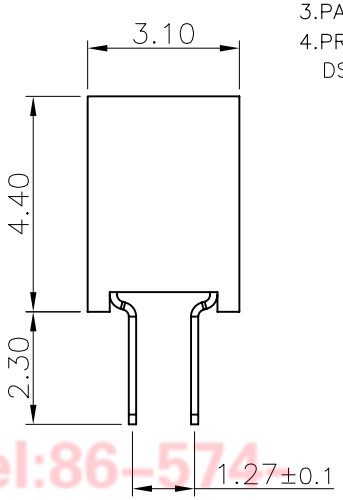

NOTES:

1. SPECIFICATIONS
   - . Current Rating: 1A
   - . Insulation Resistance: 500MΩ Min
   - . Dielectric Withstanding: 300V AC
   - . Contact Resistance: 30mΩ Max
   - . Operating Temperature: −40°C to+105°C
2. MATERIALS
   - . Contact Material: Copper alloy
   - . Insulator: Thermoplastic(UL94 V−0)
3. PART NUMBER: DS1065−03
4. PRODUCT NUMBER CODE:

DS1065−03 − X X X X X

- MOUNTING TYPE
  V:V/T TYPE
- HOUSING COLOR
  B:BLACK
- CONTACT PLATING
  8: FULL GOLD FLASH
- CONNECTOR TYPE
  S:SOCKET
- No.OF CONTACTS
  2*1−2*40

CONNFLY
Tel:86−574
Fax:86−574
E−mail:sale
Http://wwv
AddEast
Town
P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C−DS1065−03−XXXXX		

PROJECTION		TITLE	FEMALE HEADER PITCH 1.27mm TYPE WITHOUT POLARIZATION V/T TYPE
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1065−03

晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD