



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

圖號 DRAWING No. :

品名 NAME: Ring

ITEM No. :

校訂版次 REVISIONS

版次	記述 DESCRIPTION	DATE	核可


MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16
MAX AMP	9	12	17	18

NOTE:

1. MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS
2. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²
INSULATED COLOR: RED
3. MATERIAL THICKNESS: t
TOLERANCE: ±0.05

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	d2 ±0.20	B ±0.20	F ±0.30	L ±1.00	E ±0.60	D ±0.30	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²		2.2	6.6	6.3	19.6	10.0	4.1	1.7	0.75
		3.2	5.5	4.0	16.7				
		3.7	5.5	4.0	16.7				
		3.7	6.6	6.3	19.6				
		3.7	8.0	7.0	21.0				
	ST-081/R	4.3	6.6	6.3	19.6				
		4.3	8.0	7.0	21.0				
		5.3	8.0	7.0	21.0				
		6.5	11.6	11.1	26.8				
		8.4	11.6	11.1	26.8				
		10.5	13.6	13.9	30.7				
		13.0	19.2	16.0	35.6				

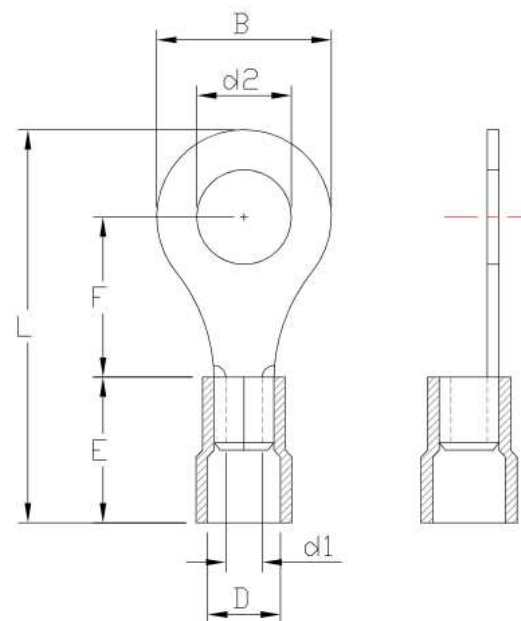


認可 APPROVALS

製圖 DRAFT: TINA

設計 DESIGN: KEN

核可 CHECKED: ANDY

第三視角
THIRD VIEW

MATERIAL

INSULATION: VINYL

MATERIAL: COPPER

TIN PLATING

單位 UNIT

m/m

比例 SCALE

日期 DATE: 2015. 01. 05