



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

RF/RK-320CH/SH

OUTPUT: APPROX 0.05~3.5W Precious metal/Carbon-brush motors


代表的用途: VCD机芯、电动阀门、
手摇充电器、喷香机、

VCD movement Electric valve
Hand charger Aerosol dispenser



MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	TORQUE	CURRENT
			r/min	A	r/min	A	mN.m	W	g.cm	A
RF-320CH-12400	1-4V	3.0V	2900	0.016	2379	0.064	0.49	0.11	25.3	0.259
RF-320CH-14310	1-4V	3.0V	3400	0.021	2759	0.096	0.60	0.18	34	0.438


UNIT: MILLIMETERS

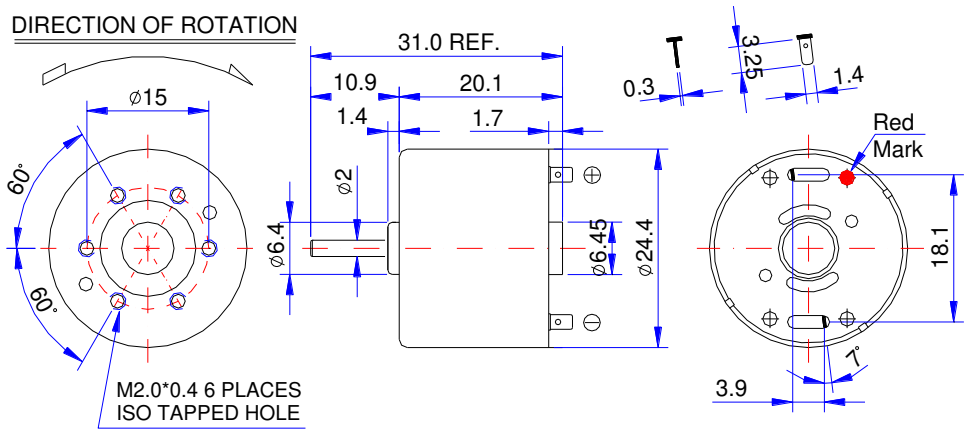

WEIGHT: 25g (APPROX)

RF-320CH-14310

3.0V

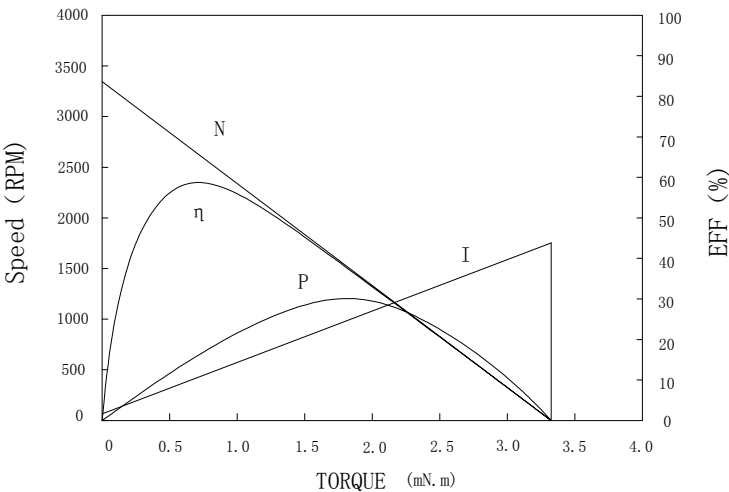

At No Load
Speed: 3363 RPM
Current: 0.021 AMPS

At stall (Extrapolated)
Torque: 3.33 mN.m
Current: 0.438 AMPS

At maximum efficiency
Efficiency: 61.0 %
Torque: 0.599 mN.m
Speed: 2759 RPM
Current: 0.096 AMPS
Output: 0.18 Watts

At maximum Power output
Output: 0.297 Watts
Torque: 1.667 mN.m
Speed: 1851 RPM
Current: 0.21 AMPS

Characteristics
Torque constant K_t : 8.000 mN.m/APM
E. M. F. constant E_c : 8.000 mV/rad/sec
Dynamic resistance: 6.8547 Ohms
Motor regulation M_r : 1008.92 RPM/mN.m