EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

REV.	MATTER	APP.	DATE
A			

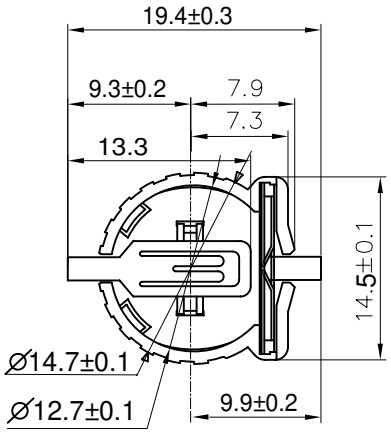



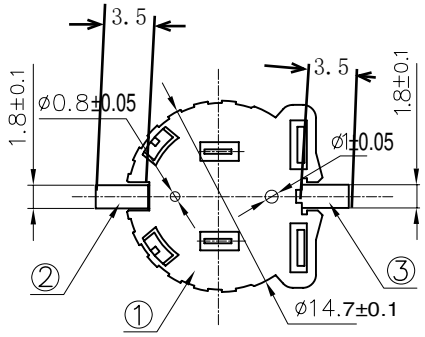

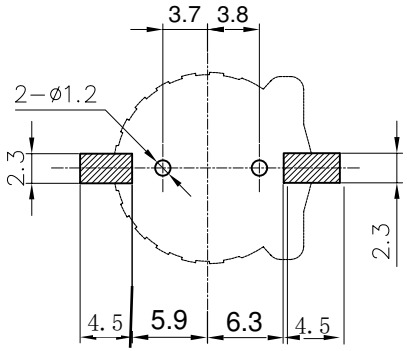

PCB Holes Diagram

xqc; Top View

NOTE:

1.MATERIAL:

a.HOUSING:THERMOPLASTIC GLASS FIBRE UL94V-0

b.CONTACT:PHOSPHOR BRONZE

(SURFACE PLATING:A*u")

SEE ORDERING INFORMATION

2.ELECTRIC:

a.CONTACT RESISTANCE: 30 MILLIOHMS MAX

b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c.DIELECTNIC VOLTAGE: 750V AC ONE SEC LEVEL

d.OPERATING TEMPERATURE: -55°C~ +85°C

ORDERING INFORMATION

XDCR-1220-***

- 电池座系列
- BS-12系列
- SMT 180° TYPE
- HOUSING
  - 006-PPS BLACK BROWN0 (常用)
  - 007-PPS RED BROWN

TOLERANCE	Tolerance: Unless otherwise specified		
LINEAR: x. ±1; .x ±0.38; .xx ±0.25; .xxx ±0.10 — ANGLE: x° ±5°; .x° ±2°; .xx° ±1°			
3	TERMINAL-2	PHOSPHOR BRONZE	Au-Plated
2	TERMINAL-1	PHOSPHOR BRONZE	Au-Plated
1	HOUSING	PPS	BROWN
NO.	PART NAME	MATERIAL	COLOR/FINISHED

深圳市连欣科技有限公司

Shenzhen City Lianxin Technology Co., Ltd

日期DATE	单位UNITS	审核CHECK
2023.12.25	mm	
比例SCALE	制图 DRAW	设计DESIGN
1/1		

PART NO: XDCR-1220-006/007

TITLE: BS-CR1220 贴片镀金2脚电池座子