
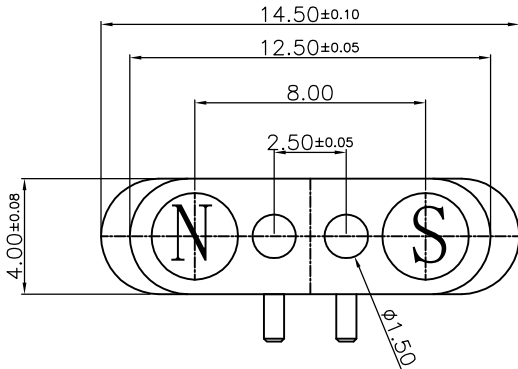
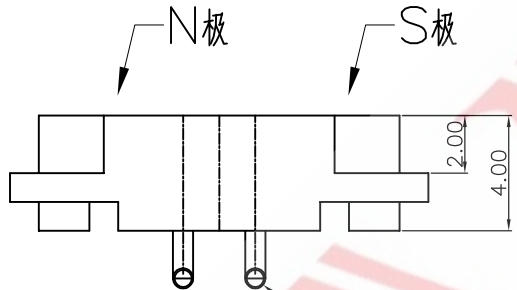






EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

1		2		3		4		5		6		7		8				
POGO PIN		REAC/ROHS								REV	ECN NO	DESRIPTION	DESIGN	APPROVAL	DATE			
										A1	NEW	Replace frame			2018.06.12			
E											otes: Characteristics: A. Material (材料) 1) Housing:High Plastic Black (UL94V-0) 2) Plunger:brass c3604 3) Barrel:brass c3604 4) Spring:Stainless steel wire. B. Plating (电镀) 1) Plunger:Plating Min. 3u' Au over Min. 50u' Ni. 2) Barrel:Plating Min. 0u' Au over Min. 50u' Ni. 3) Spring:Plating Min. 0u' Au C. Electrical (电气性能) 1) Operating voltage: 12V Max. 2) Opetating current: 3A Max. 3) Contact resistance: 30mohm Max. at working height(Quiescence). D. Mechanical (机械性能) 1) Total stroke: 1.10mm. 2) Working height: 1.0mm. 3) Spring Force:45gf±10gf at working height 4) Mechanical life: 10,000 cycle min. 5) Don't exceed the Max. allowed compression E. Environmental (工作环境) 1) Storage and operating temoperature range: -40℃~+85℃ 2) Humidity range: 10% RH to 90% RH 3) Salt spray: 48H F. Others (其它) 1) The dimensions marked * are critical, Should be checked in production 2) RoHS compliant product.							
D																		
C																		
B																		
A											FIRST VIEW				The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM		TITLE:: 2.5PH 90度弯脚 PA4.0	
										GENERAL TOLERANCE						DWG NO: GA02103-P001		
										≥0~2<		±0.15		SCALE 1:1 UNIT mm		PART NO: GA02103230592		
DESIGN WANGGUIFA 2018.06.12										≥2~5<		±0.25		SAMZO COMPONENTS Electronic switch and connector manufacturer		MODEL NO:PR5W4036-2P-C-F		
CHECKED ZHENGUILAN 2018.06.12										≥0~2<		±0.15				NAME:		
APPROVED LILIANJIANG 2018.06.14										≥5		±0.35				POGO PIN		
1		2		3		4		5		6		7		8				