


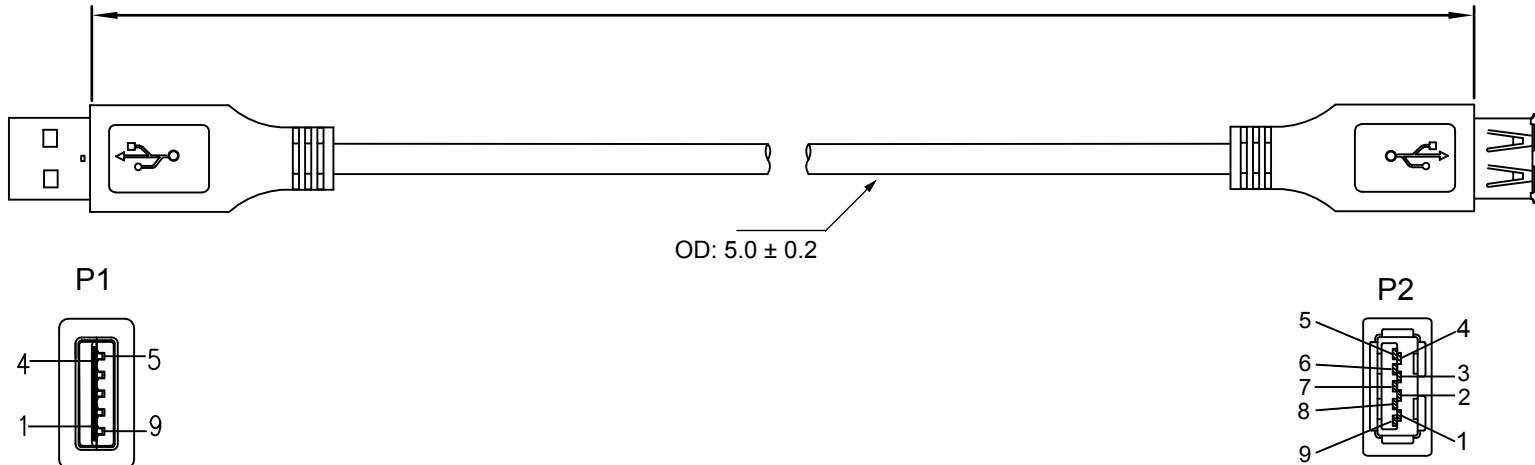

EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

1	2	3	4	5	6	7	8	9	10	11	12	13	14					
A	PIN OUT P1 P2 1 1 2 2 3 3 4 4 5 8 6 9 7 7 8 5 9 6 SHELL (BRAID+DRAIN) SHELL			L  OD: 5.0 ± 0.2										A				
B														B				
C														C				
D														D				
E				Artikel-Nr. / Article No. 93998	Länge / lenght (L) 180 cm	USB 3.0 SuperSpeed Verlängerungskabel - UL-zertifiziert - SuperSpeed Datenübertragungen bis 5 Gbit/s - Anschlüsse: USB-A 3.0-Stecker USB-A 3.0-Buchse - Material Innenleiter: Kupfer - Material: PVC - Kontakte: vernickelt - Schirmung: 3-fach - Farbe: schwarz - Isolationswiderstand: 300 V, 10 MΩ - Spannungsfestigkeit: AC 150 V~ /s, 1 mA - Kontaktwiderstand: 3 Ω - AWG Innenleiter: 28 - Isolation: 88A PVC - Konformität: RoHS						USB 3.0 SuperSpeed extension cable - UL certified - SuperSpeed data transmission up to 5 Gbit/s - Connectors: USB-A 3.0 plug USB-A 3.0 socket - Material inner conductor: copper - Material: PVC - Contacts: nickel plated - Shieldings: 3 times - Colour: black - Insulation resistance: 300 V, 10 MΩ - Dielectric strength: AC 150V~ /s, 1 mA - Contact resistance: 3 Ω - AWG inner conductor: 28 - Insulation: 88A PVC - Conformity: RoHS						E
F				93999 300 cm														F
G				95726 500 cm														G
H																H		
I	Änderungen			Datum	Name		Bezeichnung						Blatt		I			
J	Datum	Name		gez.: 04.11.2020	aw		USB 3.0 Verl AA SCHWARZ						 1/1		J			
				gepr.: 04.11.2020	aw		Zeichnungs-Nr.:						von					
				Norm:			93998, 93999, 95726											
				Änderungen vorbehalten / Subject to change														
	1	2	3	4	5	6	7	8	9	10	11	12	13	14				