EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

ITEM	CONNECTOR PART NO.	DESCRIPTION
1	SSHL-002T-P0.2	GH CONNECTOR CONTACT
2	UL1571, 28 AWG	BLACK

IPI CHECK	EOR CHECK

Applicable Tooling
APPLICATOR

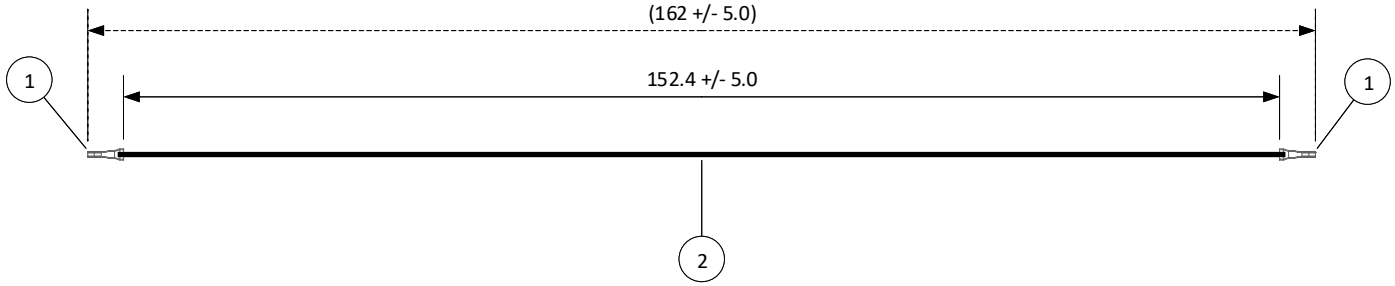

Applicable Housings

NO. OF CIRCUITS	HOUSING PART NO.
2	GHR-02V-S
3	GHR-03V-S
4	GHR-04V-S
5	GHR-05V-S
6	GHR-06V-S
7	GHR-07V-S
8	GHR-08V-S
9	GHR-09V-S
10	GHR-10V-S
11	GHR-11V-S
12	GHR-12V-S
13	GHR-13V-S
14	GHR-14V-S
15	GHR-15V-S

Electrical Specifications
Current: 1.0A AC/DC
Voltage: 50V AC/DC

SCALE	CUSTOMER NAME	CUSTOMER PART NO.
1: 1		

DIMENSIONS	DESCRIPTION
All dimensions are in MM with a tolerance of +/- 3.0 unless otherwise specified.	1.25 mm Pitch GH Series Standard Leads - 6" Inside Length DOUBLE-END LEADS

DRAWN BY	ASSEMBLY PART NO.
STEVEN PILKINGTON	AGHGH28K152

CHECKED BY	DRAWING NO. & REVISION	REVISED
JUSTIN BAKER	GAM-047	3/7/2016

REV.	DESCRIPTION	DATE	BY
1	Add electrical specifications	6/27/2018	SP