




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

USB, für Leiterplattenmontage, A + B Ausführung

USB, for PCB mounting, A + B version

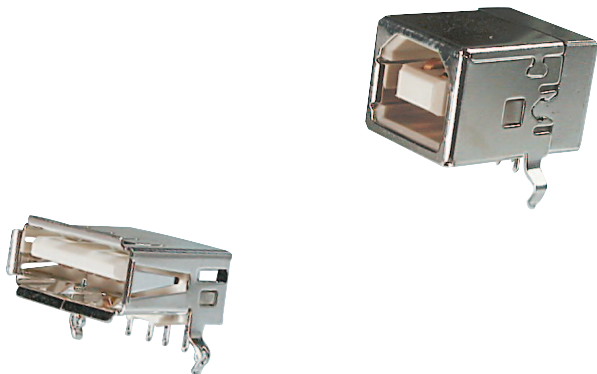

Isolierkörper

PBT, UL94V-0

Kontakte

Kupferlegierung

Strombelastbarkeit

1A

Durchschlagspannung

1000V AC (1min)

Isolationswiderstand

>1000M Ω min.

Kontaktwiderstand

< 15m Ω max

Betriebstemperatur

-55°C bis +105°C

Insulator

PBT, UL94V-0

Contacts

Copper alloy

Current rating

1A

Withstanding voltage

1000V AC (1min)

Insulation resistance

>1000M Ω min.




Contact resistance

< 15m Ω max




Operating temperature

-55°C to +105°C

A-Type



B-Type



Bestellcode :

Ordercode :

A - USBS - x

Bitte „x“ durch die unten geeignete Optionen ersetzen

Please replace „x“ with appropriate options listed below

1.

Ausführung

A - Bauform A

B - Bauform B

Version

A - Type A

B - Type B