



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

USB, Ausführung A, Side-Entry, Ultraflach


USB, version A, Side-Entry, ultra flat





SMT




DIP

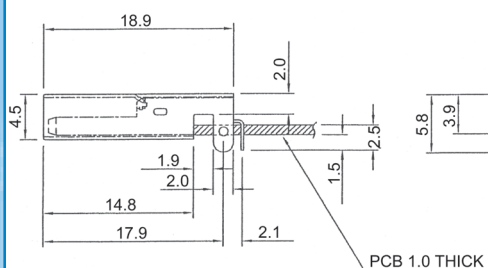

DIP

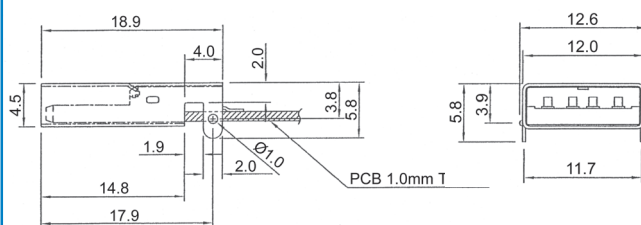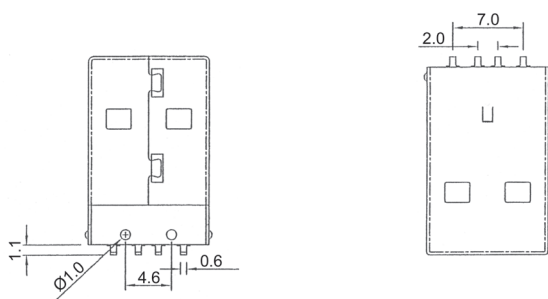

SMT

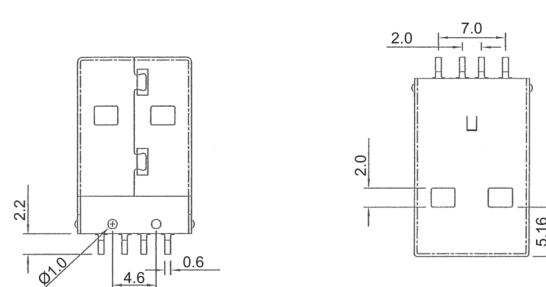

Isolierkörper

Nylon PA9T

Kontakte

Phosphorbronze, t=0.25mm

Gehäuse

Messing t=0.3mm
Oberfläche: Vernickelt

Durchschlagspannung

500V AC (1min)

Isolationswiderstand

1000MΩ min.

Nennspannung und Strom

1.5A bei 250V AC minimum

Insulator

Nylon PA9T

Contacts

Phosphorbronze, t=0.25mm

Shell

Brass t=0.3
Finish: Nickel Plated

Withstanding voltage

500V AC (1min)

Insulation resistance

1000MΩ min.

Rated voltage and current

1.5A at 250V AC minimum

Bestellcode : **A - USB - A - x**
Ordercode :

Bitte „x“ durch die unten geeignete Optionen ersetzen
Please replace „x“ with appropriate options listed below

1.

Ausführung

LP -DIP
LP/SMT -SMT

Version

LP -DIP
LP/SMT -SMT