



**EN:** This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

# IRLZ24N


HEXFET® Power MOSFET

- Logic-Level Gate Drive
- Advanced Process Technology
- Dynamic dv/dt Rating
- 175°C Operating Temperature
- Fast Switching
- Fully Avalanche Rated

## Description

Fifth Generation HEXFETs from International Rectifier utilize advanced processing techniques to achieve the lowest possible on-resistance per silicon area. This benefit, combined with the fast switching speed and ruggedized device design that HEXFET Power MOSFETs are well known for, provides the designer with an extremely efficient device for use in a wide variety of applications.


The TO-220 package is universally preferred for all commercial-industrial applications at power dissipation levels to approximately 50 watts. The low thermal resistance and low package cost of the TO-220 contribute to its wide acceptance throughout the industry.



$$V_{DS} = 55V$$

$$R_{DS(on)} = 0.06\Omega$$

$$I_D = 18A$$



TO-220AB

## Absolute Maximum Ratings

|                             | Parameter                                           | Max.                  | Units |
|-----------------------------|-----------------------------------------------------|-----------------------|-------|
| $I_D$ @ $T_C = 25^\circ C$  | Continuous Drain Current, $V_{GS}$ @ 10V            | 18                    | A     |
| $I_D$ @ $T_C = 100^\circ C$ | Continuous Drain Current, $V_{GS}$ @ 10V            | 13                    |       |
| $I_{DM}$                    | Pulsed Drain Current ①                              | 72                    |       |
| $P_D$ @ $T_C = 25^\circ C$  | Power Dissipation                                   | 45                    | W     |
|                             | Linear Derating Factor                              | 0.30                  | W/°C  |
| $V_{GS}$                    | Gate-to-Source Voltage                              | ±16                   | V     |
| $E_{AS}$                    | Single Pulse Avalanche Energy ②                     | 68                    | mJ    |
| $I_{AR}$                    | Avalanche Current ①                                 | 11                    | A     |
| $E_{AR}$                    | Repetitive Avalanche Energy ①                       | 4.5                   | mJ    |
| dv/dt                       | Peak Diode Recovery dv/dt ③                         | 5.0                   | V/ns  |
| $T_J$<br>$T_{STG}$          | Operating Junction and<br>Storage Temperature Range | -55 to + 175          | °C    |
|                             | Soldering Temperature, for 10 seconds               | 300 (1.6mm from case) |       |
|                             | Mounting torque, 6-32 or M3 screw.                  | 10 lbf•in (1.1N•m)    |       |

## Thermal Resistance


|                 | Parameter                           | Min. | Typ. | Max. | Units |
|-----------------|-------------------------------------|------|------|------|-------|
| $R_{\theta JC}$ | Junction-to-Case                    | —    | —    | 3.3  | °C/W  |
| $R_{\theta CS}$ | Case-to-Sink, Flat, Greased Surface | —    | 0.50 | —    |       |
| $R_{\theta JA}$ | Junction-to-Ambient                 | —    | —    | 62   |       |

# IRLZ24N

International  
**IR** Rectifier

## Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

|                                 | Parameter                            | Min. | Typ.  | Max.  | Units               | Conditions                                           |
|---------------------------------|--------------------------------------|------|-------|-------|---------------------|------------------------------------------------------|
| $V_{(BR)DSS}$                   | Drain-to-Source Breakdown Voltage    | 55   | —     | —     | V                   | $V_{GS} = 0V, I_D = 250\mu A$                        |
| $\Delta V_{(BR)DSS}/\Delta T_J$ | Breakdown Voltage Temp. Coefficient  | —    | 0.061 | —     | V/ $^\circ\text{C}$ | Reference to $25^\circ\text{C}$ , $I_D = 1mA$        |
| $R_{DS(on)}$                    | Static Drain-to-Source On-Resistance | —    | —     | 0.060 | $\Omega$            | $V_{GS} = 10V, I_D = 11A$ ④                          |
|                                 |                                      | —    | —     | 0.075 |                     | $V_{GS} = 5.0V, I_D = 11A$ ④                         |
|                                 |                                      | —    | —     | 0.105 |                     | $V_{GS} = 4.0V, I_D = 9.0A$ ④                        |
| $V_{GS(th)}$                    | Gate Threshold Voltage               | 1.0  | —     | 2.0   | V                   | $V_{DS} = V_{GS}, I_D = 250\mu A$                    |
| $g_{fs}$                        | Forward Transconductance             | 8.3  | —     | —     | S                   | $V_{DS} = 25V, I_D = 11A$                            |
| $I_{DSS}$                       | Drain-to-Source Leakage Current      | —    | —     | 25    | $\mu A$             | $V_{DS} = 55V, V_{GS} = 0V$                          |
|                                 |                                      | —    | —     | 250   |                     | $V_{DS} = 44V, V_{GS} = 0V, T_J = 150^\circ\text{C}$ |
| $I_{GSS}$                       | Gate-to-Source Forward Leakage       | —    | —     | 100   | nA                  | $V_{GS} = 16V$                                       |
|                                 | Gate-to-Source Reverse Leakage       | —    | —     | -100  |                     | $V_{GS} = -16V$                                      |
| $Q_g$                           | Total Gate Charge                    | —    | —     | 15    | nC                  | $I_D = 11A$                                          |
| $Q_{gs}$                        | Gate-to-Source Charge                | —    | —     | 3.7   |                     | $V_{DS} = 44V$                                       |
| $Q_{gd}$                        | Gate-to-Drain ("Miller") Charge      | —    | —     | 8.5   |                     | $V_{GS} = 5.0V$ , See Fig. 6 and 13 ④                |
| $t_{d(on)}$                     | Turn-On Delay Time                   | —    | 7.1   | —     | ns                  | $V_{DD} = 28V$                                       |
| $t_r$                           | Rise Time                            | —    | 74    | —     |                     | $I_D = 11A$                                          |
| $t_{d(off)}$                    | Turn-Off Delay Time                  | —    | 20    | —     |                     | $R_G = 12\Omega, V_{GS} = 5.0V$                      |
| $t_f$                           | Fall Time                            | —    | 29    | —     |                     | $R_D = 2.4\Omega$ , See Fig. 10 ④                    |
| $L_D$                           | Internal Drain Inductance            | —    | 4.5   | —     | nH                  | Between lead,<br>6mm (0.25in.)                       |
| $L_S$                           | Internal Source Inductance           | —    | 7.5   | —     |                     | from package<br>and center of die contact            |
| $C_{iss}$                       | Input Capacitance                    | —    | 480   | —     | pF                  | $V_{GS} = 0V$                                        |
| $C_{oss}$                       | Output Capacitance                   | —    | 130   | —     |                     | $V_{DS} = 25V$                                       |
| $C_{rss}$                       | Reverse Transfer Capacitance         | —    | 61    | —     |                     | $f = 1.0MHz$ , See Fig. 5                            |



## Source-Drain Ratings and Characteristics

|          | Parameter                                 | Min.                                                                        | Typ. | Max. | Units | Conditions                                                              |
|----------|-------------------------------------------|-----------------------------------------------------------------------------|------|------|-------|-------------------------------------------------------------------------|
| $I_S$    | Continuous Source Current<br>(Body Diode) | —                                                                           | —    | 18   | A     | MOSFET symbol<br>showing the<br>integral reverse<br>p-n junction diode. |
| $I_{SM}$ | Pulsed Source Current<br>(Body Diode) ①   | —                                                                           | —    | 72   |       |                                                                         |
| $V_{SD}$ | Diode Forward Voltage                     | —                                                                           | —    | 1.3  | V     | $T_J = 25^\circ\text{C}, I_S = 11A, V_{GS} = 0V$ ④                      |
| $t_{rr}$ | Reverse Recovery Time                     | —                                                                           | 60   | 90   | ns    | $T_J = 25^\circ\text{C}, I_F = 11A$                                     |
| $Q_{rr}$ | Reverse Recovery Charge                   | —                                                                           | 130  | 200  | nC    | $di/dt = 100A/\mu s$ ④                                                  |
| $t_{on}$ | Forward Turn-On Time                      | Intrinsic turn-on time is negligible (turn-on is dominated by $L_S + L_D$ ) |      |      |       |                                                                         |

### Notes:

- ① Repetitive rating; pulse width limited by max. junction temperature. ( See fig. 11 )  
 ②  $V_{DD} = 25V$ , starting  $T_J = 25^\circ\text{C}$ ,  $L = 790\mu H$   
 $R_G = 25\Omega$ ,  $I_{AS} = 11A$ . (See Figure 12)

- ③  $I_{SD} \leq 11A$ ,  $di/dt \leq 290A/\mu s$ ,  $V_{DD} \leq V_{(BR)DSS}$ ,  
 $T_J \leq 175^\circ\text{C}$   
 ④ Pulse width  $\leq 300\mu s$ ; duty cycle  $\leq 2\%$ .

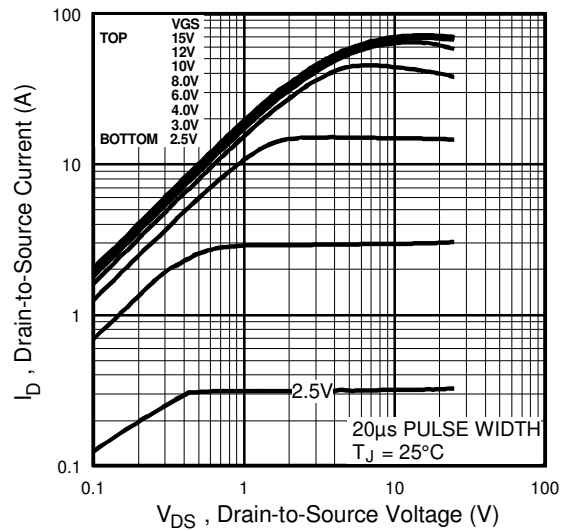


Fig 1. Typical Output Characteristics

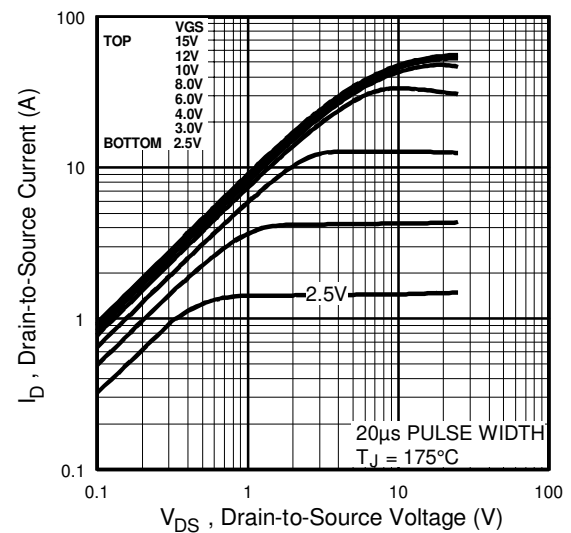


Fig 2. Typical Output Characteristics

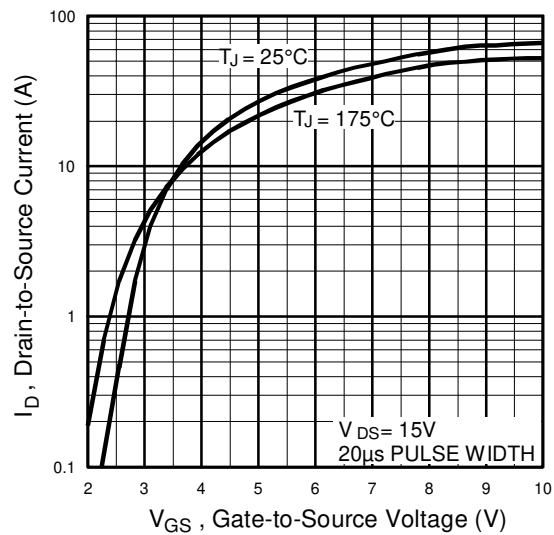


Fig 3. Typical Transfer Characteristics


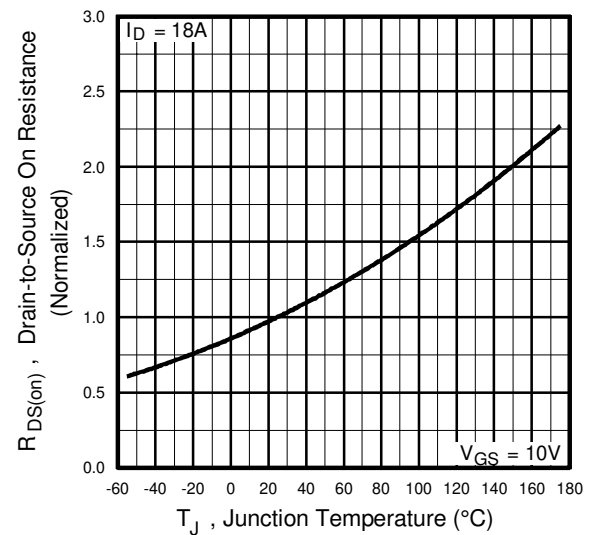



Fig 4. Normalized On-Resistance Vs. Temperature

# IRLZ24N


International  
**IR** Rectifier

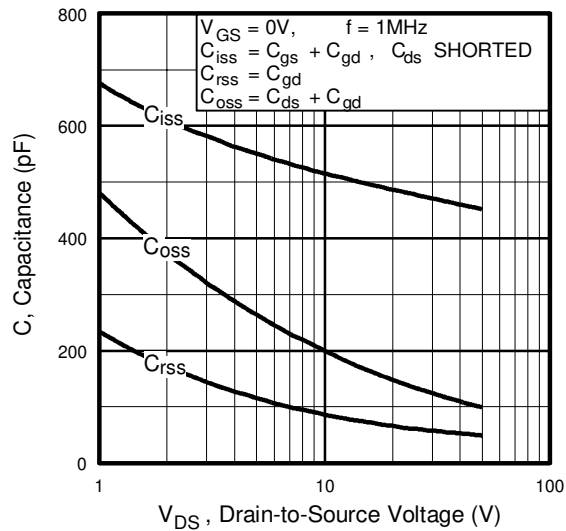


**Fig 5.** Typical Capacitance Vs. Drain-to-Source Voltage

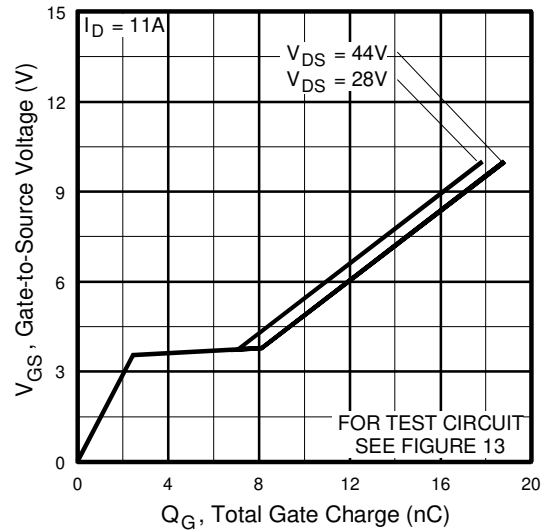


**Fig 6.** Typical Gate Charge Vs. Gate-to-Source Voltage

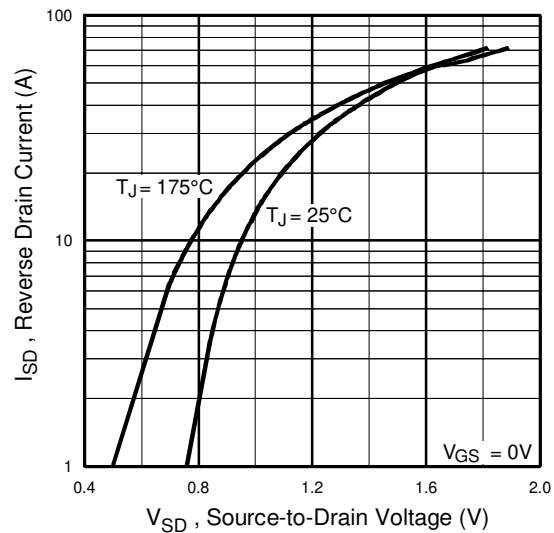


**Fig 7.** Typical Source-Drain Diode Forward Voltage

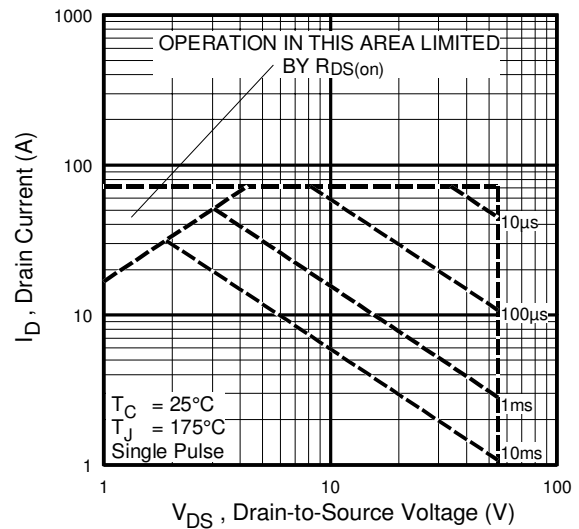


**Fig 8.** Maximum Safe Operating Area

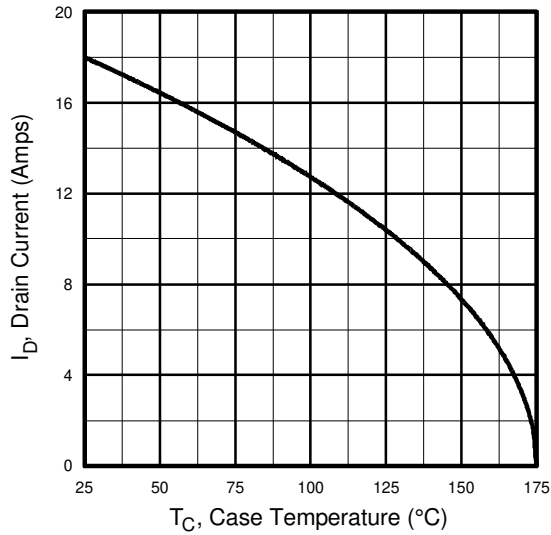


**Fig 9.** Maximum Drain Current Vs. Case Temperature

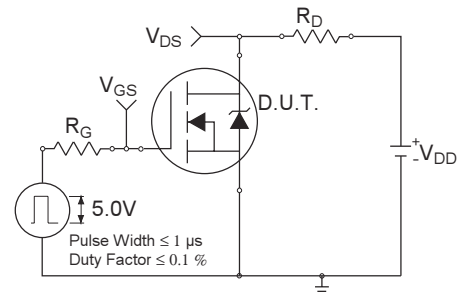

**Fig 10a.** Switching Time Test Circuit

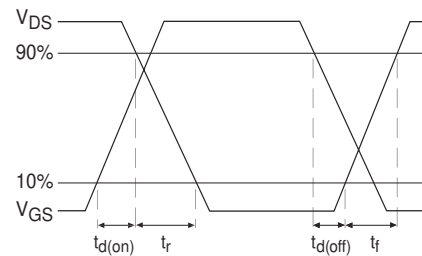


**Fig 10b.** Switching Time Waveforms

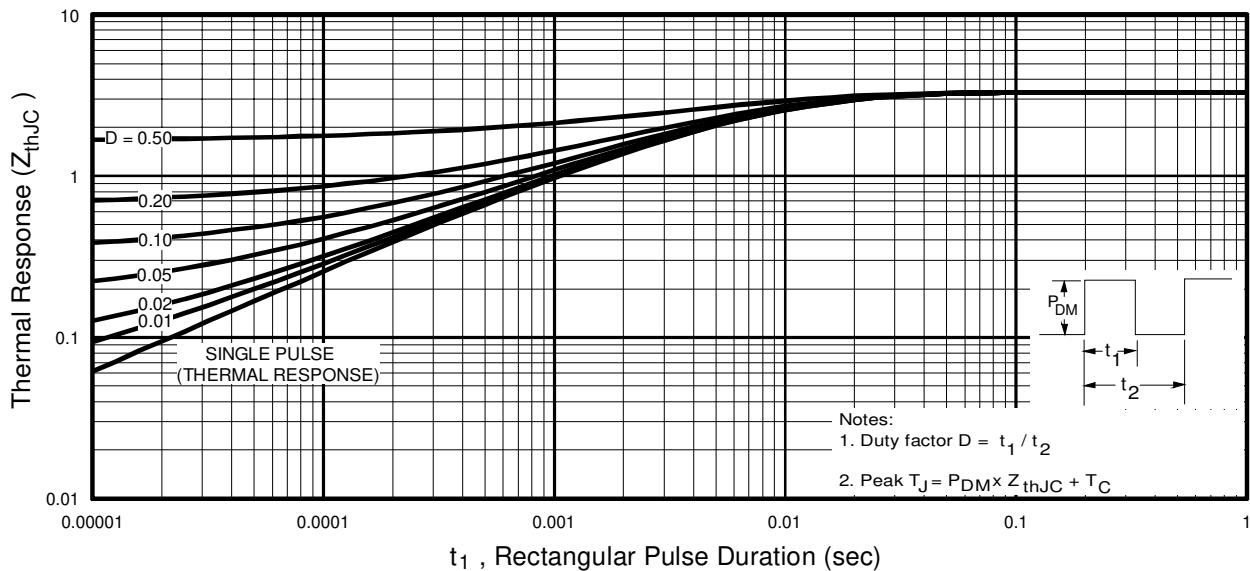


**Fig 11.** Maximum Effective Transient Thermal Impedance, Junction-to-Case

# IRLZ24N


International  
**IOR** Rectifier

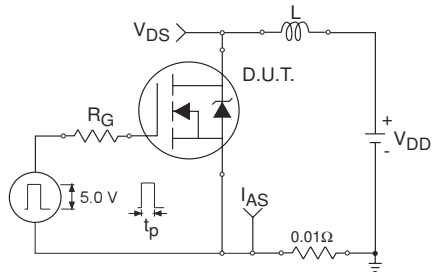


**Fig 12a.** Unclamped Inductive Test Circuit

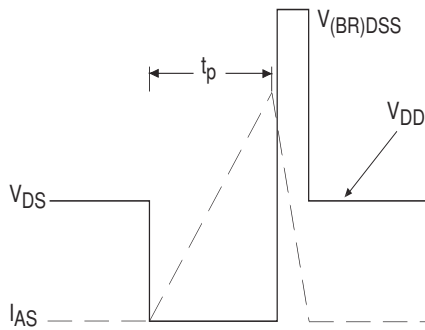


**Fig 12b.** Unclamped Inductive Waveforms

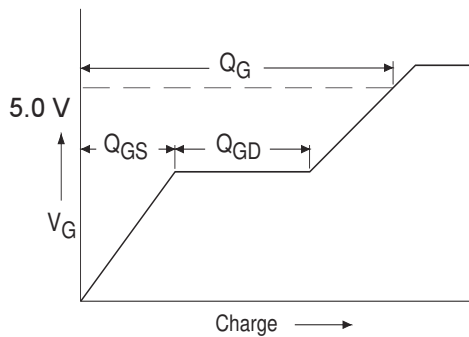

**Fig 13a.** Basic Gate Charge Waveform


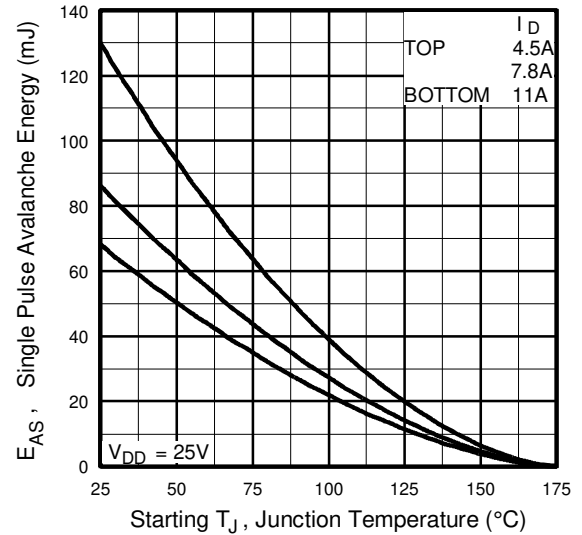


**Fig 12c.** Maximum Avalanche Energy Vs. Drain Current

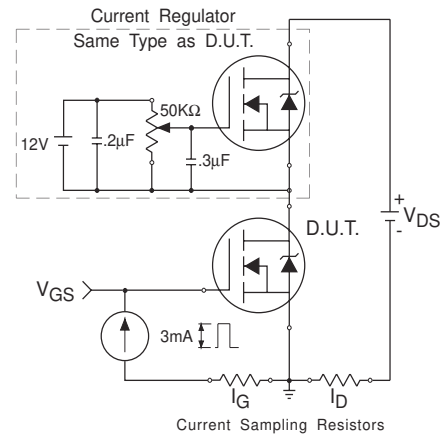

**Fig 13b.** Gate Charge Test Circuit

### Peak Diode Recovery dv/dt Test Circuit

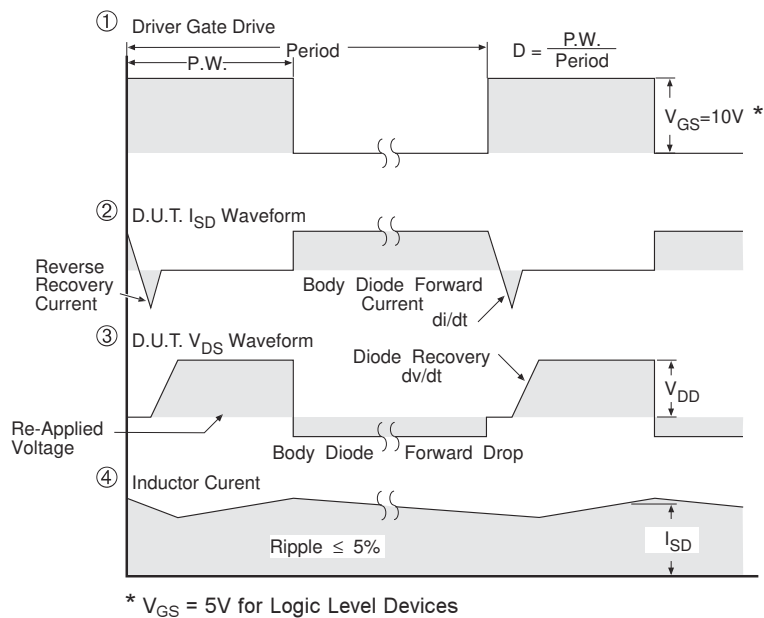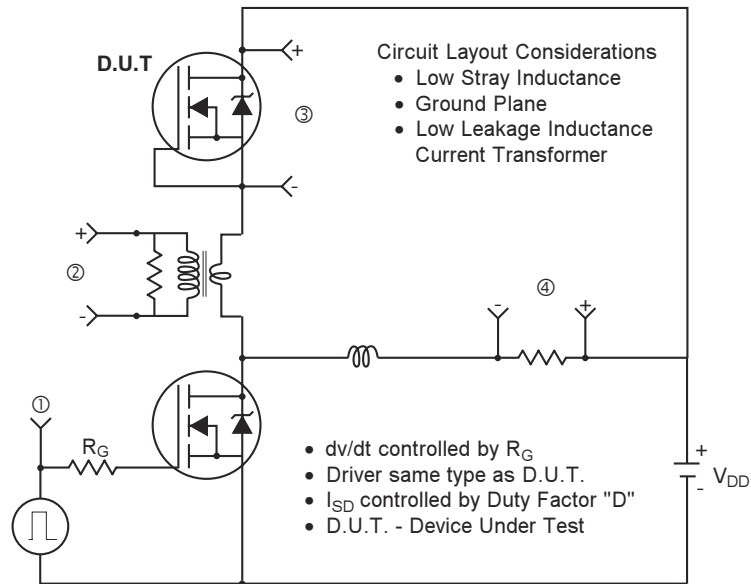

**Fig 14. For N-Channel HEXFETS**




# IRLZ24N

International  
**IR** Rectifier

## Package Outline

### TO-220AB Outline


Dimensions are shown in millimeters (inches)

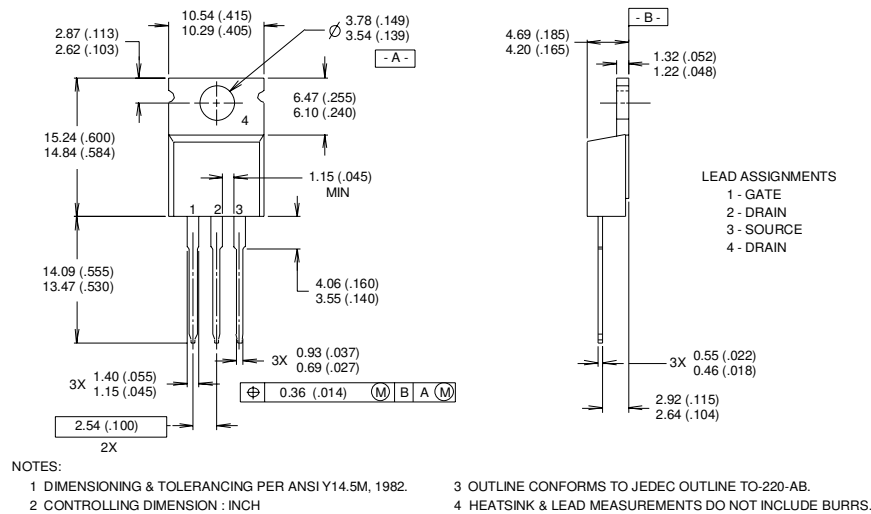

## Part Marking Information

### TO-220AB

EXAMPLE : THIS IS AN IRF1010  
WITH ASSEMBLY  
LOT CODE 9B1M

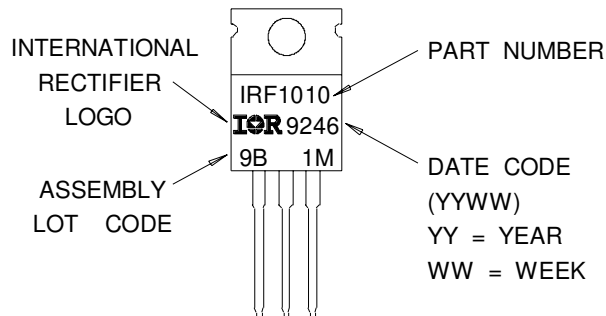

Data and specifications subject to change without notice.

International  
**IR** Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105

TAC Fax: (310) 252-7903

Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 07/02

Note: For the most current drawings please refer to the IR website at:  
<http://www.irf.com/package/>