



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.


AWP-10P SERIES SHROUDED HEADER PITCH 2.54 MM



Specification:

- 1) Operating Temperature: 0°C ~ 85°C
- 2) Contact Resistance: 20 mΩ max. (initial)
- 3) Insulation Resistance: 1000 MΩ min
- 4) Dielectric Withstanding Voltage: 1000 VAC per minute

AWP-10PSG

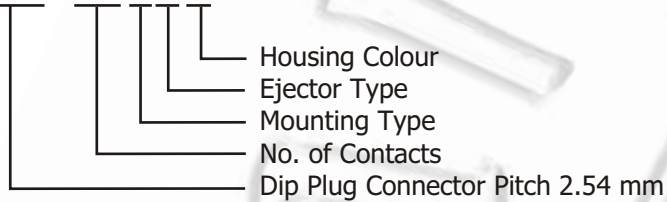

NO. OF CONTACTS

10, 14, 16, 20, 26, 30, 34, 40, 50, 60, 64

HOUSING COLOUR


G gray
omitted when standard colour (black)

EJECTOR TYPE

S short
W without
omitted when standard ejector (long)

MOUNTING TYPE

P straight
K right angle

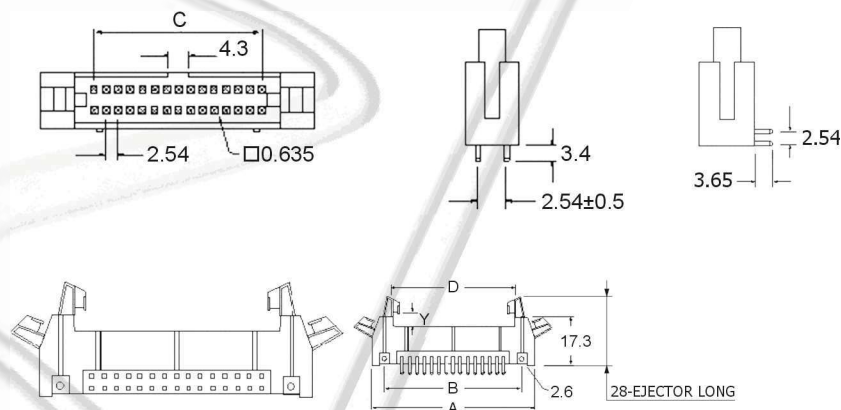

No. of Contacts	10	14	16	20	26	30	34	40	50	60	64
A	32.0	37.08	39.62	44.70	52.32	57.40	62.48	70.10	82.80	95.50	100.58
B	21.84	26.92	29.46	34.54	42.16	47.24	52.32	59.94	72.64	85.34	90.42
C	10.16	15.24	17.78	22.86	30.48	35.56	40.64	48.26	60.96	73.66	78.74
D	17.96	23.04	25.58	30.66	38.28	43.36	48.44	56.06	68.76	81.46	86.54