EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

嘉尼企業股份有限公司 CANAL ELECTRONIC CO.,LTD.

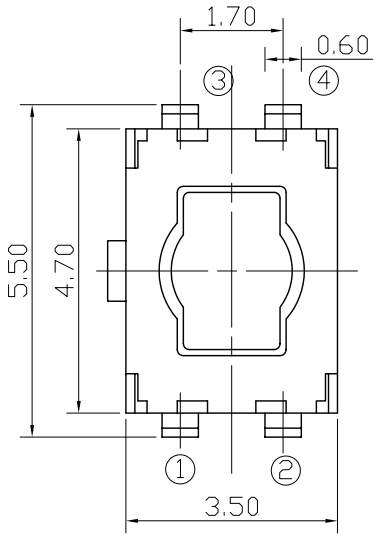

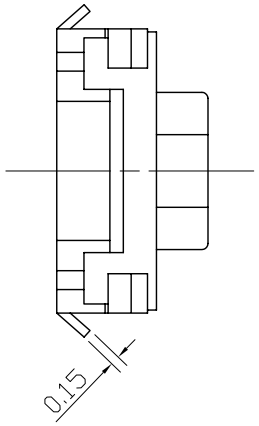

嘉尼企業股份有限公司
研發部
2004.03.22
發圖章

P.C.B LAYOUT

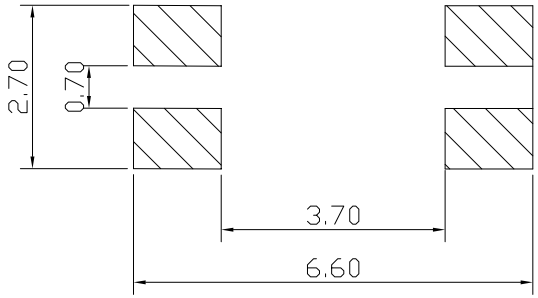

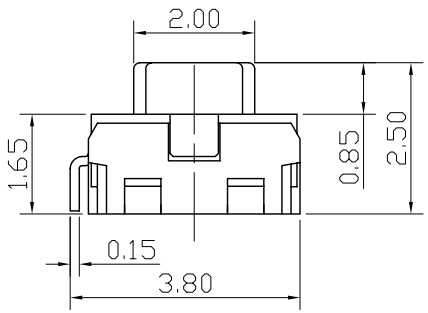

CIRCUIT



Rating	DC12V 50mA
Contact Resistance	500mΩMax.
Insulation Resistance	>100MΩDC100V
Withstand Voltage	AC250V 1min.
Soldering Temper.	230℃ Max.
Electrical Life	100,000 cycles
Ambient Temper. Used	-20℃ to 70℃
Ambient Humidity Used	<85% RH
Operating Force	160^{+70}_{-40}gf
Travel	$0.3^{+0.1}_{-0.2}$mm

REVISION	DESCRIPION	REVISED BY	TOLEANCES .X±0.3			ANGLE ½°		UNIT	mm	PART NAME	TS47 SPEC DRAWING	DWG NO
4			DRAWN BY	吳美玉	DESIGNED BY	ERIC	SCALE	8:1				S0216A
3												
2			CHECKED BY	?	APPROVED BY	?	DATE	2004/03/22		PART NO	TS47-25MV160	
1												