



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

UM66T-L Series

UM66T Simple Melody Generator

Features

- 64-note ROM memory
- 1.3V to 3.3V operating voltage and low power consumption
- Packaged in inexpensive TO-92 package
- Built-in RC oscillator
- Level-hold mode to play repeatedly
- Dynamic speaker can be driven with external NPN transistor.

General Description

The UM66T series is a CMOS LSI designed melody generator IC for use in telephones and toys application. It has an on-chip ROM programmed for musical performance. Produced by CMOS technology, the device results in very low power consumption. And with built-in RC oscillator, a compact melody module can be constructed with only a few additional components.

Absolute Maximum Ratings

DC Supply Voltage	-0.3V	to +5.0V
Operating Ambient Temperature	-10°C	to 60°C
Storage Temperature	-55°C	to 125°C

Electrical Characteristics


(V_{ss}=0V, V_{dd}=1.5V, T_a=25°C, unless otherwise specified.)

Parameter	Symbol	Min.	Typ.	Max.	Conditions
Operating voltage	V _{dd}	1.3V	1.5V	3.3V	
Current Consumption	I _{dd}	-	16μA	50μA	Playing with no load
Output Current	I _{o/p}	2mA	-	-	
Osc. frequency	F _{osc}	63kHz	90kHz	117kHz	

Song Series List

Part number	Song name
UM66T-01L	Jingle Bells + Santa Claus Is Coming To Town + We Wish You A Merry Christmas
UM66T-05L	Home Sweet Home
UM66T-09L	Wedding March (Mendelssohn)
UM66T-19L	For Alice
UM66T-32L	Coo Coo Waltz
UM66T-68L	It Is A Small World


Pin Configuration (Front View)

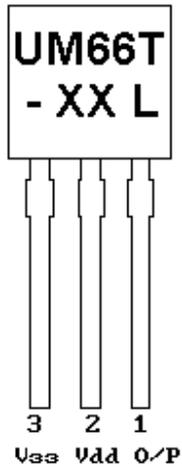


Pin no.	Symbol	Description
1	O/P	Melody Output
2	Vdd	Positive Power Supply
3	Vss	Negative Power Supply

Typical Application Circuits

LEVEL HOLD MODE FOR SPEAKER

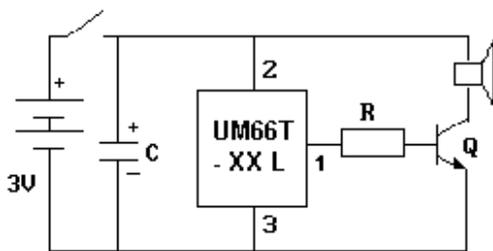

LEVEL HOLD MODE FOR PIEZO BUZZER

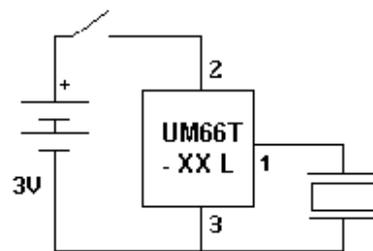

Recommended values : C = 1 μ F , R = 4.7K Ω , Q = 2SC9013

REV.11-98 (2 pages)