



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.




reference


2J510F - flexible

mounting position
 nominal impedance
 frequency
 polarization
 gain
 vswr
 power handling
 cable
 connector
 housing size
 working temperature

ON GLASS
50 Ohms
AMPS 824-894MHz / GSM 900, 1800 MHz
PCN 1,9GHz / UMTS 2,1GHz/ Bluetooth 2,4GHz
VERTICAL
2.15 dBi
<1,5/2
25W
2.5m RG174
FME Female
11- 15mm x 123 mm
-40°C to +85°C

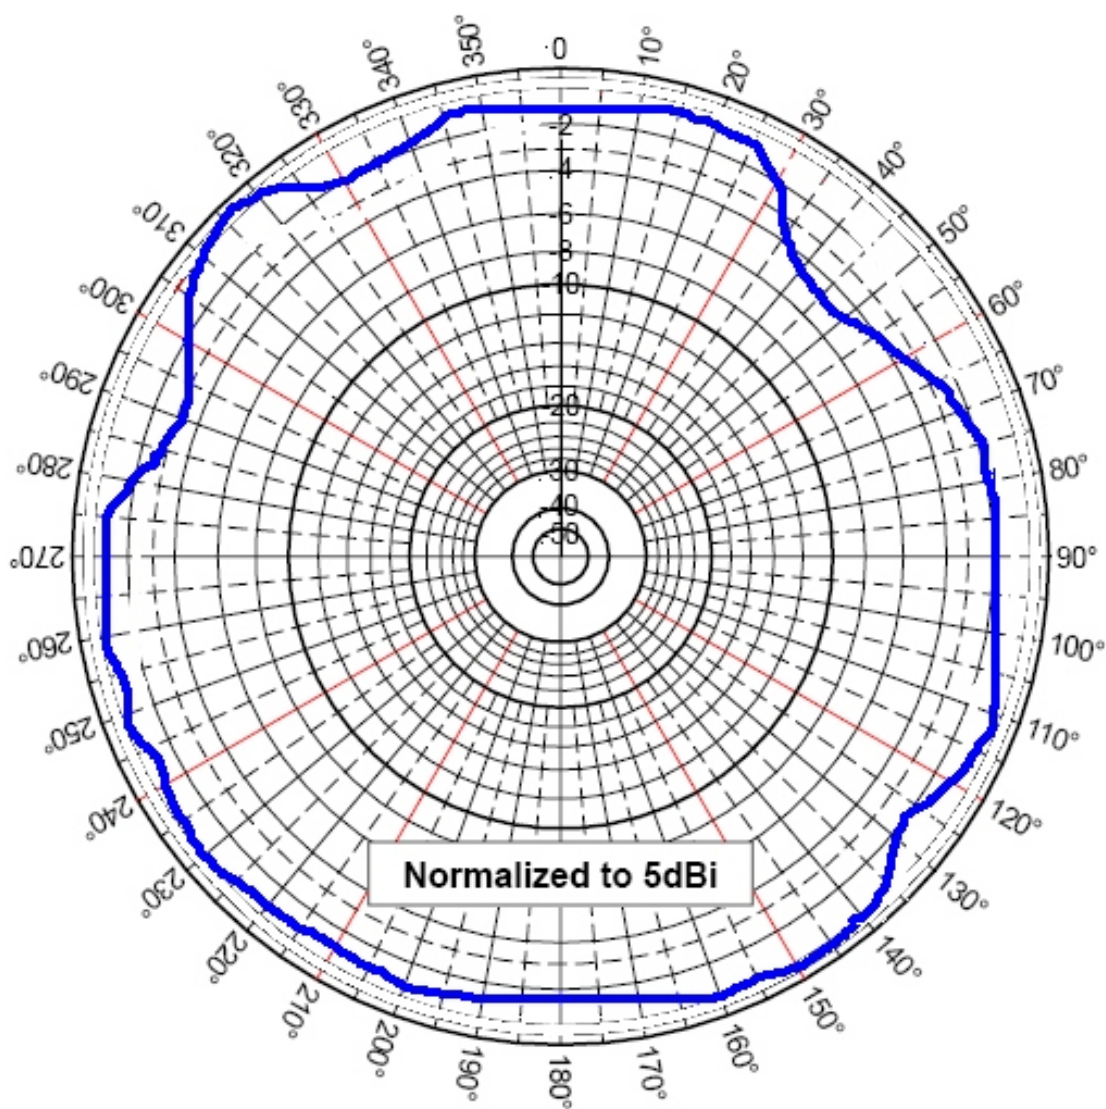

Azimuthal Pattern (X, Y or E-Plane)

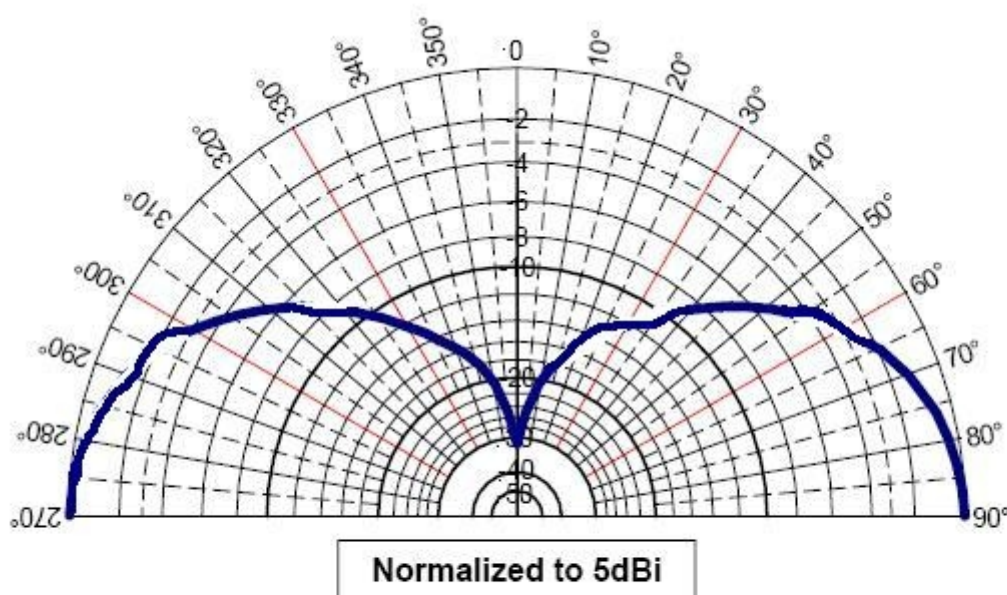

Elevation Pattern (Z, Y or H-Plane)

