

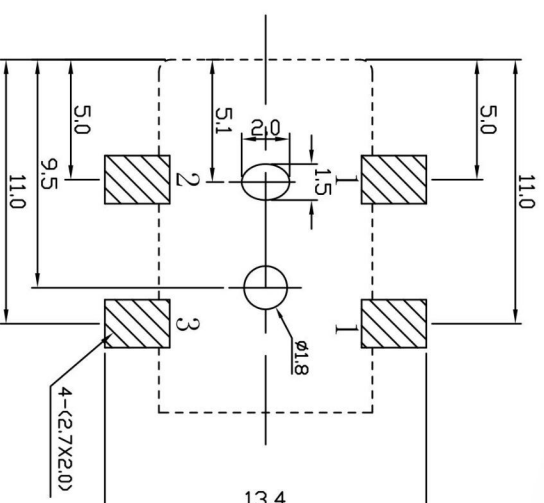
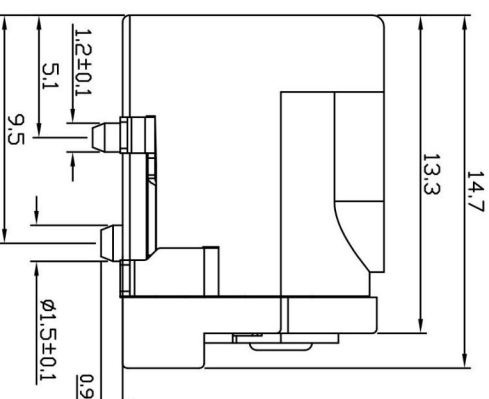
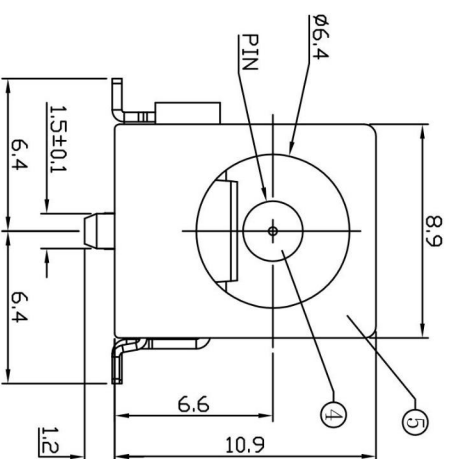


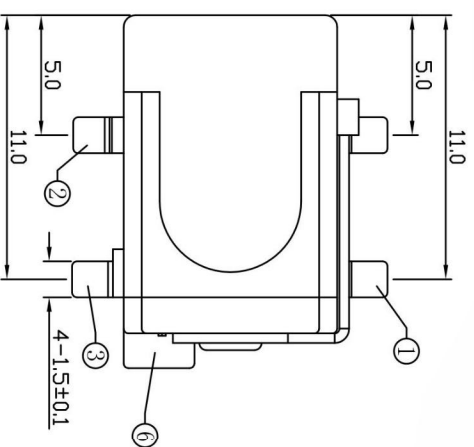

EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

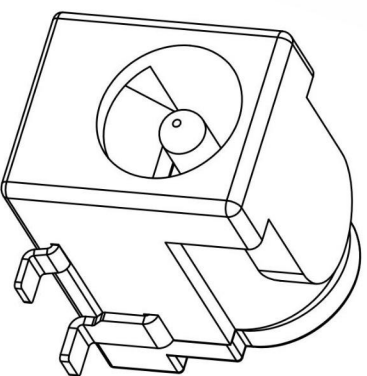

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.1 (Printed-top view)

6	COVER	1	PA9T	UL-94V0(BLACK)	
5	HOUSING	1	PA9T	UL-94V0(BLACK)	
4	PN	1	H59(COPPER ALLOY)	MB:Cu	Cn/Sn PLATED
3	CURVE PIECE	1	C2680	t=0.40	MB:Cu Sn PLATED
2	SPRING	1	C5191	t=0.30	MB:Cu Sn PLATED
1	CURVE PIECE	1	C2680	t=0.40	MB:Cu Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK	

SCHEMATIC	
C8118-CTB0000R	
C8118-DCTB0000R	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.2

ROHS Compliant		玄茂科技股份有限公司	
APPRO. 核准	BETTY		TOLERANCE 容許公差 0.00 ± ANG. ±
DWG. 製圖	BETTY		
DATE 制表日	2010/01/07	UNIT 單位	SIZE 紙張尺寸
PAGE 張數	1 OF 1	REV. 版本	B
PART NAME 品名		DC POWER JACK SMT TYPE Φ2.0mm or Φ2.5mm NORMAL CLOSE TIN PLATING BLACK INSULATOR REEL PACKING ROHS	
PART NO.		料號	