



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

PIEZO BUZZER

Customer	
Customer P/O	
Bestar Model Name	BPT-380X-SA230
Product No.	041012
Issue No.	BS/TEP01.198A
Issue Date	03/06/20

Approval:

- 1.Characteristic
- 2.Drawing
- 3.Reliability Test
- 4.Packing



BESTAR ELECTRONICS INDUSTRY CO.,LTD
TianAn Industry Park4/F,Site B ChangZhou New District
Tel:86-519-5103228
Fax:86-519-5131010
E-Mail:wu@be-star.com
Http:www.be-star.com

BPT-380X-SA230


1. Characteristic

Electrical and Mechanical Characteristics



No.	Item	Specifications
1.	a)Rated Voltage	230V
2.	Operating Voltage	130-240V
3.	Operating Current (max)	25 mA
4.	a)Sound Output at 30cm	90dB
5.	a)Resonant Frequency	2900± 500 Hz
6.	Tone	Continuous+Fast Pulse
7.	Operating Temperature	-20...+60° C
8.	Storage Temperature	-30...+70° C
a)Value applying at rated voltage		

2. Drawing

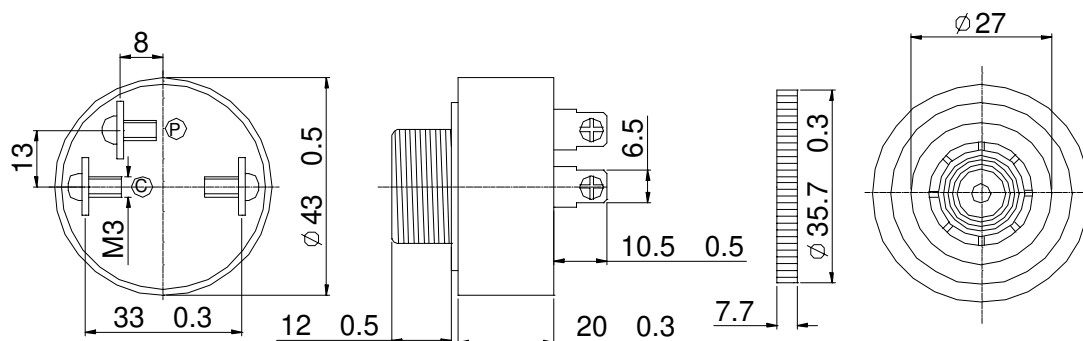

DIS.		DATE		Page:1 of 2	BPT-380X-SA230
CHEC.		DATE		3rd angle projection	Piezo Buzzer
APPR.		DATE			DRG NO BS/TEP01.198A
 BESTAR ELECTRONICS INDUSTRY CO.,LTD TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					

BPT-380X-SA230

3. Reliability test

3.1 High temperature test


Temperature +70
Duration 96hrs

3.2 Low temperature test

Temperature -30
Duration 96hrs


3.3 Temperature cycle test

Cycles 5



3.4 Humidity cycle test

Cycles 5



all these tests above should be measured after leaving normal temperature for 2hrs.

3.5 Drop test

Height 70cm
(to 10mm thickness woodenboard)
Direction 3

Notice: All specification must be satisfied in this condition.

4.Packing

4.1 Packing Quantity :1pcs per small box
250pcs per carton
carton size 49x25x30cm,

DIS.

DATE

Page:2 of 2

BPT-380X-SA230

CHEC.

DATE

3rd angle
projection

APPR.

DATE

Piezo Buzzer



BESTAR ELECTRONICSINDUSTRY CO.,LTD

TianAn Industry Park 4/F,Site B ChangZhou New District

E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com

DRG NO

BS/TEP01.198A