





EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

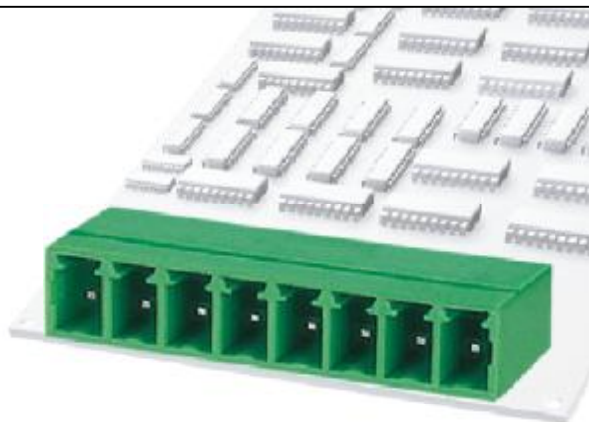



15EDGRC-3.5
15EDGRC-3.81

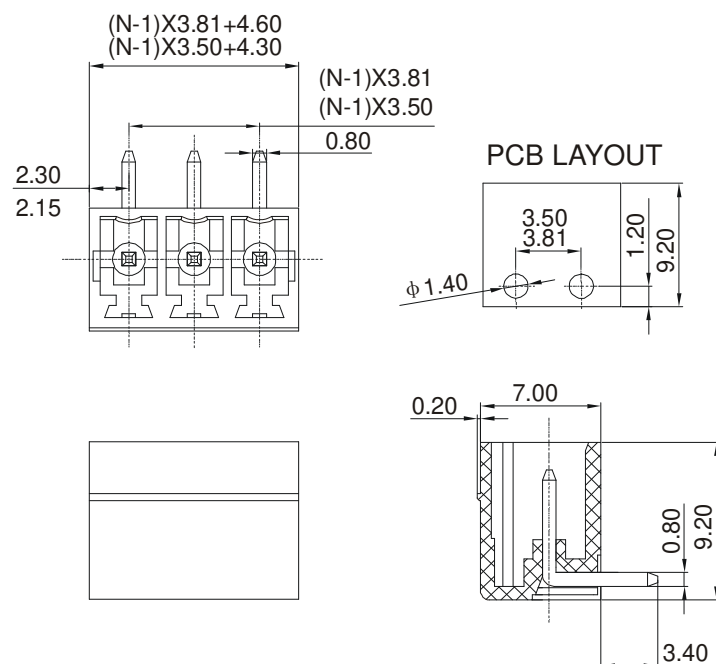

APPROVAL	 	
Electrical		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Withstanding voltage	AC2000V/1Min	
Mechanical		
Ambient temperature	-40℃~+105℃	
Dimensions		
Pitch	3.5mm(.138") 3.81mm(.150")	
Poles	2P-24P	
Material		
Housing	PA66,UL94V-0	
Pin header	Brass,Tin-plated	

HOW TO ORDER :

	-		P	-		-							
					1			X	X	X			
								Customer Request					
Series number		No. of pole						Color					
					1	Single pitch		1	Grey	4	Green	7	Trans Parent
					2	Double pitch		2	Blue	5	Orange	8	Yellow
								3	Black	6	Red	9	White

	 DEGSON ELECTRONICS CO., LTD.
	NAME 15EDGRC-3.5, 15EDGRC-3.81