






EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.




15EDGK-3.5
15EDGK-3.81


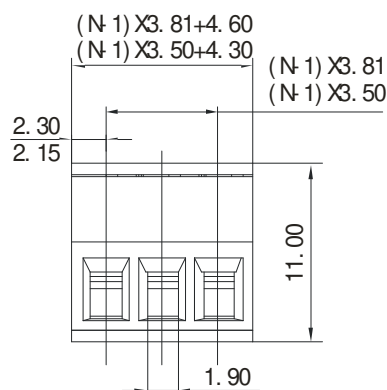


A 向视图

APPROVAL			
Electrical			
Standard		UL	IEC
Rated voltage		300V	250V
Rated current		8A	7A
Wire range		28-16AWG	0.5-1.5mm ²
Withstanding voltage		AC2000V/1Min	
Mechanical			
Torque		0.2Nm(1.7Lb-In)	
Ambient temperature		-40℃~+105℃	
Strip length		7mm	
Dimensions			
Pitch		3.5mm(.138") 3.81mm(.150")	
Poles		2P-24P	
Material			
Housing		PA66,UL94V-0	
Screws		M2,Steel,Cr ³ +Zn-plated	
Contact		Phosphor bronze	
Cage		Brass,Ni-plated	

HOW TO ORDER :

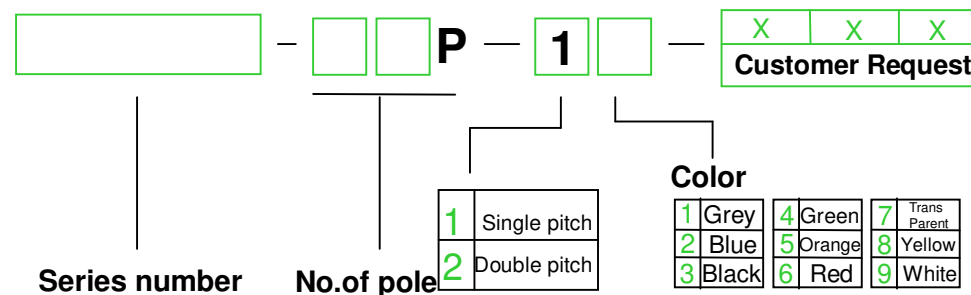

		 DEGSON ELECTRONICS CO., LTD.	
		NAME 15EDGK-3.5, 15EDGK-3.81	