



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.



Features :

- 3 stage charging
- AC 115/230VAC selected by switch
- Built-in passive PFC function compliance to EN61000-3-2 Class A (option)
- Protection: Overload / Short circuit / Reverse polarity / Over voltage / Over temperature
- Charger for lead-acid batteries
- 2 color LED loading indicator
- Low cost, High reliability
- FAN on/off control(Depends on charging current)
- 2 years warranty



PB - 300/360 P - 12

1.300W without FAN
2.360W with FAN

P:With Passive PFC
N:Without Passive PFC

12:14.4V
24:28.8V
48:57.6V


SPECIFICATION

MODEL		PB-360□-12		PB-360□-24		PB-360□-48	
OUTPUT	BOOST CHARGE VOLTAGE	14.4V		28.8V		57.6V	
	FLOAT CHARGE VOLTAGE	13.6V		27.2V		54.4V	
	VOLTAGE ADJUSTABLE RANGE	13 ~ 14.7V		26 ~ 28.8V		52 ~ 58.6V	
	RECOMMENDED BATTERY CAPACITY(AMP HOURS)(Note 5)	80 ~ 200Ah		40 ~ 125Ah		20 ~ 65Ah	
	BATTERY TYPE	Open & Sealed Lead Acid					
	OUTPUT CURRENT	24.3A		12.5A		6.25A	
INPUT	VOLTAGE RANGE	90 ~ 132VAC / 180 ~ 264VAC selected by switch					
	FREQUENCY RANGE	47 ~ 63Hz					
	EFFICIENCY (Typ.)	85%		86%		87%	
	POWER FACTOR (Typ.)	>0.65 (with P type) at 230VAC					
	AC CURRENT (Typ.)	7A/115VAC 3.5A/230VAC					
	INRUSH CURRENT (Typ.)	COLD START 60A					
	LEAKAGE CURRENT	<3.5mA / 240VAC					
PROTECTION	OVERLOAD	90 ~ 110% rated output current Protection type : Constant current limiting, recovers automatically after fault condition is removed					
	SHORT CIRCUIT	O/P Built in fuse (FS100) to protect short circuit condition, shut down o/p voltage and can not re-power on					
	REVERSE POLARITY	By internal fuse					
	OVER VOLTAGE	16 ~ 18V		31 ~ 35V		59 ~ 64V	
		Protection type : Shut down o/p voltage, re-power on to recover					
	OVER TEMPERATURE	Protection type : Automatically derate charge current until zero					
FUNCTION	REMOTE CONTROL (CN5)	Open: Normal work Short: Stop Charging					
ENVIRONMENT	WORKING TEMP.	-20 ~ +60℃ (Refer to output load derating curve)					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +85℃, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.05%/℃ (0 ~ 45℃)					
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes					
SAFETY & EMC (Note 4)	SAFETY STANDARDS	IEC60335-2-29 CB approved by TUV(except for 48V), UL60950-1 approved					
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC					
	EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22) Class B					
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3 (only P type)					
	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN55024, light industry level, criteria A					
OTHERS	MTBF	115.8Khrs min. MIL-HDBK-217F (25℃)					
	DIMENSION	253*135*48.5mm(L*W*H)					
	PACKING	1.5Kg; 6pcs/10Kg/0.95CUFT					
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. 5. This is Mean Well's suggested range. Please consult your battery manufacturer for their suggestions about maximum charging current limitation.						

■ Mechanical Specification

Case No.801A


Unit:mm

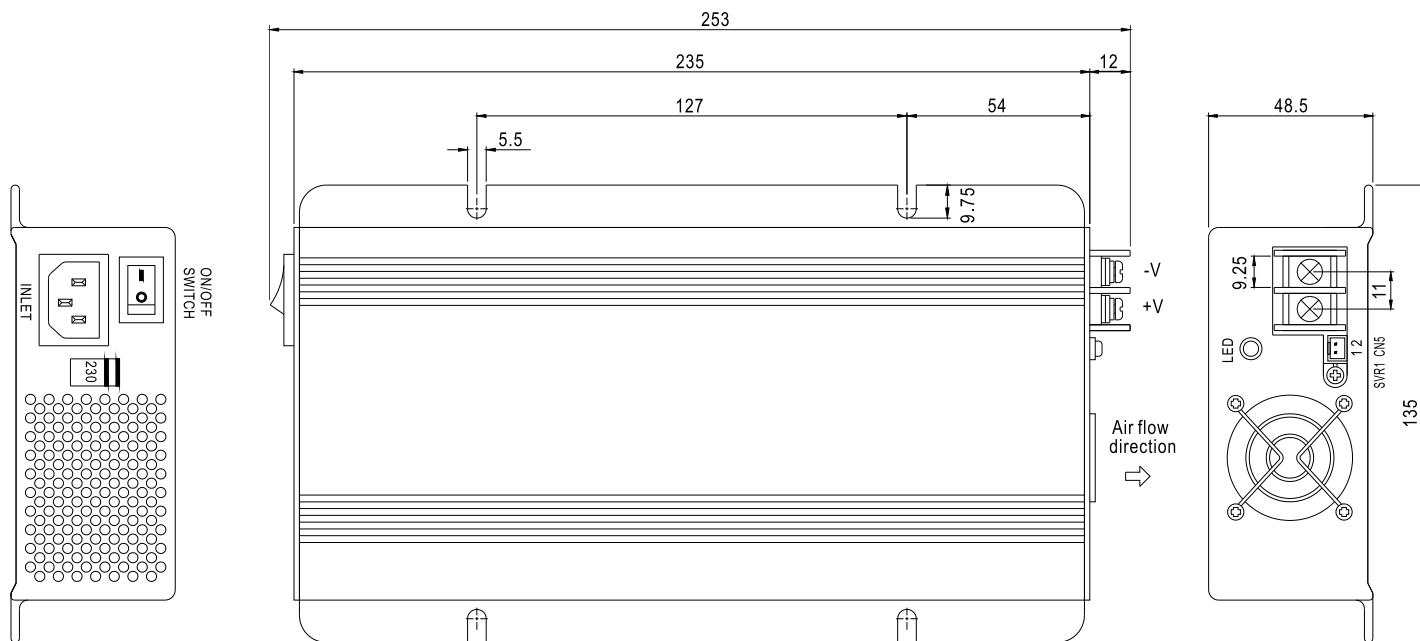


Remote Control(CN5) : JST B2B-XH or equivalent

Assignment	Mating Housing	Terminal
PIN1,2 Open: Normal work	JST XHP or equivalent	JST SXH-001T-P0.6 or equivalent
PIN1,2 Short: Stop Charging		

■ Block Diagram

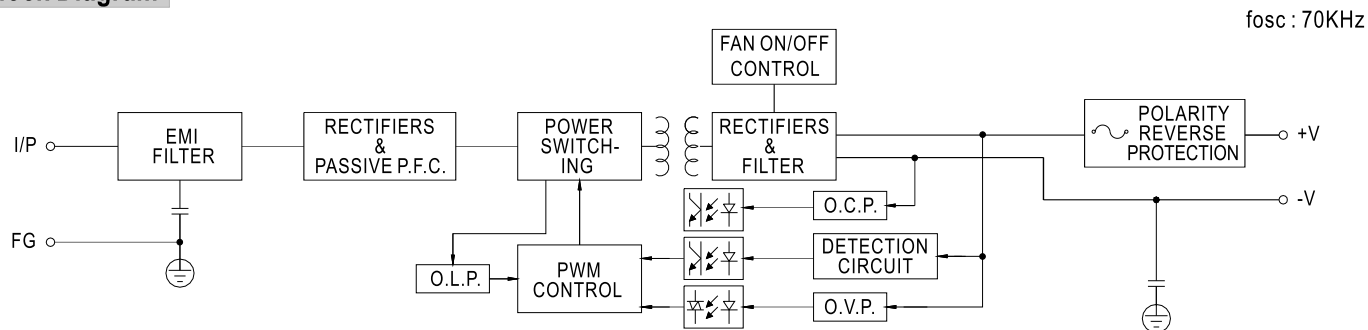

■ Charging Curve

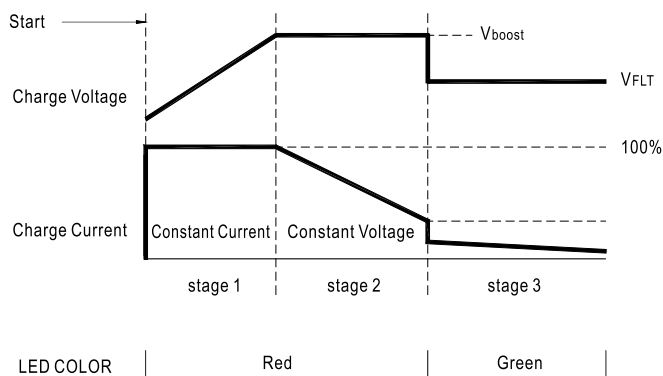

State	PB-360-12	PB-360-24	PB-360-48
Vboost	14.4V	28.8V	57.6V
VFLT	13.6V	27.2V	54.4V

■ Output Load VS Temperature

