



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

"High Frequency Ceramic Solutions"

2.45 GHz Balun

Detail Specification

P/N 2450BL15B100


Rev. 10/31/01 Page 1 of 2

Part Number	Frequency (MHz)	Impedance Unbal. / Bal.	Insertion Loss	Return Loss	Phase Difference	Amplitude Difference
2450BL15B100_	2400 - 2500	50/100 Ω	1.0 dB max.	9.5 dB min.	180°±10°	2.0 dB max.

Input Power	Impedance	Operating Temperature Range	Reel Qty
3 Watts max	50 /100 Ω	-40 to +85°C	4,000


Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.079 ± .004	0.049 ± .004	0.034 ± .004	0.012 ± .004	0.008 ± .004	0.012 ± .004/-0.008	0.014 ± .004	0.026 ± .002
mm	2.0 ± 0.1	1.25 ± 0.1	0.85 ± 0.1	0.30 ± 0.1	0.20 ± 0.1	0.30±0.1/-0.2	0.35 ± 0.1	0.65 ± 0.05

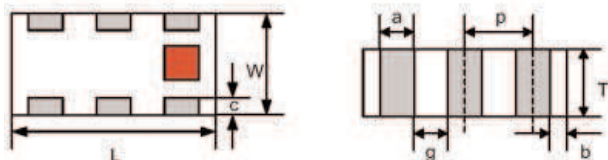


Terminal Configuration

1	Unbalanced Port	4	Balanced Port
2	GND or DC Feed	5	GND
3	Balanced Port	6	NC



Mounting Considerations

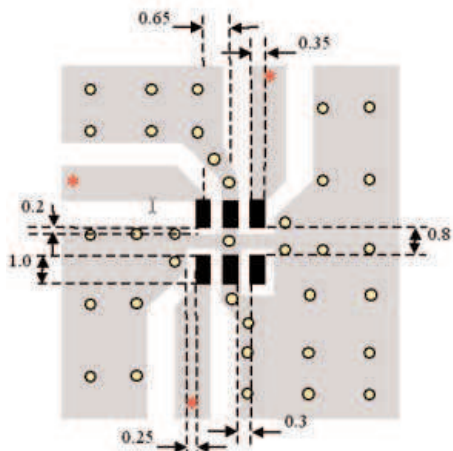


Without DC feed



Mount devices with colored mark facing up.


* Line width should be designed to provide 50 Ω impedance matching characteristics.

By-pass capacitor(s) should be connected when feeding DC power.

-  Solder Resist
-  Land
-  Through-hole (ϕ 0.3)

Units: mm

With DC feed

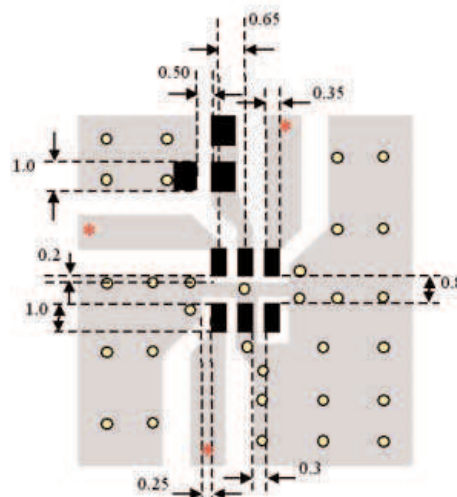

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.

“High Frequency Ceramic Solutions”

2.45 GHz Balun

Detail Specification

P/N 2450BL15B100

Rev. 10/31/01 Page 2 of 2

P/N 2450BL15B100 Balun Typical **Return Loss** & Insertion Loss

