



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

International
IOR Rectifier

MBR25..CT
MBRB25..CT
MBR25..CT-1

SCHOTTKY RECTIFIER

30 Amp

$$I_{F(AV)} = 30\text{Amp}$$

$$V_R = 35 - 45\text{V}$$

Major Ratings and Characteristics





Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform (Per Device)	30	A
I_{FRM} @ $T_C = 130^\circ\text{C}$ (Per Leg)	30	A
V_{RRM}	35 - 45	V
I_{FSM} @ tp = 5 μs sine	1060	A
V_F @ 30 Apk, $T_J = 125^\circ\text{C}$	0.73	V
T_J range	-65 to 150	$^\circ\text{C}$

Description/ Features

This center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150°C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150°C T_J operation
- Center tap TO-220 and D²Pak packages
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Case Styles

MBR25..CT	MBRB25.. CT	MBR25..CT -1
  TO-220	  D²PAK	  TO-262

Voltage Ratings

Parameters	MBR2535CT MBRB2535CT MBR2535CT-1	MBR2545CT MBRB2545CT MBR2545CT-1
V_R Max. DC Reverse Voltage (V)	35	45
V_{RWM} Max. Working Peak Reverse Voltage (V)		

Absolute Maximum Ratings

Parameters	Values	Units	Conditions
$I_{F(AV)}$ Max. Average Forward (Per Leg) Current (Per Device)	15 30	A	@ $T_C = 130^\circ\text{C}$, (Rated V_R)
I_{FRM} Peak Repetitive Forward Current (Per Leg)	30	A	Rated V_R , square wave, 20kHz $T_C = 130^\circ\text{C}$
I_{FSM} Non Repetitive Peak Surge Current	1060 150	A	5 μs Sine or 3 μs Rect. pulse Following any rated load condition and with rated V_{RWM} applied Surge applied at rated load conditions halfwave, single phase, 60Hz
E_{AS} Non-Repetitive Avalanche Energy	16	mJ	(Per Leg) $T_J = 25^\circ\text{C}$, $I_{AS} = 2\text{ Amps}$, $L = 8\text{ mH}$
I_{AR} Repetitive Avalanche Current (Per Leg)	2	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	Values	Units	Conditions
V_{FM} Max. Forward Voltage Drop (1)	0.82 0.73	V	@ 30A $T_J = 25^\circ\text{C}$ @ 30A $T_J = 125^\circ\text{C}$
I_{RM} Max. Instantaneous Reverse Current (1)	0.2 40	mA	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$ Rated DC voltage
$V_{F(TO)}$ Threshold Voltage	0.355	V	$T_J = T_J \text{ max.}$
r_t Forward Slope Resistance	12.3	m Ω	
C_T Max. Junction Capacitance	700	pF	$V_R = 5V_{DC}$, (test signal range 100Khz to 1Mhz) 25°C
L_S Typical Series Inductance	8.0	nH	Measured from top of terminal to mounting plane
dv/dt Max. Voltage Rate of Change (Rated V_R)	10000	V/ μs	

(1) Pulse Width < 300 μs , Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters	Values	Units	Conditions
T_J Max. Junction Temperature Range	-65 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-65 to 175	$^\circ\text{C}$	
R_{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	1.5	$^\circ\text{C/W}$	DC operation
R_{thCS} Typical Thermal Resistance Case to Heatsink	0.50	$^\circ\text{C/W}$	Mounting surface, smooth and greased Only for TO-220
wt Approximate Weight	2 (0.07)	g (oz.)	
T Mounting Torque	Min. 6 (5) Max. 12 (10)	Kg-cm (lbf-in)	Non-lubricated threads

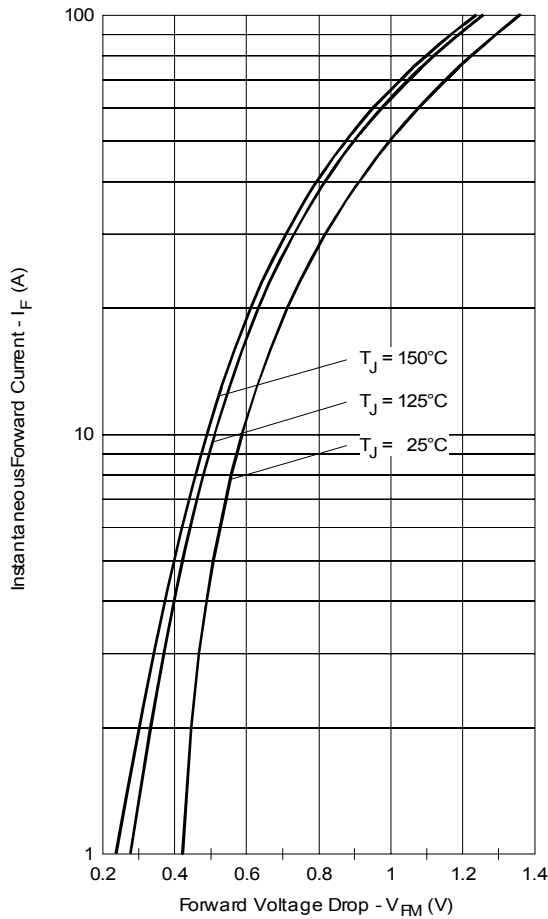


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

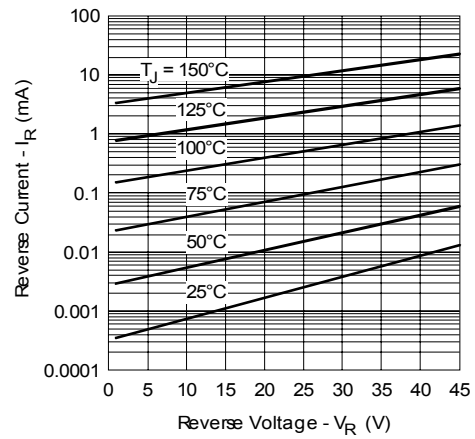


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

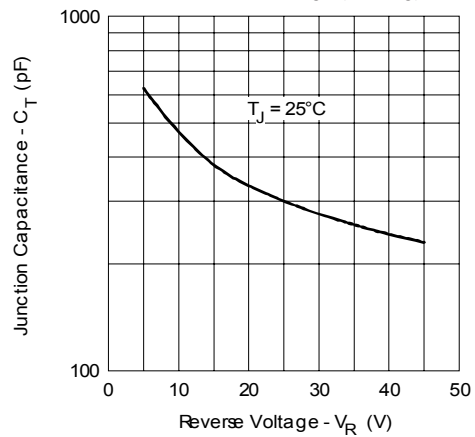


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

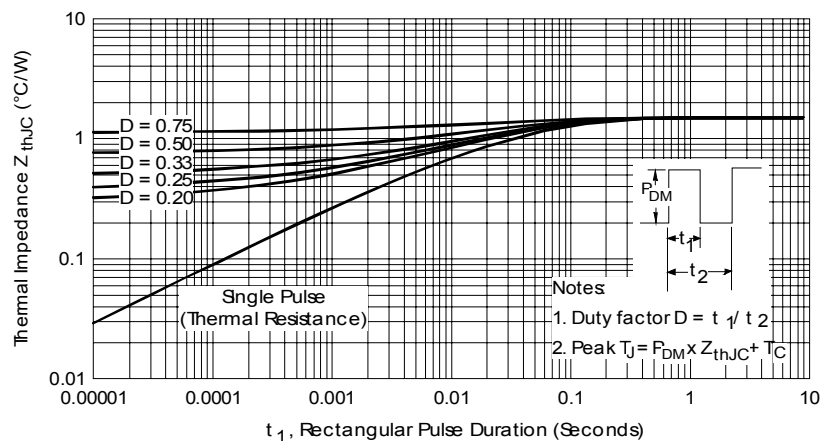


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

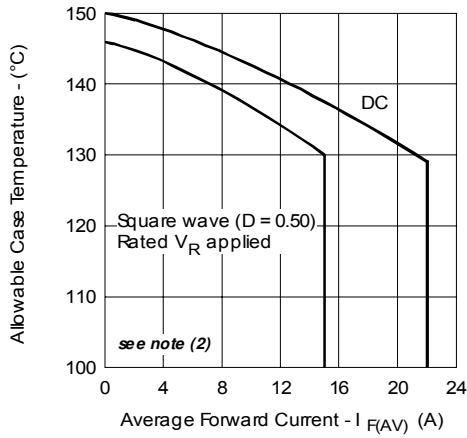


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

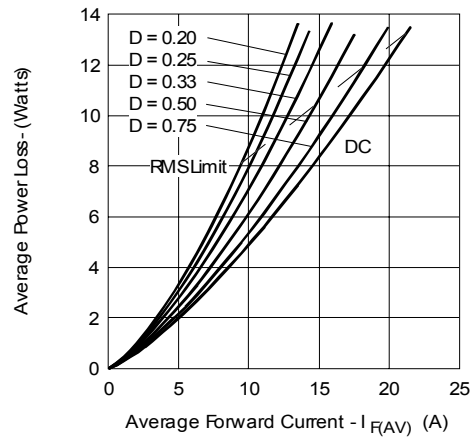


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

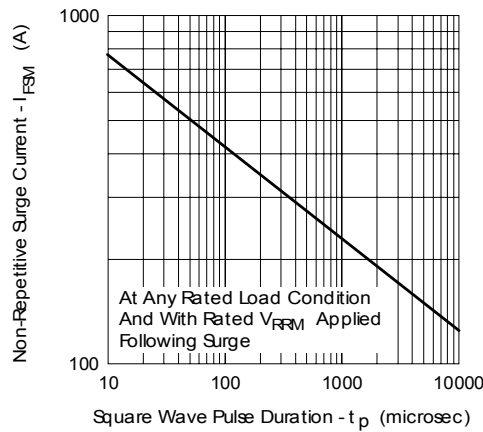




Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

(2) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;


P_d = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

$P_{d_{REV}}$ = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1}$ = rated V_R


Outline Table

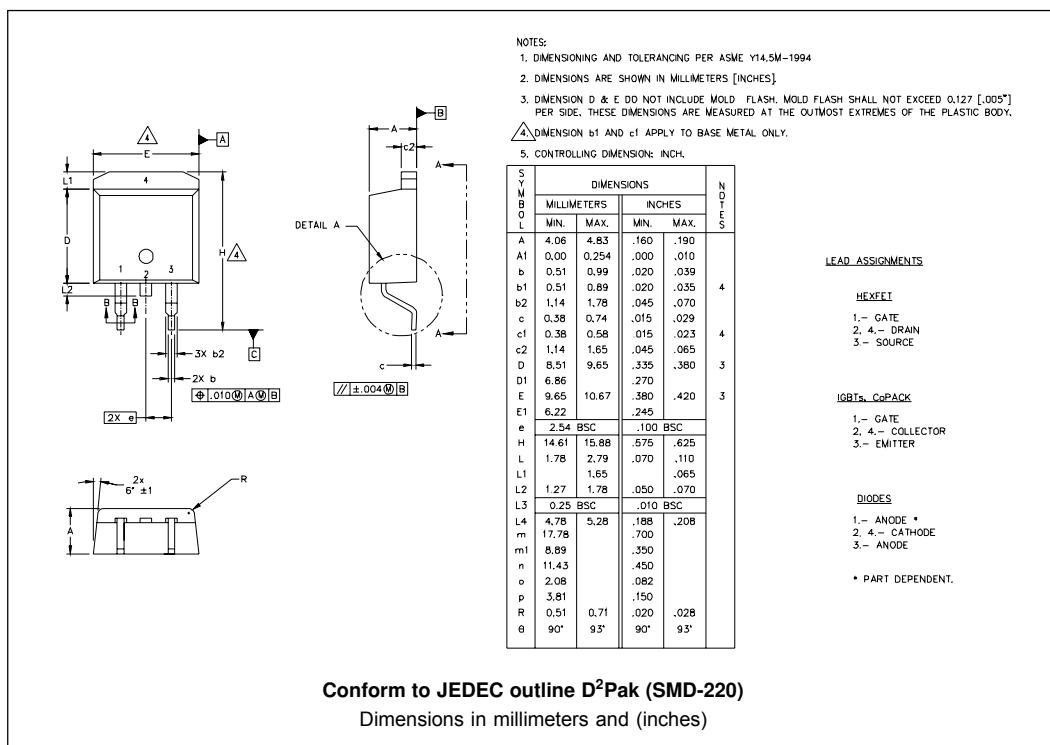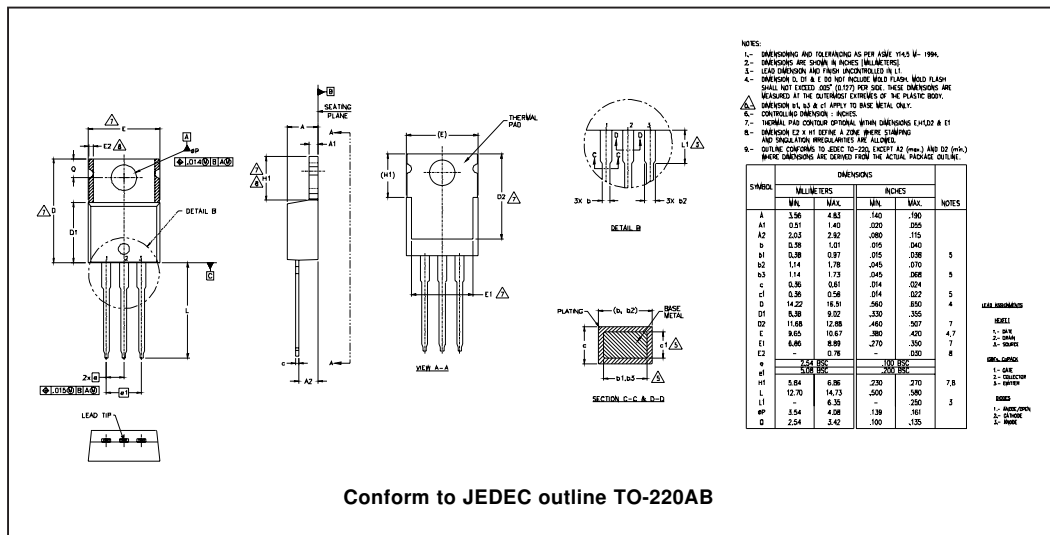

Outline Table

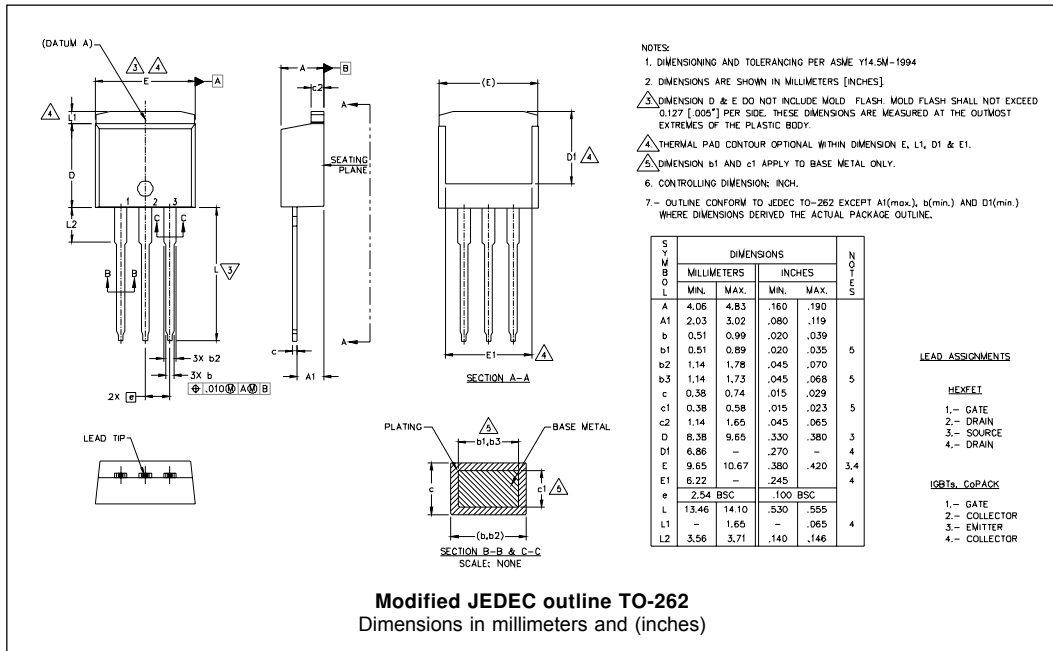


Tape & Reel Information

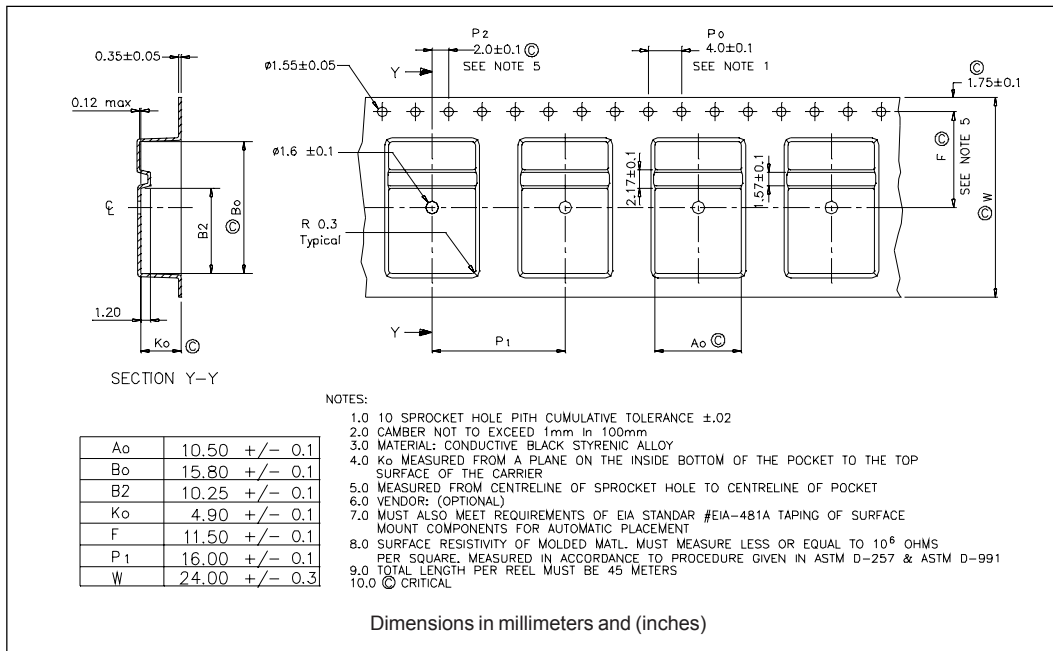

Part Marking Information


TO-220

EXAMPLE: THIS IS A MBR2545CT
LOT CODE 1789
ASSEMBLED ON WW 19, 2000
IN THE ASSEMBLY LINE "C"

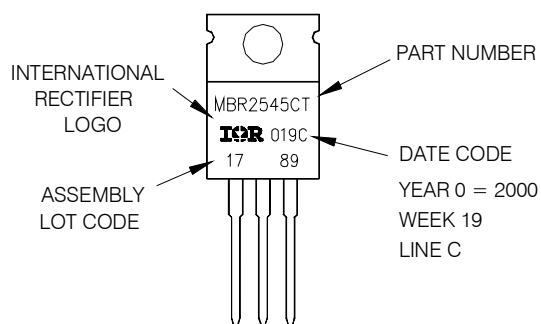


D²PAK

EXAMPLE: THIS IS A MBRB2545CT
LOT CODE 8024
ASSEMBLED ON WW 02, 2003
IN ASSEMBLY LINE "C"

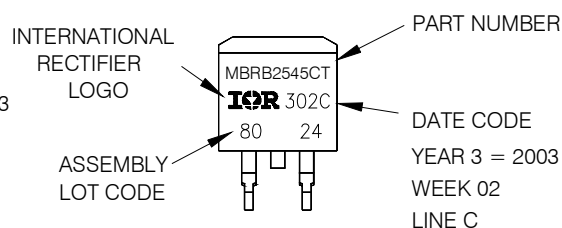

TO-262

EXAMPLE: THIS IS A MBR2545CT-1
LOT CODE 1789
ASSEMBLED ON WW 19, 2002
IN ASSEMBLY LINE "C"

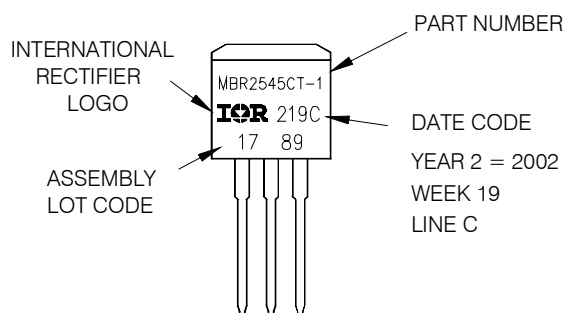

Ordering Information Table

Device Code

MBR	B	25	45	CT	-1	TRL	-
1	2	3	4	5	6	7	8

1	-	Essential Part Number	
2	-	• B = D²Pak 6 none • none = TO-262 6 = -1	
3	-	Current Rating (25 = 25A)	35 = 35V 45 = 45V
4	-	Voltage Ratings	
5	-	CT = Essential Part Number	
6	-	• none = D²Pak 2 = B • -1 = TO-262 2 none	
7	-	• none = Tube (50 pieces) • TRL = Tape & Reel (Left Oriented - for D²Pak only) • TRR = Tape & Reel (Right Oriented - for D²Pak only)	
8	-	• none = Standard Production • PbF = Lead-Free (for TO-262 and D²Pak tube) • P = Lead-Free (for D²Pak TRR and TRL)	

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 01/07