



EN: This Datasheet/Document is presented by the manufacturer.

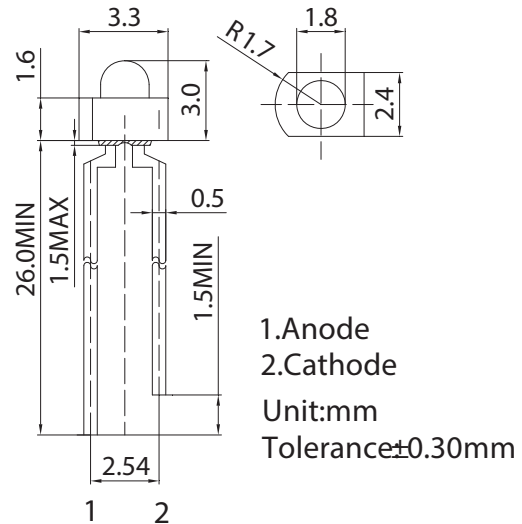
Please visit our website for pricing and availability at www.hestore.hu.

1.8mm Tower Pure White LED**EVL-18-703 WHITE****■Features**

- High Luminous LEDs
- 1.8mm Tower Standard Directivity
- Long Lifetime Operation (Up to 100,000 hours)
- Superior Weather-resistance
- UV Resistant Epoxy
- Water Clear Type

■Applications

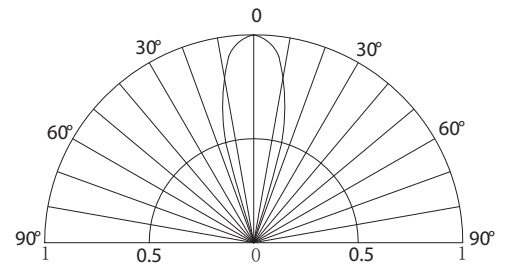
- Electronic Signs And Signals
- Small Area Illuminations
- Back Lighting
- Other Lighting

■Outline Dimension**■Absolute Maximum Rating**

(Ta=25°C)

Item	Symbol	Value	Unit
DC Forward Current	I_F	30	mA
Pulse Forward Current*	I_{FP}	100	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	108	mW
Operating Temperature	T_{opr}	-30 ~ +85	°C
Storage Temperature	T_{stg}	-40 ~ +100	°C
Lead Soldering Temperature	T_{sol}	260°C/5sec	-

*Pulse width Max 10ms , Duty ratio max 1/10

■Directivity**■Electrical -Optical Characteristics**

(Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	V_F	$I_F=20$ mA	2.9	3.1	3.6	V
DC Reverse Current	I_R	$V_R=5$ V	-	-	10	μ A
Luminous Intensity*	I_v	$I_F=20$ mA	4200	5800	-	mcad
Chromaticity Coordinates*	x	$I_F=20$ mA	-	0.27	-	
	y	$I_F=20$ mA	-	0.28	-	
50% Power Angle	$2\theta_{1/2}$	$I_F=20$ mA	-	30	-	deg

*1 Tolerance of chromaticity coordinates is $\pm 10\%$ *2 Tolerance of luminous intensity is $\pm 15\%$ **LED & Application Technologies**

VER A.0