




EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

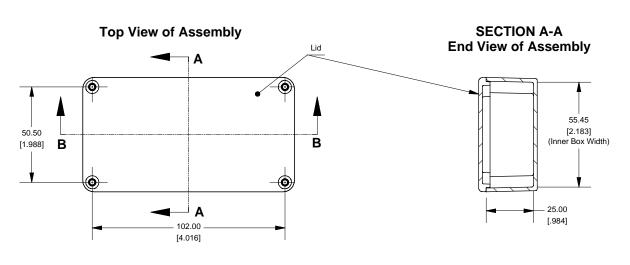




SECTION B-B Side View of Assembly 2.00 [.079] (Inner Box Height) 106.95 [4.211] (Inner Box Length)



103.86 [4.089] [2.382] [2.130]

Lid



Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory mjm@hammondmfg.com for quotes
Solid models of this enclosure available in STEP or IGES.

	s box, lid and 4 cover screws.	
Box and lid are made from Di	ecast Aluminum Alloy (alloy type 380).	

PART NUMBERS 1590B Enclosure			
			Unfinished
Grey Textured Polyester Powder Paint - RAL 7038	1590BGY		
Black Textured Polyester Powder Paint - RAL 9011	1590BBK		
1590B Liquid Resistant Enclosure (Silicon Factory Installed Gasket)			
Unfinished	1590WB		
Black Textured Powder Paint	1590WBBK		
ACCESSORIES			
Recommended Torque: 75 ozf.in / 55 cN.m			
Black Textured Cover Screws (Pkg 50) [6-32 x 1/2" SS Type 304]	1590WMS100BK		
Unfinshed Cover Screws (Pkg 100) [6-32 x 1/2" Nickel Plated Screws]	1590W MS100		
Standard Cover Screws			
Unfinshed Cover Screws (Pkg 100) [6-32 x 1/2" Nickel Plated Screws]	1590MS100		
Black Textured Cover Screws (Pkg 50) [6-32 x 1/2" SS Type 304]	1590MS100BK		



2

 Δ