

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

INTERCHANGEABLE WALL PLUG POWER SUPPLY 5.1VDC 15.3WATT



T7730DV

Features:

- Interchangeable AC Heads
- Compatible with Pi4
- 1 Year Warranty
- Level VI Efficiency
- Worldwide Approvals



Description:

The Stontronics 5.1Vdc 3Amp Interchangeable Power supply with USB Type C output connector is specifically designed to be compatible with the new Pi4 Single Board computer. The unit is finished in White and comes complete with UK & Euro AC Heads with all the relevant country approvals.


Specification	
Part Code	T7730DV
Input Voltage Range	90-264 Vac
Input Frequency Range	47-63Hz
Input Current Rated	0.6A Max
Input AC Heads	UK & Euro
Output Voltage Rating	+5.1V
Output Current Range	3A
Output Min Current	0A
Output Connector	USB Type C
Total Output Regulation	+/- 5%
Line and Load Regulation	+/- 2%
Ripple & Noise	240mVp-p
Efficiency	81.97% Min
Over Voltage Protection	10Vdc Maximum
Over Current Protection	5A maximum with auto-recovery function
Short Circuit Protection	The adapter shall not be damaged by short the DC output to Ground
Operating Temperature	0°C to 40°C
Storage Temperature	-20°C to +60°C
Operating Humidity	20% to 85%
Storage Humidity	5% to 95%
Hi-Pot	3000VAC 10mA 1min
Leakage Current	0.25mA max
Safety Standard	UL/CUL(UL62368); TUV-GS(EN62368); SAA(AS/NZS62368); PSE(J62368-1); CCC; T-License(BS EN 62368-1)
EMI Standard	FCC(PART 15 CLASS B); CE(EN55032); PSE(J55032)
MTBF	50K Hours
Size mm max.	74.5(L) x 36(W) x 54(H)
Weight	115g± 15%

INTERCHANGEABLE WALL PLUG POWER SUPPLY 5.1VDC 15.3WATT



T7730DV

Diagrams

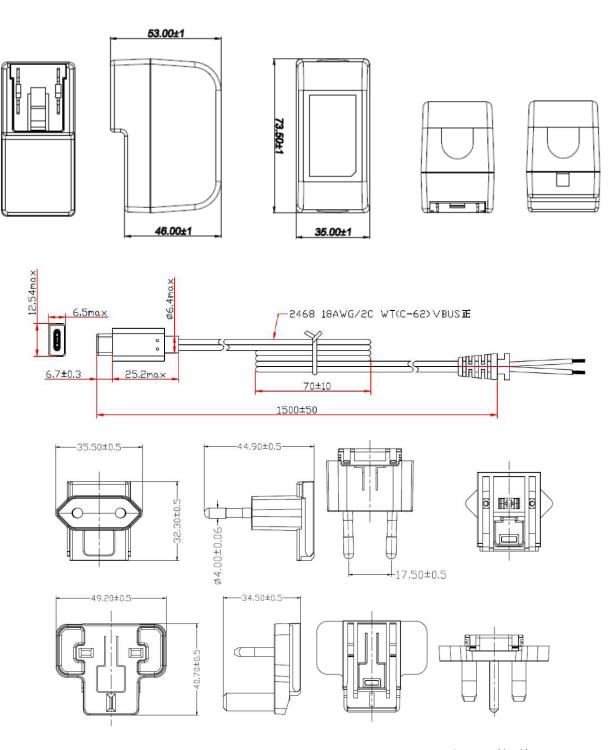

In partnership with: