



**HESTORE.HU**  
elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

# General Purpose Multilayer Ceramic Capacitors 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



**RoHS  
Compliant**

## Description:

MLCC consists of a conducting material and electrodes. To manufacture a chip-type SMT and achieve miniaturization, high density and high efficiency, ceramic condensers are used. The MLCC is made by NPO, X7R, X6S, X5R and Y5V dielectric material and which provides product with high electrical precision, stability and reliability.

## Features:

- A wide selection of sizes is available (0201 to 1812).
- High capacitance in given case size.
- Capacitor with lead-free termination (pure Tin).


## Applications:

- For general digital circuit.
- For power supply bypass capacitors.
- For consumer electronics.
- For telecommunication.

## How To Order:

MC	1206	B	104	K	500	C	T
	<u>Size</u>	<u>Dielectric</u>	<u>Capacitance</u>	<u>Tolerance</u>	<u>Rated Voltage</u>	<u>Termination</u>	<u>Packaging style</u>
Multicomp	Inch (mm) 0201 (0603) 0402 (1005) 0603 (1608) 0805 (2012) 1206 (3216) 1210 (3225) 1812 (4532)	N=NPO (C0G) B=X7R F=Y5V X=X5R S=X6S	Two significant digits followed by no. of zeros. And R is in place of decimal point.  Eg.: 0R5=0.5pF 1R0=1.0pF 104 = $10 \times 10^4$ = 100nF	A= $\pm 0.05$ pF B= $\pm 0.1$ pF C= $\pm 0.25$ pF D= $\pm 0.5$ pF F= $\pm 1\%$ G= $\pm 2\%$ J= $\pm 5\%$ K= $\pm 10\%$ M= $\pm 20\%$ Z= $-20/+80\%$	Two significant digits followed by no. of zeros. And R is in place of decimal point.  4R0=4V DC 6R3=6.3V DC 100=10V DC 160=16V DC 250=25V DC 500=50V DC 101=100V DC	C=Cu/Ni/Sn	T=7" reeled R=7" reeled (2mm pitch for 0603 size; paper tape) G=13" reeled

## External Dimensions:



The outline of MLCC

Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol	Soldering Method *	M <sub>B</sub> (mm)	
01R5 (0402)	0.4 $\pm 0.02$	0.2 $\pm 0.02$	0.2 $\pm 0.02$	V	R	0.1 $\pm 0.03$
0201 (0603)	0.6 $\pm 0.03$	0.3 $\pm 0.03$	0.3 $\pm 0.03$	L	R	0.15 $\pm 0.05$
	0.6 $\pm 0.05^{#2}$	0.3 $\pm 0.05^{#2}$	0.3 $\pm 0.05^{#2}$			0.15 $+0.1/-0.05$
	0.6 $\pm 0.09^{#3}$	0.3 $\pm 0.09^{#3}$	0.3 $\pm 0.09^{#3}$			
0402 (1005)	1 $\pm 0.05$	0.5 $\pm 0.05$	0.5 $\pm 0.05$	N	R	0.25 +0.05/-0.1
			0.5 $+0.02/-0.05$	Q		
	1 $\pm 0.2$	0.5 $\pm 0.2$	0.5 $\pm 0.2$	E		

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol		Soldering Method *	M <sub>B</sub> (mm)
0603 (1608)	1.6 ±0.1	0.8 ±0.1	0.8 ±0.07	S	R / W	0.4 ±0.15
	1.6 +0.15/-0.1	0.8 +0.15/-0.1	0.5 ±0.1	H	R / W	
	1.6 ±0.2 <sup>#1</sup>	0.8 ±0.2 <sup>#1</sup>	0.8 +0.15/-0.1	X	R / W	
0805 (2012)	2 ±0.15	1.25 ±0.1	0.5 ±0.1	H	R / W	0.5 ±0.2
			0.6 ±0.1	A	R / W	
			0.8 ±0.1	B	R / W	
			1.25 ±0.1	D	R	
	2 ±0.2	1.25 ±0.2	0.85 ±0.1	T	R / W	
			1.25 ±0.2	I	R	
1206 (3216)	3.2 ±0.15	1.6 ±0.15	0.8 ±0.1	B	R / W	0.6 ±0.2 (0.5±0.25)***
			0.95 ±0.1	C	R	
			1.25 ±0.1	D	R	
	3.2 ±0.2	1.6 ±0.2	1.15 ±0.15	J	R	
			1.6 ±0.2	G	R	
		1.6 ±0.2	0.85 ±0.1	T	R / W	
	3.2 +0.3/-0.1	1.6 +0.30/-0.1	1.6 +0.3/-0.1	P	R	
1210 (3225)	3.2 ±0.3	2.5±0.2	0.95 ±0.1	C	R	0.75 ±0.25
			0.85 ±0.1	T	R	
			1.25 ±0.1	D	R	
	3.2±0.4	2.5±0.3	1.6 ±0.2	G	R	
			2 ±0.2	K	R	
			2.5 ±0.3	M	R	
		2.5±0.3	1.25 ±0.1	D	R	
1808 (4520)	4.5 ±0.4 (4.5+0.5/-0.3)**	2.03 ±0.25	1.4 ±0.15	F	R	0.75 ±0.25 (0.5±0.25)***
			1.6 ±0.2	G	R	
			2 ±0.2	K	R	
			1.25 ±0.1	D	R	
1812 (4532)	4.5 ±0.4 4.5+0.5/-0.3)**	3.2 ±0.3	1.6 ±0.2	G	R	0.75 ±0.25 0.5±0.25)***
			2 ±0.2	K	R	
			2.5 ±0.3	M	R	
		3.2 ±0.4	2.8 ±0.3	U	R	

\* R = Reflow soldering process; W = Wave soldering process.

\*\* For 1808\_200V ~3kV, 1812\_200V~3kV and safety certificated products.

\*\*\* For 1206\_1000V ~3kV, 1808\_200V ~3kV, 1812\_200V~3kV and safety certificated products.

#1: For 0603/Cap≥10μF or 0603(>10V)/Cap>1μF products.

#2: For 0201/Cap≥0.68μF products.

#3: For 0201/Cap >1μF products.

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



### General Electrical Data:

Dielectric	NP0	X7R	Y5V	X5R	X6S
Size	0402, 0603, 0805, 1206, 1210, 1812				
Capacitance range*	0.1pF to 0.1μF	100pF to 47μF	0.01μF to 100μF	100pF to 220μF	0.1μF to 100μF
Capacitance tolerance**	Cap≤5pF#1: A ( $\pm 0.05\text{pF}$ ), B ( $\pm 0.1\text{pF}$ ), C ( $\pm 0.25\text{pF}$ ) 5pF<Cap<10pF: C ( $\pm 0.25\text{pF}$ ), D ( $\pm 0.5\text{pF}$ ) Cap≥10pF: F ( $\pm 1\%$ ), G ( $\pm 2\%$ ), J ( $\pm 5\%$ ), K ( $\pm 10\%$ )	J ( $\pm 5\%$ ), K ( $\pm 10\%$ ), M ( $\pm 20\%$ )	M ( $\pm 20\%$ ), Z (-20/+80%)	K ( $\pm 10\%$ ), M ( $\pm 20\%$ )	K ( $\pm 10\%$ ), M ( $\pm 20\%$ )
Rated voltage (WVDC)	10V, 16V, 25V, 50V, 100V	6.3V, 10V, 16V, 25V, 50V, 100V		4V, 6.3V, 10V, 16V, 25V, 50V	
DF(Tan δ)*	Cap<30pF: Q≥400+20C Cap≥30pF: Q≥1000	Note 1			
Operating temperature	-55 to +125°C		-25°C to +85°C	-55°C to +85°C	-55°C to +105°C
Capacitance characteristic	±30ppm	±15%	+30/-80%	±15%	±22%
Termination	Ni/Sn (lead-free termination)				

#1: NP0, 0.1pF product only provide B tolerance

\* Measured at the condition of 30~70% related humidity.

NP0: Apply  $1.0 \pm 0.2\text{Vrms}$ ,  $1.0\text{MHz} \pm 10\%$  for Cap≤1000pF and  $1.0 \pm 0.2\text{Vrms}$ ,  $1.0\text{kHz} \pm 10\%$  for Cap>1000pF, 25°C at ambient temperature

X7R/X6S/X5R: Apply  $1.0 \pm 0.2\text{Vrms}$ ,  $1.0\text{kHz} \pm 10\%$ , at 25°C ambient temperature.

Y5V: Apply  $1.0 \pm 0.2\text{Vrms}$ ,  $1.0\text{kHz} \pm 10\%$ , at 20°C ambient temperature.

\*\* Preconditioning for Class II MLCC: Perform a heat treatment at  $150 \pm 10^\circ\text{C}$  for 1 hour, then leave in ambient condition for  $24 \pm 2$  hours before measurement.

# General Purpose Multilayer Ceramic Capacitors 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



## Note 1:

X7R/X5R/X6S

Rated Vol.	D.F. $\leq$	Exception of D.F. $\leq$	
$\geq 100V$	$\leq 2.5\%$	$\leq 3\%$	1206 $\geq 0.47\mu F$
		$\leq 5\%$	0805 $> 0.1\mu F$ , 0603 $\geq 0.068\mu F$ , 1206 $> 1\mu F$ ; TT series
50V	$\leq 2.5\%$	$\leq 3\%$	0201(50V); 0603 $\geq 0.047\mu F$ ; 0805 $\geq 0.18\mu F$ ; 1206 $\geq 0.47\mu F$
		$\leq 5\%$	1210 $\geq 4.7\mu F$
		$\leq 10\%$	0402 $\geq 0.1\mu F$ ; 0603 $\geq 1\mu F$ ; 0805 $\geq 1\mu F$ ; 1206 $\geq 2.2\mu F$ ; 1210 $\geq 10\mu F$ ; TT series
		$\leq 3.5\%$	0603 $\geq 1\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1210 $\geq 10\mu F$
25V	$\leq 3.5\%$	$\leq 5\%$	0201 $\geq 0.01\mu F$ ; 0805 $\geq 1\mu F$ ; 1210 $\geq 10\mu F$
		$\leq 7\%$	0603 $\geq 0.33\mu F$ ; 1206 $\geq 4.7\mu F$
		$\leq 10\%$	0402 $\geq 0.10\mu F$ ; 0603 $\geq 0.47\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1206 $\geq 6.8\mu F$ ; 1210 $\geq 22\mu F$ ; TT series
		$\leq 12.5\%$	0402 $\geq 1\mu F$
16V	$\leq 3.5\%$	$\leq 5\%$	0201 $\geq 0.01\mu F$ ; 0402 $\geq 0.033\mu F$ ; 0603 $\geq 0.15\mu F$ ; 0805 $\geq 0.68\mu F$ ; 1206 $\geq 2.2\mu F$ ; 1210 $\geq 4.7\mu F$
		$\leq 10\%$	0201 $\geq 0.1\mu F$ ; 0402 $\geq 0.22\mu F$ ; 0603 $\geq 0.68\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1206 $\geq 4.7\mu F$ ; 1210 $\geq 22\mu F$ ; TT series
10V	$\leq 5\%$	$\leq 10\%$	0201 $\geq 0.012\mu F$ ; 0402 $\geq 0.33\mu F$ (0402/X7R $\geq 0.22\mu F$ ); TT series 0603 $\geq 0.33\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1206 $\geq 2.2\mu F$ ; 1210 $\geq 22\mu F$
		$\leq 15\%$	0201 $\geq 0.1\mu F$ ; 0402 $\geq 1\mu F$
6.3V	$\leq 10\%$	$\leq 15\%$	0201 $\geq 0.1\mu F$ ; 0402 $\geq 1\mu F$ ; 0603 $\geq 10\mu F$ ; 0805 $\geq 4.7\mu F$ ; 1206 $\geq 47\mu F$ ; 1210 $\geq 100\mu F$ ; TT series
		$\leq 20\%$	0402 $\geq 2.2\mu F$
4V	$\leq 15\%$	---	---

Y5V

Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$	
$\geq 50V$	5%	7%	0603 $\geq 0.1\mu F$ ; 0805 $\geq 0.47\mu F$ ; 1206 $\geq 4.7\mu F$
35V	7%	---	---
25V	5%	7%	0402 $\geq 0.047\mu F$ ; 0603 $\geq 0.1\mu F$ ; 0805 $\geq 0.33\mu F$ ; 1206 $\geq 1\mu F$ ; 1210 $\geq 4.7\mu F$
		9%	0402 $\geq 0.068\mu F$ ; 0603 $\geq 0.47\mu F$ ; 1206 $\geq 4.7\mu F$ ; 1210 $\geq 22\mu F$
16V (C $< 1.0\mu F$ )	7%	9%	0402 $\geq 0.068\mu F$ ; 0603 $\geq 0.68\mu F$
		12.5%	0402 $\geq 0.22\mu F$
16V (C $\geq 1.0\mu F$ )	9%	12.5%	0603 $\geq 2.2\mu F$ ; 0805 $\geq 3.3\mu F$ ; 1206 $\geq 10\mu F$ ; 1210 $\geq 22\mu F$ ; 1812 $\geq 47\mu F$
10V	12.5%	20%	0402 $\geq 0.47\mu F$
6.3V	20%	---	---

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



### Capacitance Range

NP0 Dielectric 0201, 0402, 0603, 0805 Sizes

Dielectric		NP0																	
Size		0201			0402				0603				0805						
Rated Voltage (V DC)		16	25	50	10	16	25	50	100	10	16	25	50	100	10	16	25	50	100
0.1pF (0R1)	L	L	L	N	N	N	N												
0.2pF (0R2)	L	L	L	N	N	N	N												
0.3pF (0R3)	L	L	L	N	N	N	N												
0.4pF (0R4)	L	L	L	N	N	N	N												
0.5pF (0R5)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
0.6pF (0R6)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
0.7pF (0R7)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
0.8pF (0R8)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
0.9pF (0R9)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
1.0pF (1R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
1.2pF (1R2)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
1.5pF (1R5)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
1.8pF (1R8)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
2.0pF (2R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
2.2pF (2R2)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
2.7pF (2R7)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
3.0pF (3R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
3.3pF (3R3)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
3.9pF (3R9)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
4.0pF (4R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
4.7pF (4R7)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
5.0pF (5R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
5.6pF (5R6)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
6.0pF (6R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
6.8pF (6R8)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
7.0pF (7R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
8.0pF (8R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
8.2pF (8R2)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
9.0pF (9R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
10pF (100)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
12pF (120)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
15pF (150)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
18pF (180)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
22pF (220)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
27pF (270)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
33pF (330)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
39pF (390)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
47pF (470)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	
56pF (560)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A	

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



Dielectric		NP0																	
Size		0201			0402				0603				0805						
Rated Voltage (V DC)		16	25	50	10	16	25	50	100	10	16	25	50	100	10	16	25	50	100
Capacitance	68pF (680)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	82pF (820)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	100pF (101)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	120pF (121)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	150pF (151)				N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	180pF (181)				N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	220pF (221)				N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	270pF (271)				N	N	N	N		S	S	S	S	S	A	A	A	A	A
	330pF (331)				N	N	N	N		S	S	S	S	S	A	A	A	A	A
	390pF (391)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	470pF (471)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	560pF (561)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	680pF (681)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	820pF (821)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	1,000pF (102)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	1,200pF (122)									X	X	X	X	X	B	B	B	B	B
	1,500pF (152)									X	X	X	X	X	B	B	B	B	B
	1,800pF (182)									X	X	X	X		B	B	B	B	B
	2,200pF (222)									X	X	X	X		B	B	B	B	B
	2,700pF (272)									X	X	X	X		D	D	D	D	D
	3,300pF (332)									X	X	X	X		D	D	D	D	D
	3,900pF (392)									X	X	X	X		D	D	D	D	D
	4,700pF (472)									X	X	X	X		D	D	D	D	D
	5,600pF (562)									X	X	X	X		D	D	D	D	D
	6,800pF (682)									X	X	X	X		D	D	D	D	D
	8,200pF (822)									X	X	X	X		D	D	D	D	
	0.010uF (103)									X	X	X	X		D	D	D	D	
	0.012uF (123)														T	T	T	T	
	0.018uF (183)														D	D	D	D	
	0.022uF (223)														D	D	D	D	

1. The letter in cell is expressed the symbol of product thickness.

### NP0 Dielectric 1206, 1210, 1812 Sizes

Dielectric		NP0												
Size		1206					1210				1812			
Rated Voltage (V DC)		10	16	25	50	100	10	16	25	50	100	16	50	100
Capacitance	1.0pF (1R0)													
	1.2pF (1R2)	B	B	B	B	B								
	1.5pF (1R5)	B	B	B	B	B								
	1.8pF (1R8)	B	B	B	B	B								
	2.2pF (2R2)	B	B	B	B	B								

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



Dielectric		NP0												
Size		1206					1210				1812			
Rated Voltage (V DC)		10	16	25	50	100	10	16	25	50	100	16	50	100
Capacitance	2.7pF (2R7)	B	B	B	B	B								
	3.3pF (3R3)	B	B	B	B	B								
	3.9pF (3R9)	B	B	B	B	B								
	4.7pF (4R7)	B	B	B	B	B								
	5.6pF (5R6)	B	B	B	B	B								
	6.8pF (6R8)	B	B	B	B	B								
	8.2pF (8R2)	B	B	B	B	B								
	10pF (100)	B	B	B	B	B	C	C	C	C	D	D	D	
	12pF (120)	B	B	B	B	B	C	C	C	C	D	D	D	
	15pF (150)	B	B	B	B	B	C	C	C	C	D	D	D	
	18pF (180)	B	B	B	B	B	C	C	C	C	D	D	D	
	22pF (220)	B	B	B	B	B	C	C	C	C	D	D	D	
	27pF (270)	B	B	B	B	B	C	C	C	C	D	D	D	
	33pF (330)	B	B	B	B	B	C	C	C	C	D	D	D	
	39pF (390)	B	B	B	B	B	C	C	C	C	D	D	D	
	47pF (470)	B	B	B	B	B	C	C	C	C	D	D	D	
	56pF (560)	B	B	B	B	B	C	C	C	C	D	D	D	
	68pF (680)	B	B	B	B	B	C	C	C	C	D	D	D	
	82pF (820)	B	B	B	B	B	C	C	C	C	D	D	D	
	100pF (101)	B	B	B	B	B	C	C	C	C	D	D	D	
	120pF (121)	B	B	B	B	B	C	C	C	C	D	D	D	
	150pF (151)	B	B	B	B	B	C	C	C	C	D	D	D	
	180pF (181)	B	B	B	B	B	C	C	C	C	D	D	D	
	220pF (221)	B	B	B	B	B	C	C	C	C	D	D	D	
	270pF (271)	B	B	B	B	B	C	C	C	C	D	D	D	
	330pF (331)	B	B	B	B	B	C	C	C	C	D	D	D	
	390pF (391)	B	B	B	B	B	C	C	C	C	D	D	D	
	470pF (471)	B	B	B	B	B	C	C	C	C	D	D	D	
	560pF (561)	B	B	B	B	B	C	C	C	C	D	D	D	
	680pF (681)	B	B	B	B	B	C	C	C	C	D	D	D	
	820pF (821)	B	B	B	B	B	C	C	C	C	D	D	D	
	1,000pF (102)	B	B	B	B	B	C	C	C	C	D	D	D	
	1,200pF (122)	B	B	B	B	B	C	C	C	C	D	D	D	
	1,500pF (152)	B	B	B	B	B	C	C	C	C	D	D	D	
	1,800pF (182)	B	B	B	B	B	C	C	C	C	D	D	D	
	2,200pF (222)	B	B	B	B	B	C	C	C	C	D	D	D	
	2,700pF (272)	B	B	B	B	B	C	C	C	C	D	D	D	
	3,300pF (332)	B	B	B	B	B	C	C	C	C	D	D	D	
	3,900pF (392)	B	B	B	B	B	C	C	C	C	D	D	D	
	4,700pF (472)	B	B	B	B	B	C	C	C	C	D	D	D	
	5,600pF (562)	B	B	B	B	B	C	C	C	C	D	D	D	
	6,800pF (682)	C	C	C	C	C	C	C	C	C	D	D	D	

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



Dielectric		NP0												
Size		1206					1210					1812		
Rated Voltage (V DC)		10	16	25	50	100	10	16	25	50	100	16	50	100
Capacitance	8,200pF (822)	D	D	D	D	D	C	C	C	C	C	D	D	D
	0.010µF (103)	D	D	D	D	D	C	C	C	C	C	D	D	D
	0.012µF (123)	T	T	T	T	T	D	D	D	D	D	D	D	D
	0.015µF (153)	T	T	T	T	T	D	D	D	D	D	D	D	D
	0.018µF (183)	T	T	T	T	T						D	D	D
	0.022µF (223)	T	T	T	T	T						D	D	D
	0.027µF (273)	T	T	T	T							D	D	D
	0.033µF (333)	T	T	T	T							D	D	D
	0.039µF (393)	J	J	J	J									
	0.047µF (473)	J	J	J	J									
	0.056µF (563)	J	J	J	J									
	0.068µF (683)	G	G	G	G									
	0.082µF (823)	G	G	G	G									
	0.1µF (104)	G	G	G	G									

1. The letter in cell is expressed the symbol of product thickness.

### X7R Dielectric 0201, 0402, 0603, 0805 Sizes

Dielectric		X7R																						
Size		0201					0402					0603					0805							
Rated Voltage (V DC)		6.3	10	16	25	50	6.3	10	16	25	50	100	6.3	10	16	25	50	100	6.3	10	16	25	50	100
Capacitance	100pF (101)		L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	120pF (121)		L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	150pF (151)		L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	180pF (181)		L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	220pF (221)		L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	270pF (271)		L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	330pF (331)		L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	390pF (391)		L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	470pF (471)		L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	560pF (561)		L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	680pF (681)		L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	820pF (821)		L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	1,000pF (102)	L	L	L	L	L	N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	1,200pF (122)	L	L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	1,500pF (152)	L	L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	1,800pF (182)	L	L	L			N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	2,200pF (222)	L	L	L			N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	2,700pF (272)	L	L	L			N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	3,300pF (332)	L	L	L			N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	3,900pF (392)	L	L	L			N	N	N	N	N		S	S	S	S	S		B	B	B	B	B	

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



Dielectric	X7R																						
Size	0201					0402					0603					0805							
Rated Voltage (V DC)	6.3	10	16	25	50	6.3	10	16	25	50	100	6.3	10	16	25	50	100	6.3	10	16	25	50	100
Capacitance	4.700pF (472)	L	L	L			N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	5.600pF (562)	L	L				N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	6.800pF (682)	L	L				N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	8.200pF (822)	L	L				N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	0.010µF (103)	L	L	L			N	N	N	N		S	S	S	S	S		B	B	B	B	B	
	0.012µF (123)						N	N	N			S	S	S	S	X		B	B	B	B	B	
	0.015µF (153)						N	N	N			S	S	S	S	X		B	B	B	B	B	
	0.018µF (183)						N	N	N			S	S	S	S	X		B	B	B	B	B	
	0.022µF (223)						N	N	N	N		S	S	S	S	X		B	B	B	B	B	
	0.027µF (273)						N	N	N			S	S	S	S	X		B	B	B	B	D	
	0.033µF (333)						N	N	N	N		S	S	S	X	X		B	B	B	B	D	
	0.039µF (393)						N	N	N			S	S	S	X	X		B	B	B	B	D	
	0.047µF (473)						N	N	N	N		S	S	S	X	X		B	B	B	B	D	
	0.056µF (563)						N	N				S	S	S	X	X		B	B	B	B	D	
	0.068µF (683)						N	N		N		S	S	S	X	X		B	B	B	B	D	
	0.082µF (823)						N	N				S	S	S	X	X		B	B	B	B	D	
	0.10µF (104)						N	N	N	N	N	S	S	S	X	X		B	B	B	B	D	
	0.12µF (124)											S	S	X				B	B	B	D		
	0.15µF (154)											S	S	X				D	D	D	D		
	0.18µF (184)											S	S	X				D	D	D	D		
	0.22µF (224)						N	N	N	N		S	S	X	X			D	D	D	D	T	
	0.27µF (274)											X	X	X	X			D	D	D	I		
	0.33µF (334)											X	X	X	X			D	D	D	I		
	0.39µF (394)											X	X	X	X			D	D	D	I		
	0.47µF (474)						N	N				X	X	X	X	X		D	D	D	I	I	
	0.56µF (564)											X	X	X				D	D	D			
	0.68µF (684)											X	X	X				D	D	D			
	0.82µF (824)											X	X	X				D	D	D			
	1.0µF (105)						N					X	X	X	X	X		D	D	D	I		
	1.5µF (155)																	I	I	I			
	2.2µF (225)											X	X					I	I	I	I	I	
	3.3µF (335)																	I	I	I	I	I	
	4.7µF (475)																	I	I	I	I	I	
	6.8µF (685)																						
	10µF (106)																	I	I	I*			
	22µF (226)																						

1. The letter in cell is expressed the symbol of product thickness.

2. The letter in cell with “\*” mark is expressed product not in 10% (code “K”) tolerance.

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



### X7R Dielectric 1206, 1210, 1812 Sizes

Dielectric		X7R																
Size		1206						1210						1812				
Rated Voltage (V DC)		6.3	10	16	25	50	100	6.3	10	16	25	50	100	10	16	25	50	100
Capacitance	100pF (101)																	
	120pF (121)																	
	150pF (151)	B	B	B	B	B												
	180pF (181)	B	B	B	B	B												
	220pF (221)	B	B	B	B	B												
	270pF (271)	B	B	B	B	B												
	330pF (331)	B	B	B	B	B												
	390pF (391)	B	B	B	B	B												
	470pF (471)	B	B	B	B	B												
	560pF (561)	B	B	B	B	B												
	680pF (681)	B	B	B	B	B												
	820pF (821)	B	B	B	B	B												
	1,000pF (102)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	1,200pF (122)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	1,500pF (152)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	1,800pF (182)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	2,200pF (222)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	2,700pF (272)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	3,300pF (332)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	3,900pF (392)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	4,700pF (472)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	5,600pF (562)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	6,800pF (682)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	8,200pF (822)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	0.010µF (103)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	0.012µF (123)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	0.015µF (153)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	0.018µF (183)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	0.022µF (223)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	0.027µF (273)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	0.033µF (333)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	0.039µF (393)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	0.047µF (473)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	0.056µF (563)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	0.068µF (683)	B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	
	0.082µF (823)	B	B	B	B	D	C	C	C	C	C	D	D	D	D	D	D	
	0.10µF (104)	B	B	B	B	D	C	C	C	C	C	D	D	D	D	D	D	
	0.12µF (124)	B	B	B	B	D	C	C	C	C	C	D	D	D	D	D	D	
	0.15µF (154)	C	C	C	C	G	C	C	C	C	D	D	D	D	D	D	D	

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



Dielectric	X7R																
Size	1206					1210					1812						
Rated Voltage (V DC)	6.3	10	16	25	50	100	6.3	10	16	25	50	100	10	16	25	50	100
Capacitance	0.18µF (184)	C	C	C	C	G		C	C	C	C	D	D	D	D	D	
	0.22µF (224)	C	C	C	C	G		C	C	C	C	D	D	D	D	D	
	0.27µF (274)	C	C	C	D	G		C	C	C	C	G	D	D	D	D	
	0.33µF (334)	C	C	C	D	G		C	C	C	D	G	D	D	D	D	
	0.39µF (394)	C	C	J	P	G		C	C	C	D	M	D	D	D	D	
	0.47µF (474)	J	J	J	P	G		C	C	C	D	M	D	D	D	K	
	0.56µF (564)	J	J	J	P	P		D	D	D	D	M	D	D	D	K	
	0.68µF (684)	J	J	J	P	P		D	D	D	D	K	D	D	D	K	
	0.82µF (824)	J	J	J	P	P		D	D	D	D	K	D	D	D	K	
	1.0µF (105)	J	J	J	P	P		D	D	D	D	K	D	D	D	K	
	1.5µF (155)	J	J	J	P			K	G	M	M					K	
	2.2µF (225)	J	J	J	P	P		K	G	M	M					M	
	3.3µF (335)	P	P	P				K	G								
	4.7µF (475)	P	P	P	P	P		K	K	K	M						
	6.8µF (685)																
	10µF (106)	P	P	P	P			K	K	K	M						
	22µF (226)	P	P	P*				M	M	M							
	47µF (476)						M	M									
	100µF (107)																

1. The letter in cell is expressed the symbol of product thickness.

2. The letter in cell with “ \* ” mark is expressed product not in 10% (code “K”) tolerance.

### Y5V Dielectric 0402, 0603, 0805 Sizes

Dielectric	Y5V															
Size	0402					0603					0805					
Rated Voltage (V DC)	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	100
Capacitance	0.010µF (103)	N	N	N	N		S	S	S	S		A	A	A	A	B
	0.015µF (153)	N	N	N	N		S	S	S	S		A	A	A	A	B
	0.022µF (223)	N	N	N	N		S	S	S	S		A	A	A	A	B
	0.033µF (333)	N	N	N	N		S	S	S	S		A	A	A	A	B
	0.047µF (473)	N	N	N			S	S	S	S		A	A	A	A	B
	0.068µF (683)	N	N	N			S	S	S	S		A	A	A	A	B
	0.10µF (104)	N	N	N			S	S	S	S		A	A	A	A	B
	0.15µF (154)	N	N				S	S	S	S		A	A	A	A	
	0.22µF (224)	N	N	N			S	S	S	S		A	A	A	A	
	0.33µF (334)	N	N	N			S	S	S	X		B	B	B	B	
	0.47µF (474)	N	N	N			S	S	X	X		B	B	B	B	
	0.68µF (684)	N					S	X	X			B	B	D	D	
	1.0µF (105)	N	N				S	X	X			B	B	D	D	
	1.5µF (155)						S					D	D			

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



Dielectric		Y5V															
Size		0402					0603					0805					
Rated Voltage (V DC)		6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	100
Capacitance	2.2μF (225)						S	S	X			D	D	I			
	3.3μF (335)											D	D				
	4.7μF (475)						X	X				D	D	I			
	6.8μF (685)											I					
	10μF (106)										I	I	I				
	22μF (226)										I	I					

1. The letter in cell is expressed the symbol of product thickness.

### Y5V Dielectric 1206, 1210, 1812 Sizes

Dielectric		Y5V																
Size		1206						1210					1812					
Rated Voltage (V DC)		6.3	10	16	25	50	100	6.3	10	16	25	50	100	10	16	25	50	100
Capacitance	0.010μF (103)		B	B	B	B	B						C				D	
	0.015μF (153)		B	B	B	B	B						C				D	
	0.022μF (223)		B	B	B	B	B						C				D	
	0.033μF (333)		B	B	B	B	B						C				D	
	0.047μF (473)		B	B	B	B	B						C				D	
	0.068μF (683)		B	B	B	B	B						C				D	
	0.10μF (104)		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	
	0.15μF (154)		B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	
	0.22μF (224)		B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	
	0.33μF (334)		B	B	B	B		C	C	C	C	C	D	D	D	D	D	
	0.47μF (474)		B	B	B	B		C	C	C	C		D	D	D	D	D	
	0.68μF (684)		B	B	B	B		C	C	C	C		D	D	D	D	D	
	1.0μF (105)		C	C	C	C		C	C	C	C		D	D	D	D	D	
	1.5μF (155)		C	C	C			C	C	C			D	D	D	D	D	
	2.2μF (225)		C	C	C	J		C	C	C	G		D	D	D	D	D	
	3.3μF (335)		J	J	J			C	C	C			D	D	D	D	D	
	4.7μF (475)		J	J	J	P		C	C	D	G		D	D	D	D	D	
	6.8μF (685)		J	J				C	C	D			D	D	D	D	D	
	10μF (106)		J	J	P			D	D	G			D	D	D	D	K	
	22μF (226)		P	P				K	K				M					
	47μF (476)	P						K	K				M					
	100μF (107)							M										

1. The letter in cell is expressed the symbol of product thickness.

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



X5R Dielectric 0201, 0402, 0603, 0805, 1206, 1210 Sizes

Dielectric		X5R														
Size		0201					0402					0603				
Rated Voltage (V DC)		6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
Capacitance	100pF (101)			L	L	L										
	120pF (121)			L	L	L										
	150pF (151)			L	L	L										
	180pF (181)			L	L	L										
	220pF (221)			L	L	L										
	270pF (271)			L	L	L										
	330pF (331)			L	L	L										
	390pF (391)			L	L	L										
	470pF (471)			L	L	L										
	560pF (561)			L	L	L										
	680pF (681)			L	L	L										
	820pF (821)			L	L	L										
	1,000pF (102)		L	L	L	L										
	1,500pF (152)		L	L												
	2,200pF (222)		L	L												
	2,700pF (272)		L	L												
	3,300pF (332)		L	L												
	4,700pF (472)		L	L												
	6,800pF (682)		L													
	0.010µF (103)	L	L	L	L											
	0.015µF (153)	L	L													
	0.022µF (223)	L	L													
	0.027µF (273)	L	L				N									
	0.033µF (333)	L	L				N									
	0.039µF (393)	L	L				N									
	0.047µF (473)	L	L				N									
	0.056µF (563)	L	L				N	N								
	0.068µF (683)	L	L				N	N								
	0.082µF (823)	L	L			N	N	N								
	0.10µF (104)	L	L	L	L	N	N	N	N	N						
	0.15µF (154)					N	N	N	N	N						
	0.22µF (224)	L	L			N	N	N	N	N		X	X			
	0.27uF (274)											X	X	X		
	0.33µF (334)					N	N				X	X	X	X		
	0.39µF (394)										X	X	X			
	0.47µF (474)	L				N	N	E	E	E	X	X	X	X	X	
	0.68µF (684)					N	N				X	X	X	X		
	0.82uF (824)										X	X	X			
	1.0µF (105)	L	L*			N	N	N	N		X	X	X		X	
	1.5µF (155)										X					
	2.2µF (225)	L*				N	N	E*	E		X	X	X	X	X	
	3.3µF (335)										X	X				

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



Dielectric		X5R														
Size		0201					0402					0603				
Rated Voltage (V DC)		6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
Capacitance	4.7μF (475)						E*	E*				X	X	X	X	
	6.8μF (685)															
	10μF (106)						E*	E*				X	X	X	X*	
	22μF (226)											X*	X*			
	47μF (476)															
	100μF (107)															
	220μF (227)											M*				
	470μF (477)															
	1000μF (108)															
	2200μF (228)															

Dielectric		X5R																
Size		1206							1210					1812				
Rated Voltage (V DC)		4	6.3	10	16	25	50	6.3	10	16	25	50	4	6.3	10	16	25	50
Capacitance	1.0μF (105)			D	D	D	I											
	1.5μF (155)		I	I	I	I			J	J			K	K				
	2.2μF (225)	I	I	I	I	I		J	J	P	P		K	K				
	3.3μF (335)	I	I	I	I			P	P	P								
	4.7μF (475)	I	I	I	I	I	P	P	P	P	P		K	K	K			
	6.8μF (685)						P	P										
	10μF (106)	I	I	I	I	I	P	P	P	P	P		K	K	K	K	M	
	22μF (226)	I*	I*	I*			P	P	P	P			M	M	M	M		
	47μF (476)	I*	I*				P	P					M	M	M			
	100μF (107)	I*					P*						M*	M*				
	220μF (227)											M*						

1. The letter in cell is expressed the symbol of product thickness.

2. The letter in cell with “\*” mark is expressed product not in 10% (code “K”) tolerance.

### X6S Dielectric 0201, 0402, 0603, 0805, 1206, 1210 Sizes

Dielectric		X6S																		1206				1210				
Size		0201				0402				0603				0805				1206				1210						
Rated Voltage (V DC)		4	6.3	6.3	10	16	25	4	6.3	10	16	25	4	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
Capacitance	0.10μF (104)	L	L																									
	0.15μF (154)																											
	0.22μF (224)		L																									
	0.33μF (334)																											
	0.47μF (474)			N																								
	0.68μF (684)																											
	1.0μF (105)	L*		N	E	E	E																					
	1.5μF (155)																											
	2.2μF (225)			N	E	E																						
	3.3μF (335)																											
	4.7μF (475)																											
	6.8μF (685)																											
	10μF (106)																											
	22μF (226)																											
	47μF (476)																											
	100μF (107)																											

1. The letter in cell is expressed the symbol of product thickness.

2. The letter in cell with “\*” mark is expressed product not in 10% (code “K”) tolerance.

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



### Packaging Dimension And Quantity:

Size	Thickness (mm)/Symbol	Paper tape		Plastic tape	
		7" reel	13" reel	7" reel	13" reel
0201 (0603)	0.3 ±0.03	L	15,000	70,000	-
	0.3 ± 0.05	L	15,000	-	-
	0.3 ±0.09	L	15,000	-	-
0402 (1005)	0.5 ±0.05	N	10,000	50,000	-
	0.5 +0.02/-0.05	Q	10,000	50,000	-
	0.5 ±0.2	E	10,000	-	-
0603 (1608)	0.5 ±0.1	H	4,000	-	-
	0.8 ±0.07	S	4,000	15,000	-
	0.8 +0.15/-0.1	X	4,000	15,000	-
0805 (2012)	0.5 ±0.1	H	4,000	15,000	-
	0.6 ±0.1	A	4,000	15,000	-
	0.8 ±0.1	B	4,000	15,000	-
	0.85 ±0.1	T	4,000	15,000	-
	1.25 ±0.1	D	-	-	3,000
	1.25 ±0.2	I	-	-	3,000
1206 (3216)	0.8 ±0.1	B	4,000	15,000	-
	0.85 ±0.1	T	4,000	15,000	-
	0.95 ±0.1	C	-	-	3,000
	1.15 ±0.15	J	-	-	3,000
	1.25 ±0.1	D	-	-	3,000
	1.6 ±0.2	G	-	-	2,000
	1.6 +0.30/-0.10	P	-	-	2,000
1210 (3225)	0.85 ±0.1	T	-	-	3,000
	0.95 ±0.1	C	-	-	3,000
	1.25 ±0.1	D	-	-	3,000
	1.6 ±0.2	G	-	-	2,000
	2 ±0.2	K	-	-	1,000
	2.5 ±0.3	M	-	-	1,000
1808 (4520)	1.25 ±0.1	D	-	-	2,000
	1.1 ±0.15	F	-	-	2,000
	1.6 ±0.2	G	-	-	2,000
	2 ±0.2	K	-	-	1,000
1812 (4532)	1.25 ±0.1	D	-	-	1,000
	1.6 ±0.2	G	-	-	1,000
	2 ±0.2	K	-	-	1,000
	2.5 ±0.3	M	-	-	500
	2.8 ±0.3	U	-	-	500

Unit : pieces

### Reliability Test Conditions And Requirements:

No	Item	Test Condition	Requirements
1	Visual and Mechanical	-	No remarkable defect. Dimensions to conform to individual specification sheet.

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



No	Item	Test Condition	Requirements																																																										
2	Capacitance		*Shall not exceed the limits given in the detailed spec.																																																										
			NP0: Cap $\geq$ 30pF, Q $\geq$ 1000; Cap<30pF, Q $\geq$ 400+20C X7R,X5R,X6S:																																																										
			<table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.<math>\leq</math></th> <th colspan="2">Exception of D.F. <math>\leq</math></th> </tr> </thead> <tbody> <tr> <td rowspan="2"><math>\geq</math>100V</td> <td rowspan="2"><math>\leq</math>2.5%</td> <td><math>\leq</math>3%</td> <td>1206<math>\geq</math>0.47<math>\mu</math>F</td> </tr> <tr> <td><math>\leq</math>5%</td> <td>0805<math>&gt;</math>0.1<math>\mu</math>F, 0603<math>\geq</math>0.068<math>\mu</math>F, 1206<math>&gt;</math>1<math>\mu</math>F; TT series</td> </tr> <tr> <td rowspan="3"><math>\geq</math>50V</td> <td rowspan="3"><math>\leq</math>2.5%</td> <td><math>\leq</math>3%</td> <td>0201(50V); 0603<math>\geq</math>0.047<math>\mu</math>F; 0805<math>\geq</math>0.18<math>\mu</math>F; 1206<math>\geq</math>0.47<math>\mu</math>F</td> </tr> <tr> <td><math>\leq</math>5%</td> <td>1210<math>\geq</math>4.7<math>\mu</math>F</td> </tr> <tr> <td><math>\leq</math>10%</td> <td>0402<math>\geq</math>0.1<math>\mu</math>F; 0603<math>\geq</math>1<math>\mu</math>F; 0805<math>\geq</math>1<math>\mu</math>F; 1206<math>\geq</math>4.7<math>\mu</math>F; 1210<math>\geq</math>10<math>\mu</math>F TT series</td> </tr> <tr> <td>35V</td> <td><math>\leq</math>3.5%</td> <td><math>\leq</math>10%</td> <td>0603<math>\geq</math>1<math>\mu</math>F; 0805<math>\geq</math>2.2<math>\mu</math>F; 1210<math>\geq</math>10<math>\mu</math>F</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4"><math>\leq</math>3.5%</td> <td><math>\leq</math>5%</td> <td>0201<math>\geq</math>0.01<math>\mu</math>F; 0805<math>\geq</math>1<math>\mu</math>F; 1210<math>\geq</math>10<math>\mu</math>F</td> </tr> <tr> <td><math>\leq</math>7%</td> <td>0603<math>\geq</math>0.33<math>\mu</math>F; 1206<math>\geq</math>4.7<math>\mu</math>F</td> </tr> <tr> <td><math>\leq</math>10%</td> <td>0402<math>\geq</math>0.10<math>\mu</math>F; 0603<math>\geq</math>0.47<math>\mu</math>F; 0805<math>\geq</math>2.2<math>\mu</math>F; 1206<math>\geq</math>6.8<math>\mu</math>F; 1210<math>\geq</math>22<math>\mu</math>F; TT series</td> </tr> <tr> <td><math>\leq</math>12.5%</td> <td>0402<math>\geq</math>1<math>\mu</math>F</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2"><math>\leq</math>3.5%</td> <td><math>\leq</math>5%</td> <td>0201<math>\geq</math>0.01<math>\mu</math>F; 0402<math>\geq</math>0.033<math>\mu</math>F; 0805<math>\geq</math>0.68<math>\mu</math>F; 1206<math>\geq</math>2.2<math>\mu</math>F; 1210<math>\geq</math>4.7<math>\mu</math>F</td> </tr> <tr> <td><math>\leq</math>10%</td> <td>0201<math>\geq</math>0.1<math>\mu</math>F; 0402<math>\geq</math>0.47<math>\mu</math>F; 0603<math>\geq</math>0.68<math>\mu</math>F; 0805<math>\geq</math>2.2<math>\mu</math>F; 1206<math>\geq</math>4.7<math>\mu</math>F; 1210<math>\geq</math>22<math>\mu</math>F; TT series</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2"><math>\leq</math>5%</td> <td><math>\leq</math>10%</td> <td>0201<math>\geq</math>0.012<math>\mu</math>F; 0402<math>\geq</math>0.33<math>\mu</math>F(0402/ X7R<math>\geq</math>0.22<math>\mu</math>F); TT series 0603<math>\geq</math>0.33<math>\mu</math>F; 0805<math>\geq</math>2.2<math>\mu</math>F; 1206<math>\geq</math>2.2<math>\mu</math>F; 1210<math>\geq</math>22<math>\mu</math>F</td> </tr> <tr> <td><math>\leq</math>15%</td> <td>0201<math>\geq</math>0.1<math>\mu</math>F; 0402<math>\geq</math>1<math>\mu</math>F</td> </tr> <tr> <td rowspan="2">6.3V</td> <td rowspan="2"><math>\leq</math>10%</td> <td><math>\leq</math>15%</td> <td>0201<math>\geq</math>0.1<math>\mu</math>F; 0402<math>\geq</math>1<math>\mu</math>F; 0603<math>\geq</math>10<math>\mu</math>F; 0805<math>\geq</math>4.7<math>\mu</math>F; 1206<math>\geq</math>47<math>\mu</math>F; 1210<math>\geq</math>100<math>\mu</math>F; TT series</td> </tr> <tr> <td><math>\leq</math>20%</td> <td>0402<math>\geq</math>2.2<math>\mu</math>F</td> </tr> <tr> <td>4V</td> <td><math>\leq</math>15%</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$		$\geq$ 100V	$\leq$ 2.5%	$\leq$ 3%	1206 $\geq$ 0.47 $\mu$ F	$\leq$ 5%	0805 $>$ 0.1 $\mu$ F, 0603 $\geq$ 0.068 $\mu$ F, 1206 $>$ 1 $\mu$ F; TT series	$\geq$ 50V	$\leq$ 2.5%	$\leq$ 3%	0201(50V); 0603 $\geq$ 0.047 $\mu$ F; 0805 $\geq$ 0.18 $\mu$ F; 1206 $\geq$ 0.47 $\mu$ F	$\leq$ 5%	1210 $\geq$ 4.7 $\mu$ F	$\leq$ 10%	0402 $\geq$ 0.1 $\mu$ F; 0603 $\geq$ 1 $\mu$ F; 0805 $\geq$ 1 $\mu$ F; 1206 $\geq$ 4.7 $\mu$ F; 1210 $\geq$ 10 $\mu$ F TT series	35V	$\leq$ 3.5%	$\leq$ 10%	0603 $\geq$ 1 $\mu$ F; 0805 $\geq$ 2.2 $\mu$ F; 1210 $\geq$ 10 $\mu$ F	25V	$\leq$ 3.5%	$\leq$ 5%	0201 $\geq$ 0.01 $\mu$ F; 0805 $\geq$ 1 $\mu$ F; 1210 $\geq$ 10 $\mu$ F	$\leq$ 7%	0603 $\geq$ 0.33 $\mu$ F; 1206 $\geq$ 4.7 $\mu$ F	$\leq$ 10%	0402 $\geq$ 0.10 $\mu$ F; 0603 $\geq$ 0.47 $\mu$ F; 0805 $\geq$ 2.2 $\mu$ F; 1206 $\geq$ 6.8 $\mu$ F; 1210 $\geq$ 22 $\mu$ F; TT series	$\leq$ 12.5%	0402 $\geq$ 1 $\mu$ F	16V	$\leq$ 3.5%	$\leq$ 5%	0201 $\geq$ 0.01 $\mu$ F; 0402 $\geq$ 0.033 $\mu$ F; 0805 $\geq$ 0.68 $\mu$ F; 1206 $\geq$ 2.2 $\mu$ F; 1210 $\geq$ 4.7 $\mu$ F	$\leq$ 10%	0201 $\geq$ 0.1 $\mu$ F; 0402 $\geq$ 0.47 $\mu$ F; 0603 $\geq$ 0.68 $\mu$ F; 0805 $\geq$ 2.2 $\mu$ F; 1206 $\geq$ 4.7 $\mu$ F; 1210 $\geq$ 22 $\mu$ F; TT series	10V	$\leq$ 5%	$\leq$ 10%	0201 $\geq$ 0.012 $\mu$ F; 0402 $\geq$ 0.33 $\mu$ F(0402/ X7R $\geq$ 0.22 $\mu$ F); TT series 0603 $\geq$ 0.33 $\mu$ F; 0805 $\geq$ 2.2 $\mu$ F; 1206 $\geq$ 2.2 $\mu$ F; 1210 $\geq$ 22 $\mu$ F	$\leq$ 15%	0201 $\geq$ 0.1 $\mu$ F; 0402 $\geq$ 1 $\mu$ F	6.3V	$\leq$ 10%	$\leq$ 15%	0201 $\geq$ 0.1 $\mu$ F; 0402 $\geq$ 1 $\mu$ F; 0603 $\geq$ 10 $\mu$ F; 0805 $\geq$ 4.7 $\mu$ F; 1206 $\geq$ 47 $\mu$ F; 1210 $\geq$ 100 $\mu$ F; TT series	$\leq$ 20%	0402 $\geq$ 2.2 $\mu$ F	4V	$\leq$ 15%	-	-	Y5V:			
Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$																																																											
$\geq$ 100V	$\leq$ 2.5%	$\leq$ 3%	1206 $\geq$ 0.47 $\mu$ F																																																										
		$\leq$ 5%	0805 $>$ 0.1 $\mu$ F, 0603 $\geq$ 0.068 $\mu$ F, 1206 $>$ 1 $\mu$ F; TT series																																																										
$\geq$ 50V	$\leq$ 2.5%	$\leq$ 3%	0201(50V); 0603 $\geq$ 0.047 $\mu$ F; 0805 $\geq$ 0.18 $\mu$ F; 1206 $\geq$ 0.47 $\mu$ F																																																										
		$\leq$ 5%	1210 $\geq$ 4.7 $\mu$ F																																																										
		$\leq$ 10%	0402 $\geq$ 0.1 $\mu$ F; 0603 $\geq$ 1 $\mu$ F; 0805 $\geq$ 1 $\mu$ F; 1206 $\geq$ 4.7 $\mu$ F; 1210 $\geq$ 10 $\mu$ F TT series																																																										
35V	$\leq$ 3.5%	$\leq$ 10%	0603 $\geq$ 1 $\mu$ F; 0805 $\geq$ 2.2 $\mu$ F; 1210 $\geq$ 10 $\mu$ F																																																										
25V	$\leq$ 3.5%	$\leq$ 5%	0201 $\geq$ 0.01 $\mu$ F; 0805 $\geq$ 1 $\mu$ F; 1210 $\geq$ 10 $\mu$ F																																																										
		$\leq$ 7%	0603 $\geq$ 0.33 $\mu$ F; 1206 $\geq$ 4.7 $\mu$ F																																																										
		$\leq$ 10%	0402 $\geq$ 0.10 $\mu$ F; 0603 $\geq$ 0.47 $\mu$ F; 0805 $\geq$ 2.2 $\mu$ F; 1206 $\geq$ 6.8 $\mu$ F; 1210 $\geq$ 22 $\mu$ F; TT series																																																										
		$\leq$ 12.5%	0402 $\geq$ 1 $\mu$ F																																																										
16V	$\leq$ 3.5%	$\leq$ 5%	0201 $\geq$ 0.01 $\mu$ F; 0402 $\geq$ 0.033 $\mu$ F; 0805 $\geq$ 0.68 $\mu$ F; 1206 $\geq$ 2.2 $\mu$ F; 1210 $\geq$ 4.7 $\mu$ F																																																										
		$\leq$ 10%	0201 $\geq$ 0.1 $\mu$ F; 0402 $\geq$ 0.47 $\mu$ F; 0603 $\geq$ 0.68 $\mu$ F; 0805 $\geq$ 2.2 $\mu$ F; 1206 $\geq$ 4.7 $\mu$ F; 1210 $\geq$ 22 $\mu$ F; TT series																																																										
10V	$\leq$ 5%	$\leq$ 10%	0201 $\geq$ 0.012 $\mu$ F; 0402 $\geq$ 0.33 $\mu$ F(0402/ X7R $\geq$ 0.22 $\mu$ F); TT series 0603 $\geq$ 0.33 $\mu$ F; 0805 $\geq$ 2.2 $\mu$ F; 1206 $\geq$ 2.2 $\mu$ F; 1210 $\geq$ 22 $\mu$ F																																																										
		$\leq$ 15%	0201 $\geq$ 0.1 $\mu$ F; 0402 $\geq$ 1 $\mu$ F																																																										
6.3V	$\leq$ 10%	$\leq$ 15%	0201 $\geq$ 0.1 $\mu$ F; 0402 $\geq$ 1 $\mu$ F; 0603 $\geq$ 10 $\mu$ F; 0805 $\geq$ 4.7 $\mu$ F; 1206 $\geq$ 47 $\mu$ F; 1210 $\geq$ 100 $\mu$ F; TT series																																																										
		$\leq$ 20%	0402 $\geq$ 2.2 $\mu$ F																																																										
4V	$\leq$ 15%	-	-																																																										
			<table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.<math>\leq</math></th> <th colspan="2">Exception of D.F. <math>\leq</math></th> </tr> </thead> <tbody> <tr> <td><math>\geq</math>50V</td> <td>5%</td> <td>7%</td> <td>0603<math>\geq</math>0.1<math>\mu</math>F; 0805<math>\geq</math>0.47<math>\mu</math>F; 1206<math>\geq</math>4.7<math>\mu</math>F</td> </tr> <tr> <td>35V</td> <td>7%</td> <td>-</td> <td>-</td> </tr> <tr> <td rowspan="2">25V</td> <td rowspan="2">5%</td> <td>7%</td> <td>0402<math>\geq</math>0.047<math>\mu</math>F; 0603<math>\geq</math>0.1<math>\mu</math>F; 0805<math>\geq</math>0.33<math>\mu</math>F; 1206<math>\geq</math>1<math>\mu</math>F; 1210<math>\geq</math>4.7<math>\mu</math>F</td> </tr> <tr> <td>9%</td> <td>0402<math>\geq</math>0.068<math>\mu</math>F; 0603<math>\geq</math>0.47<math>\mu</math>F; 1206<math>\geq</math>4.7<math>\mu</math>F; 1210<math>\geq</math>22<math>\mu</math>F</td> </tr> <tr> <td rowspan="2">16V (C<math>&lt;</math>1<math>\mu</math>F)</td> <td rowspan="2">7%</td> <td>9%</td> <td>0402<math>\geq</math>0.068<math>\mu</math>F; 0603<math>\geq</math>0.68<math>\mu</math>F</td> </tr> <tr> <td>12.5%</td> <td>0402<math>\geq</math>0.22<math>\mu</math>F</td> </tr> <tr> <td>16V (C<math>\geq</math>1.0<math>\mu</math>F)</td> <td>9%</td> <td>12.5%</td> <td>0603<math>\geq</math>2.2<math>\mu</math>F; 0805<math>\geq</math>3.3<math>\mu</math>F; 1206<math>\geq</math>10<math>\mu</math>F; 1210<math>\geq</math>22<math>\mu</math>F; 1812<math>\geq</math>47<math>\mu</math>F</td> </tr> <tr> <td>10V</td> <td>12.5%</td> <td>20%</td> <td>0402<math>\geq</math>0.47<math>\mu</math>F</td> </tr> <tr> <td>6.3V</td> <td>20%</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$		$\geq$ 50V	5%	7%	0603 $\geq$ 0.1 $\mu$ F; 0805 $\geq$ 0.47 $\mu$ F; 1206 $\geq$ 4.7 $\mu$ F	35V	7%	-	-	25V	5%	7%	0402 $\geq$ 0.047 $\mu$ F; 0603 $\geq$ 0.1 $\mu$ F; 0805 $\geq$ 0.33 $\mu$ F; 1206 $\geq$ 1 $\mu$ F; 1210 $\geq$ 4.7 $\mu$ F	9%	0402 $\geq$ 0.068 $\mu$ F; 0603 $\geq$ 0.47 $\mu$ F; 1206 $\geq$ 4.7 $\mu$ F; 1210 $\geq$ 22 $\mu$ F	16V (C $<$ 1 $\mu$ F)	7%	9%	0402 $\geq$ 0.068 $\mu$ F; 0603 $\geq$ 0.68 $\mu$ F	12.5%	0402 $\geq$ 0.22 $\mu$ F	16V (C $\geq$ 1.0 $\mu$ F)	9%	12.5%	0603 $\geq$ 2.2 $\mu$ F; 0805 $\geq$ 3.3 $\mu$ F; 1206 $\geq$ 10 $\mu$ F; 1210 $\geq$ 22 $\mu$ F; 1812 $\geq$ 47 $\mu$ F	10V	12.5%	20%	0402 $\geq$ 0.47 $\mu$ F	6.3V	20%	-	-																						
Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$																																																											
$\geq$ 50V	5%	7%	0603 $\geq$ 0.1 $\mu$ F; 0805 $\geq$ 0.47 $\mu$ F; 1206 $\geq$ 4.7 $\mu$ F																																																										
35V	7%	-	-																																																										
25V	5%	7%	0402 $\geq$ 0.047 $\mu$ F; 0603 $\geq$ 0.1 $\mu$ F; 0805 $\geq$ 0.33 $\mu$ F; 1206 $\geq$ 1 $\mu$ F; 1210 $\geq$ 4.7 $\mu$ F																																																										
		9%	0402 $\geq$ 0.068 $\mu$ F; 0603 $\geq$ 0.47 $\mu$ F; 1206 $\geq$ 4.7 $\mu$ F; 1210 $\geq$ 22 $\mu$ F																																																										
16V (C $<$ 1 $\mu$ F)	7%	9%	0402 $\geq$ 0.068 $\mu$ F; 0603 $\geq$ 0.68 $\mu$ F																																																										
		12.5%	0402 $\geq$ 0.22 $\mu$ F																																																										
16V (C $\geq$ 1.0 $\mu$ F)	9%	12.5%	0603 $\geq$ 2.2 $\mu$ F; 0805 $\geq$ 3.3 $\mu$ F; 1206 $\geq$ 10 $\mu$ F; 1210 $\geq$ 22 $\mu$ F; 1812 $\geq$ 47 $\mu$ F																																																										
10V	12.5%	20%	0402 $\geq$ 0.47 $\mu$ F																																																										
6.3V	20%	-	-																																																										

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



No	Item	Test Condition	Requirements																								
4	Dielectric Strength	To apply voltage ( $\leq 100V$ ) 250%. Duration: 1 to 5 sec. Charge and discharge current less than 50mA.	No evidence of damage or flash over during test.																								
5	Insulation Resistance	To apply rated voltage for max. 120 sec.	<p>10GΩ or <math>RxC \geq 500\Omega\cdot F</math> whichever is smaller. Class II (X7R, X5R, X6S, Y5V)</p> <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr><td>100V: X7R</td><td rowspan="10">10G or <math>RxC \geq 100\Omega\cdot F</math> whichever is smaller.</td></tr> <tr><td>50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr> <tr><td>35V: 0805≥2.2μF; 1210≥10μF</td></tr> <tr><td>25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr> <tr><td>16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr> <tr><td>10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr> <tr><td>6.3V ; 4V</td></tr> <tr><td>All X6S items</td></tr> <tr><td>50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF</td></tr> <tr><td>35V: 0603≥1μF;</td></tr> <tr><td>25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥10μF; 1206≥22μF</td></tr> <tr><td>16V: 0603≥10μF</td></tr> <tr><td>10V: 0201≥0.1μF; 0603≥10μF; 0805≥47μF</td></tr> <tr><td>6.3V: 0201≥0.1μF; 1206≥10μF</td></tr> <tr><td>4V: 0603≥22μF; 0805≥47μF</td></tr> </tbody> </table> <p><math>RxC \geq 50 \Omega\cdot F</math>.</p>	Rated voltage	Insulation Resistance	100V: X7R	10G or $RxC \geq 100\Omega\cdot F$ whichever is smaller.	50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1210≥10μF	25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V ; 4V	All X6S items	50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF	35V: 0603≥1μF;	25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥10μF; 1206≥22μF	16V: 0603≥10μF	10V: 0201≥0.1μF; 0603≥10μF; 0805≥47μF	6.3V: 0201≥0.1μF; 1206≥10μF	4V: 0603≥22μF; 0805≥47μF						
Rated voltage	Insulation Resistance																										
100V: X7R	10G or $RxC \geq 100\Omega\cdot F$ whichever is smaller.																										
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																											
35V: 0805≥2.2μF; 1210≥10μF																											
25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																											
16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																											
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																											
6.3V ; 4V																											
All X6S items																											
50V: 0402≥0.1μF; 0603≥2.2μF; 0805≥10μF; 1206≥10μF																											
35V: 0603≥1μF;																											
25V: 0201≥0.1μF; 0402≥0.22μF; 0603≥10μF; 1206≥22μF																											
16V: 0603≥10μF																											
10V: 0201≥0.1μF; 0603≥10μF; 0805≥47μF																											
6.3V: 0201≥0.1μF; 1206≥10μF																											
4V: 0603≥22μF; 0805≥47μF																											
6	Temperature Coefficient	With no electrical load.	<table border="1"> <thead> <tr> <th>T.C.</th> <th>Operating Temp</th> </tr> </thead> <tbody> <tr><td>NPO</td><td>-55~125°C at 25°C</td></tr> <tr><td>X7R</td><td>-55~125°C at 25°C</td></tr> <tr><td>X5R</td><td>-55~ 85°C at 25°C</td></tr> <tr><td>X6S</td><td>-55~105°C at 25°C</td></tr> <tr><td>Y5V</td><td>-25~ 85°C at 20°C</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>T.C.</th> <th>Capacitance Change</th> </tr> </thead> <tbody> <tr><td>NPO</td><td>Within ±30ppm/°C</td></tr> <tr><td>X7R</td><td>Within ±15%</td></tr> <tr><td>X5R</td><td>Within ±15%</td></tr> <tr><td>X6S</td><td>Within ±22%</td></tr> <tr><td>Y5V</td><td>Within +30%/-80%</td></tr> </tbody> </table>	T.C.	Operating Temp	NPO	-55~125°C at 25°C	X7R	-55~125°C at 25°C	X5R	-55~ 85°C at 25°C	X6S	-55~105°C at 25°C	Y5V	-25~ 85°C at 20°C	T.C.	Capacitance Change	NPO	Within ±30ppm/°C	X7R	Within ±15%	X5R	Within ±15%	X6S	Within ±22%	Y5V	Within +30%/-80%
T.C.	Operating Temp																										
NPO	-55~125°C at 25°C																										
X7R	-55~125°C at 25°C																										
X5R	-55~ 85°C at 25°C																										
X6S	-55~105°C at 25°C																										
Y5V	-25~ 85°C at 20°C																										
T.C.	Capacitance Change																										
NPO	Within ±30ppm/°C																										
X7R	Within ±15%																										
X5R	Within ±15%																										
X6S	Within ±22%																										
Y5V	Within +30%/-80%																										
7	Adhesive Strength of Termination	Pressurizing force: 1N (0201) and 5N ( $\leq 0603$ ) and 10N ( $> 0603$ ) * Test time: $10 \pm 1$ sec.	No remarkable damage or removal of the terminations.																								
8	Vibration Resistance	Vibration frequency: 10~55 Hz/min. Total amplitude: 1.5mm Test time: 6 hrs. (Two hrs each in three mutually perpendicular directions.) Measurement to be made after keeping at room temp. for $24 \pm 2$ hrs.	No remarkable damage. Cap change and Q/D.F.: To meet initial spec.																								

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



No	Item	Test Condition	Requirements															
9	Solderability	Solder temperature: 235±5°C Dipping time: 2±0.5 sec.	95% min. coverage of all metallized area.															
10.	Bending Test	The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 1 mm and then the pressure shall be maintained for 5±1 sec. Measurement to be made after keeping at room temp. for 24±2 hrs.	No remarkable damage. Cap change: NP0: within ±5% or 0.5pF whichever is larger X7R, X5R, X6S: within ±12.5% Y5V: within ±30% (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.)															
11	Resistance to Soldering Heat	Solder temperature: 260±5°C Dipping time: 10±1 sec Preheating: 120 to 150°C for 1 minute before immerse the capacitor in a eutectic solder. Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp. Measurement to be made after keeping at room temp. for 24±2 hrs.	No remarkable damage. Cap change: NP0: within ±2.5% or 0.25pF whichever is larger X7R, X5R, X6S: within ±7.5% Y5V: within ±20% Q/D.F., I.R. and dielectric strength: To meet initial requirements. 25% max. leaching on each edge.															
12	Temperature Cycle	Conduct the five cycles according to the temperatures and time.  <table border="1"> <thead> <tr> <th>Step</th> <th>Temp. (°C)</th> <th>Time (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Min. operating temp. +0/-3</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>Room temp.</td> <td>2~3</td> </tr> <tr> <td>3</td> <td>Max. operating temp. +3/-0</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>Room temp.</td> <td>2~3</td> </tr> </tbody> </table> Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp. Measurement to be made after keeping at room temp. for 24±2 hrs.	Step	Temp. (°C)	Time (min.)	1	Min. operating temp. +0/-3	30±3	2	Room temp.	2~3	3	Max. operating temp. +3/-0	30±3	4	Room temp.	2~3	No remarkable damage. Cap change: NP0: within ±2.5% or 0.25pF whichever is larger X7R, X5R, X6S: within ±7.5% Y5V: within ±20% Q/D.F., I.R. and dielectric strength: To meet initial requirements.
Step	Temp. (°C)	Time (min.)																
1	Min. operating temp. +0/-3	30±3																
2	Room temp.	2~3																
3	Max. operating temp. +3/-0	30±3																
4	Room temp.	2~3																

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



No	Item	Test Condition	Requirements				
13	Humidity (Damp Heat) Steady State	Test temp.: 40±2°C Humidity: 90~95% RH Test time: 500+24/-0hrs. Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp. Measurement to be made after keeping at room temp. for 24±2 hrs.		No remarkable damage. Cap change: NP0: within ±5% or 0.5pF whichever is larger X7R, X5R, X6S: $\geq 10V^{**}$ , within ±12.5%; $\leq 6.3V$ within ±25%; TT series & $C \geq 1\mu F$ , within ±25% $**10V: 0603 \geq 4.7\mu F; 0402 \geq 1\mu F; 0201 \geq 0.1\mu F$ , within ±25%; Y5V: $\geq 10V$ , within ±30%; $\leq 6.3V$ , within +30/-40% Q/D.F. value: NP0: More than 30pF $Q \geq 350$ , $10pF \leq C \leq 30pF$ , $Q \geq 275+2.5C$ Less than 10pF $Q \geq 200+10C$ X7R, X5R, X6S:			
				<b>Rated vol.</b>	<b>D.F. <math>\leq</math></b>	<b>Exception of D.F. <math>\leq</math></b>	
				$\geq 100V$	$\leq 3\%$	$\leq 6\%$	$1206 \geq 0.47\mu F$
						$\leq 7.5\%$	$0805 > 0.1\mu F, 0603 \geq 0.068\mu F$
				$\geq 50V$	$\leq 3\%$	$\leq 6\%$	$0201(50V); 0603 \geq 0.047\mu F;$ $0805 \geq 0.18\mu F; 1206 \geq 0.47\mu F$
						$\leq 10\%$	$1210 \geq 4.7\mu F$
						$\leq 20\%$	$0402 \geq 0.1\mu F; 0603 \geq 1\mu F;$ $0805 \geq 1\mu F; 1206 \geq 4.7\mu F; 1210 \geq 10\mu F$ TT series
				$35V$	$\leq 5\%$	$\leq 20\%$	$0603 \geq 1\mu F; 0805 \geq 2.2\mu F; 1210 \geq 10\mu F$
				$25V$	$\leq 5\%$	$\leq 10\%$	$0201 \geq 0.01\mu F; 0805 \geq 1\mu F; 1210 \geq 10\mu F$
						$\leq 14\%$	$0603 \geq 0.33\mu F; 1206 \geq 4.7\mu F$
						$\leq 15\%$	$0402 \geq 0.10\mu F; 0603 \geq 0.47\mu F; 0805 \geq 2.2\mu F; 1206 \geq 6.8\mu F; 1210 \geq 22\mu F$ TT series
						$\leq 20\%$	$0402 \geq 1\mu F$
				$16V$	$\leq 5\%$	$\leq 10\%$	$0201 \geq 0.01\mu F; 0402 \geq 0.033\mu F;$ $0805 \geq 0.68\mu F; 1206 \geq 2.2\mu F; 1210 \geq 4.7\mu F$
						$\leq 15\%$	$0201 \geq 0.1\mu F; 0402 \geq 0.47\mu F;$ $0603 \geq 0.68\mu F; 0805 \geq 2.2\mu F; 1206 \geq 4.7\mu F;$ $1210 \geq 22\mu F$ TT series
						$\leq 7.5\%$	$0201 \geq 0.012\mu F; 0402 \geq 0.33\mu F;$ $0603 \geq 0.33\mu F; 0805 \geq 2.2\mu F; 1206 \geq 2.2\mu F;$ $1210 \geq 22\mu F$
				$10V$	$\leq 15\%$	$\leq 15\%$	$0201 \geq 0.1\mu F; 0402 \geq 1\mu F$ TT series
				$6.3V$	$\leq 15\%$	$\leq 30\%$	$0201 \geq 0.1\mu F; 0402 \geq 1\mu F; 0603 \geq 10\mu F;$ $0805 \geq 4.7\mu F; 1206 \geq 47\mu F; 1210 \geq 100\mu F$ TT series
				$4V$	$\leq 20\%$	-	-

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



No	Item	Test Condition	Requirements																																																
13			<p>Y5V:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F. <math>\leq</math></th> <th colspan="2">Exception of D.F. <math>\leq</math></th> </tr> </thead> <tbody> <tr> <td><math>\geq 50V</math></td> <td>7.5%</td> <td>10%</td> <td>0603<math>\geq 0.1\mu F</math>; 0805<math>\geq 0.47\mu F</math>; 1206<math>\geq 4.7\mu F</math></td> </tr> <tr> <td>35V</td> <td>10%</td> <td>-</td> <td>-</td> </tr> <tr> <td rowspan="2">25V</td> <td rowspan="2">7.5%</td> <td>10%</td> <td>0402<math>\geq 0.047\mu F</math>; 0603<math>\geq 0.1\mu F</math>; 0805<math>\geq 0.33\mu F</math>; 1206<math>\geq 1\mu F</math>; 1210<math>\geq 4.7\mu F</math></td> </tr> <tr> <td>15%</td> <td>0402<math>\geq 0.068\mu F</math>; 0603<math>\geq 0.47\mu F</math>; 1206<math>\geq 4.7\mu F</math>; 1210<math>\geq 22\mu F</math></td> </tr> <tr> <td rowspan="2">16V (C&lt;1<math>\mu F</math>)</td> <td rowspan="2">10%</td> <td>12.5%</td> <td>0402<math>\geq 0.068\mu F</math>; 0603<math>\geq 0.68\mu F</math></td> </tr> <tr> <td>20%</td> <td>0402<math>\geq 0.22\mu F</math></td> </tr> <tr> <td>16V (C<math>\geq 1.0\mu F</math>)</td> <td>12.5%</td> <td>20%</td> <td>0603<math>\geq 2.2\mu F</math>; 0805<math>\geq 3.3\mu F</math>; 1206<math>\geq 10\mu F</math>; 1210<math>\geq 22\mu F</math>; 1812<math>\geq 47\mu F</math></td> </tr> <tr> <td>10V</td> <td>20%</td> <td>30%</td> <td>0402<math>\geq 0.47\mu F</math></td> </tr> <tr> <td>6.3V</td> <td>30%</td> <td>-</td> <td>-</td> </tr> </tbody> </table> <p>*I.R.: <math>\geq 10V</math>, <math>1G\Omega</math> or <math>50 \Omega\text{-}F</math> whichever is smaller. Class II (X7R, X5R, X6S, Y5V)</p> <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: X7R</td> <td rowspan="7">1G<math>\Omega</math> or <math>RxC \geq 10 \Omega\text{-}F</math> whichever is smaller.</td></tr> <tr> <td>50V: 0402<math>\geq 0.1\mu F</math>; 0603<math>\geq 1\mu F</math>; 0805<math>\geq 1\mu F</math>; 1206<math>\geq 4.7\mu F</math>; 1210<math>\geq 4.7\mu F</math></td> </tr> <tr> <td>35V: 0603<math>\geq 1\mu F</math>; 0805<math>\geq 2.2\mu F</math>; 1210<math>\geq 10\mu F</math></td> </tr> <tr> <td>25V: 0402<math>\geq 1\mu F</math>; 0603<math>\geq 2.2\mu F</math>; 0805<math>\geq 2.2\mu F</math>; 1206<math>\geq 10\mu F</math>; 1210<math>\geq 10\mu F</math></td> </tr> <tr> <td>16V: 0402<math>\geq 0.22\mu F</math>; 0603<math>\geq 1\mu F</math>; 0805<math>\geq 2.2\mu F</math>; 1206<math>\geq 10\mu F</math>; 1210<math>\geq 47\mu F</math></td> </tr> <tr> <td>10V: 0201<math>\geq 47nF</math>; 0402<math>\geq 0.47\mu F</math>; 0603<math>\geq 0.47\mu F</math>; 0805<math>\geq 2.2\mu F</math></td> </tr> <tr> <td>1206<math>\geq 4.7\mu F</math>; 1210<math>\geq 47\mu F</math></td> </tr> <tr> <td>6.3V ; 4V</td> <td></td></tr> </tbody> </table>	Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$		$\geq 50V$	7.5%	10%	0603 $\geq 0.1\mu F$ ; 0805 $\geq 0.47\mu F$ ; 1206 $\geq 4.7\mu F$	35V	10%	-	-	25V	7.5%	10%	0402 $\geq 0.047\mu F$ ; 0603 $\geq 0.1\mu F$ ; 0805 $\geq 0.33\mu F$ ; 1206 $\geq 1\mu F$ ; 1210 $\geq 4.7\mu F$	15%	0402 $\geq 0.068\mu F$ ; 0603 $\geq 0.47\mu F$ ; 1206 $\geq 4.7\mu F$ ; 1210 $\geq 22\mu F$	16V (C<1 $\mu F$ )	10%	12.5%	0402 $\geq 0.068\mu F$ ; 0603 $\geq 0.68\mu F$	20%	0402 $\geq 0.22\mu F$	16V (C $\geq 1.0\mu F$ )	12.5%	20%	0603 $\geq 2.2\mu F$ ; 0805 $\geq 3.3\mu F$ ; 1206 $\geq 10\mu F$ ; 1210 $\geq 22\mu F$ ; 1812 $\geq 47\mu F$	10V	20%	30%	0402 $\geq 0.47\mu F$	6.3V	30%	-	-	Rated voltage	Insulation Resistance	100V: X7R	1G $\Omega$ or $RxC \geq 10 \Omega\text{-}F$ whichever is smaller.	50V: 0402 $\geq 0.1\mu F$ ; 0603 $\geq 1\mu F$ ; 0805 $\geq 1\mu F$ ; 1206 $\geq 4.7\mu F$ ; 1210 $\geq 4.7\mu F$	35V: 0603 $\geq 1\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1210 $\geq 10\mu F$	25V: 0402 $\geq 1\mu F$ ; 0603 $\geq 2.2\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1206 $\geq 10\mu F$ ; 1210 $\geq 10\mu F$	16V: 0402 $\geq 0.22\mu F$ ; 0603 $\geq 1\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1206 $\geq 10\mu F$ ; 1210 $\geq 47\mu F$	10V: 0201 $\geq 47nF$ ; 0402 $\geq 0.47\mu F$ ; 0603 $\geq 0.47\mu F$ ; 0805 $\geq 2.2\mu F$	1206 $\geq 4.7\mu F$ ; 1210 $\geq 47\mu F$	6.3V ; 4V	
Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$																																																	
$\geq 50V$	7.5%	10%	0603 $\geq 0.1\mu F$ ; 0805 $\geq 0.47\mu F$ ; 1206 $\geq 4.7\mu F$																																																
35V	10%	-	-																																																
25V	7.5%	10%	0402 $\geq 0.047\mu F$ ; 0603 $\geq 0.1\mu F$ ; 0805 $\geq 0.33\mu F$ ; 1206 $\geq 1\mu F$ ; 1210 $\geq 4.7\mu F$																																																
		15%	0402 $\geq 0.068\mu F$ ; 0603 $\geq 0.47\mu F$ ; 1206 $\geq 4.7\mu F$ ; 1210 $\geq 22\mu F$																																																
16V (C<1 $\mu F$ )	10%	12.5%	0402 $\geq 0.068\mu F$ ; 0603 $\geq 0.68\mu F$																																																
		20%	0402 $\geq 0.22\mu F$																																																
16V (C $\geq 1.0\mu F$ )	12.5%	20%	0603 $\geq 2.2\mu F$ ; 0805 $\geq 3.3\mu F$ ; 1206 $\geq 10\mu F$ ; 1210 $\geq 22\mu F$ ; 1812 $\geq 47\mu F$																																																
10V	20%	30%	0402 $\geq 0.47\mu F$																																																
6.3V	30%	-	-																																																
Rated voltage	Insulation Resistance																																																		
100V: X7R	1G $\Omega$ or $RxC \geq 10 \Omega\text{-}F$ whichever is smaller.																																																		
50V: 0402 $\geq 0.1\mu F$ ; 0603 $\geq 1\mu F$ ; 0805 $\geq 1\mu F$ ; 1206 $\geq 4.7\mu F$ ; 1210 $\geq 4.7\mu F$																																																			
35V: 0603 $\geq 1\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1210 $\geq 10\mu F$																																																			
25V: 0402 $\geq 1\mu F$ ; 0603 $\geq 2.2\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1206 $\geq 10\mu F$ ; 1210 $\geq 10\mu F$																																																			
16V: 0402 $\geq 0.22\mu F$ ; 0603 $\geq 1\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1206 $\geq 10\mu F$ ; 1210 $\geq 47\mu F$																																																			
10V: 0201 $\geq 47nF$ ; 0402 $\geq 0.47\mu F$ ; 0603 $\geq 0.47\mu F$ ; 0805 $\geq 2.2\mu F$																																																			
1206 $\geq 4.7\mu F$ ; 1210 $\geq 47\mu F$																																																			
6.3V ; 4V																																																			
14	Humidity (Damp Heat) Load	<p>Test temp.: <math>40\pm 2^\circ C</math> Humidity: 90~95%RH Test time: 500+24/-0 hrs.</p> <p>To apply voltage : rated voltage. Before initial measurement (Class II only): To apply test voltage for 1 hr at <math>40^\circ C</math> and then set for <math>24\pm 2</math> hrs at room temp.</p> <p>Measurement to be made after keeping at room temp. for <math>24\pm 2</math> hrs.</p>	<p>No remarkable damage. Cap change: NP0: <math>\pm 7.5\%</math> or <math>0.75pF</math> whichever is larger. X7R, X5R, X6S: <math>\geq 10V^{**}</math>, within <math>\pm 12.5\%</math>; <math>\leq 6.3V</math> within <math>\pm 25\%</math>; TT series &amp; C<math>\geq 1\mu F</math>, within <math>\pm 25\%</math></p> <p>**10V: 0603<math>\geq 4.7\mu F</math>; 0402<math>\geq 1\mu F</math>; 0201<math>\geq 0.1\mu F</math>, within <math>\pm 25\%</math>; Y5V: <math>\geq 10V</math>, within <math>\pm 30\%</math>; <math>\leq 6.3V</math>, within <math>+30/-40\%</math> Q/D.F. value: NP0: C<math>\geq 30pF</math>, Q<math>\geq 200</math>; C<math>&lt; 30pF</math>, Q<math>\geq 100+10/3C</math></p>																																																

# General Purpose Multilayer Ceramic Capacitors 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



No	Item	Test Condition	Requirements																																																																																																						
14	Humidity (Damp Heat) Load		X7R, X5R, X6S:																																																																																																						
				<table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.<math>\leq</math></th> <th colspan="2">Exception of D.F. <math>\leq</math></th> </tr> </thead> <tbody> <tr> <td rowspan="2"><math>\geq 100V</math></td> <td rowspan="2"><math>\leq 3\%</math></td> <td><math>\leq 6\%</math></td> <td><math>1206 \geq 0.47\mu F</math></td> </tr> <tr> <td><math>\leq 7.5\%</math></td> <td><math>0805 &gt; 0.1\mu F, 0603 \geq 0.068\mu F</math></td> </tr> <tr> <td rowspan="3"><math>\geq 50V</math></td> <td rowspan="3"><math>\leq 3\%</math></td> <td><math>\leq 6\%</math></td> <td><math>0201(50V); 0603 \geq 0.047\mu F; 0805 \geq 0.18\mu F; 1206 \geq 0.47\mu F</math></td> </tr> <tr> <td><math>\leq 10\%</math></td> <td><math>1210 \geq 4.7\mu F</math></td> </tr> <tr> <td><math>\leq 20\%</math></td> <td><math>0402 \geq 0.1\mu F; 0603 \geq 1\mu F; 0805 \geq 1\mu F; 1206 \geq 4.7\mu F; 1210 \geq 10\mu F</math> TT series</td> </tr> <tr> <td><math>35V</math></td> <td><math>\leq 5\%</math></td> <td><math>\leq 20\%</math></td> <td><math>0603 \geq 1\mu F; 0805 \geq 2.2\mu F; 1210 \geq 10\mu F</math></td> </tr> <tr> <td rowspan="4"><math>25V</math></td> <td rowspan="4"><math>\leq 5\%</math></td> <td><math>\leq 10\%</math></td> <td><math>0201 \geq 0.01\mu F; 0805 \geq 1\mu F; 1210 \geq 10\mu F</math></td> </tr> <tr> <td><math>\leq 14\%</math></td> <td><math>0603 \geq 0.33\mu F; 1206 \geq 4.7\mu F</math></td> </tr> <tr> <td><math>\leq 15\%</math></td> <td><math>0402 \geq 0.10\mu F; 0603 \geq 0.47\mu F; 0805 \geq 2.2\mu F; 1206 \geq 6.8\mu F; 1210 \geq 22\mu F</math> TT series</td> </tr> <tr> <td><math>\leq 20\%</math></td> <td><math>0402 \geq 1\mu F</math></td> </tr> <tr> <td rowspan="2"><math>16V</math></td> <td rowspan="2"><math>\leq 5\%</math></td> <td><math>\leq 10\%</math></td> <td><math>0201 \geq 0.01\mu F; 0402 \geq 0.033\mu F; 0805 \geq 0.68\mu F; 1206 \geq 2.2\mu F; 1210 \geq 4.7\mu F</math></td> </tr> <tr> <td><math>\leq 15\%</math></td> <td><math>0201 \geq 0.1\mu F; 0402 \geq 0.47\mu F; 0603 \geq 0.68\mu F; 0805 \geq 2.2\mu F; 1206 \geq 4.7\mu F; 1210 \geq 22\mu F</math> TT series</td> </tr> <tr> <td rowspan="2"><math>10V</math></td> <td rowspan="2"><math>\leq 7.5\%</math></td> <td><math>\leq 15\%</math></td> <td><math>0201 \geq 0.012\mu F; 0402 \geq 0.33\mu F; (0402/X7R \geq 0.22\mu F); 0603 \geq 0.33\mu F; 0805 \geq 2.2\mu F; 1206 \geq 2.2\mu F; 1210 \geq 22\mu F</math></td> </tr> <tr> <td><math>\leq 20\%</math></td> <td><math>0201 \geq 0.1\mu F; 0402 \geq 1\mu F</math> TT series</td> </tr> <tr> <td><math>6.3V</math></td> <td><math>\leq 15\%</math></td> <td><math>\leq 30\%</math></td> <td><math>0201 \geq 0.1\mu F; 0402 \geq 1\mu F; 0603 \geq 10\mu F; 0805 \geq 4.7\mu F; 1206 \geq 47\mu F; 1210 \geq 100\mu F</math> TT series</td> </tr> <tr> <td><math>4V</math></td> <td><math>\leq 20\%</math></td> <td>-</td> <td>-</td> </tr> <tr> <td colspan="7">Y5V:</td></tr> <tr> <td></td><td></td><td colspan="4"> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.<math>\leq</math></th> <th colspan="2">Exception of D.F. <math>\leq</math></th> </tr> </thead> <tbody> <tr> <td><math>\geq 50V</math></td> <td><math>7.5\%</math></td> <td><math>10\%</math></td> <td><math>0603 \geq 0.1\mu F; 0805 \geq 0.47\mu F; 1206 \geq 4.7\mu F</math></td> </tr> <tr> <td><math>35V</math></td> <td><math>10\%</math></td> <td>-</td> <td>-</td> </tr> <tr> <td rowspan="2"><math>25V</math></td> <td rowspan="2"><math>7.5\%</math></td> <td><math>10\%</math></td> <td><math>0402 \geq 0.047\mu F; 0603 \geq 0.1\mu F; 0805 \geq 0.33\mu F; 1206 \geq 1\mu F; 1210 \geq 4.7\mu F</math></td> </tr> <tr> <td><math>15\%</math></td> <td><math>0402 \geq 0.068\mu F; 0603 \geq 0.47\mu F; 1206 \geq 4.7\mu F; 1210 \geq 22\mu F</math></td> </tr> <tr> <td rowspan="2"><math>16V</math> (<math>C &lt; 1\mu F</math>)</td> <td rowspan="2"><math>10\%</math></td> <td><math>12.5\%</math></td> <td><math>0402 \geq 0.068\mu F; 0603 \geq 0.68\mu F</math></td> </tr> <tr> <td><math>20\%</math></td> <td><math>0402 \geq 0.22\mu F</math></td> </tr> <tr> <td><math>16V</math> (<math>C \geq 1.0\mu F</math>)</td> <td><math>12.5\%</math></td> <td><math>20\%</math></td> <td><math>0603 \geq 2.2\mu F; 0805 \geq 3.3\mu F; 1206 \geq 10\mu F; 1210 \geq 22\mu F; 1812 \geq 47\mu F</math></td> </tr> <tr> <td><math>10V</math></td> <td><math>20\%</math></td> <td><math>30\%</math></td> <td><math>0402 \geq 0.47\mu F</math></td> </tr> <tr> <td><math>6.3V</math></td> <td><math>30\%</math></td> <td>-</td> <td>-</td> </tr> </tbody> </table> </td></tr> </tbody> </table>	Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$		$\geq 100V$	$\leq 3\%$	$\leq 6\%$	$1206 \geq 0.47\mu F$	$\leq 7.5\%$	$0805 > 0.1\mu F, 0603 \geq 0.068\mu F$	$\geq 50V$	$\leq 3\%$	$\leq 6\%$	$0201(50V); 0603 \geq 0.047\mu F; 0805 \geq 0.18\mu F; 1206 \geq 0.47\mu F$	$\leq 10\%$	$1210 \geq 4.7\mu F$	$\leq 20\%$	$0402 \geq 0.1\mu F; 0603 \geq 1\mu F; 0805 \geq 1\mu F; 1206 \geq 4.7\mu F; 1210 \geq 10\mu F$ TT series	$35V$	$\leq 5\%$	$\leq 20\%$	$0603 \geq 1\mu F; 0805 \geq 2.2\mu F; 1210 \geq 10\mu F$	$25V$	$\leq 5\%$	$\leq 10\%$	$0201 \geq 0.01\mu F; 0805 \geq 1\mu F; 1210 \geq 10\mu F$	$\leq 14\%$	$0603 \geq 0.33\mu F; 1206 \geq 4.7\mu F$	$\leq 15\%$	$0402 \geq 0.10\mu F; 0603 \geq 0.47\mu F; 0805 \geq 2.2\mu F; 1206 \geq 6.8\mu F; 1210 \geq 22\mu F$ TT series	$\leq 20\%$	$0402 \geq 1\mu F$	$16V$	$\leq 5\%$	$\leq 10\%$	$0201 \geq 0.01\mu F; 0402 \geq 0.033\mu F; 0805 \geq 0.68\mu F; 1206 \geq 2.2\mu F; 1210 \geq 4.7\mu F$	$\leq 15\%$	$0201 \geq 0.1\mu F; 0402 \geq 0.47\mu F; 0603 \geq 0.68\mu F; 0805 \geq 2.2\mu F; 1206 \geq 4.7\mu F; 1210 \geq 22\mu F$ TT series	$10V$	$\leq 7.5\%$	$\leq 15\%$	$0201 \geq 0.012\mu F; 0402 \geq 0.33\mu F; (0402/X7R \geq 0.22\mu F); 0603 \geq 0.33\mu F; 0805 \geq 2.2\mu F; 1206 \geq 2.2\mu F; 1210 \geq 22\mu F$	$\leq 20\%$	$0201 \geq 0.1\mu F; 0402 \geq 1\mu F$ TT series	$6.3V$	$\leq 15\%$	$\leq 30\%$	$0201 \geq 0.1\mu F; 0402 \geq 1\mu F; 0603 \geq 10\mu F; 0805 \geq 4.7\mu F; 1206 \geq 47\mu F; 1210 \geq 100\mu F$ TT series	$4V$	$\leq 20\%$	-	-	Y5V:									<table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.<math>\leq</math></th> <th colspan="2">Exception of D.F. <math>\leq</math></th> </tr> </thead> <tbody> <tr> <td><math>\geq 50V</math></td> <td><math>7.5\%</math></td> <td><math>10\%</math></td> <td><math>0603 \geq 0.1\mu F; 0805 \geq 0.47\mu F; 1206 \geq 4.7\mu F</math></td> </tr> <tr> <td><math>35V</math></td> <td><math>10\%</math></td> <td>-</td> <td>-</td> </tr> <tr> <td rowspan="2"><math>25V</math></td> <td rowspan="2"><math>7.5\%</math></td> <td><math>10\%</math></td> <td><math>0402 \geq 0.047\mu F; 0603 \geq 0.1\mu F; 0805 \geq 0.33\mu F; 1206 \geq 1\mu F; 1210 \geq 4.7\mu F</math></td> </tr> <tr> <td><math>15\%</math></td> <td><math>0402 \geq 0.068\mu F; 0603 \geq 0.47\mu F; 1206 \geq 4.7\mu F; 1210 \geq 22\mu F</math></td> </tr> <tr> <td rowspan="2"><math>16V</math> (<math>C &lt; 1\mu F</math>)</td> <td rowspan="2"><math>10\%</math></td> <td><math>12.5\%</math></td> <td><math>0402 \geq 0.068\mu F; 0603 \geq 0.68\mu F</math></td> </tr> <tr> <td><math>20\%</math></td> <td><math>0402 \geq 0.22\mu F</math></td> </tr> <tr> <td><math>16V</math> (<math>C \geq 1.0\mu F</math>)</td> <td><math>12.5\%</math></td> <td><math>20\%</math></td> <td><math>0603 \geq 2.2\mu F; 0805 \geq 3.3\mu F; 1206 \geq 10\mu F; 1210 \geq 22\mu F; 1812 \geq 47\mu F</math></td> </tr> <tr> <td><math>10V</math></td> <td><math>20\%</math></td> <td><math>30\%</math></td> <td><math>0402 \geq 0.47\mu F</math></td> </tr> <tr> <td><math>6.3V</math></td> <td><math>30\%</math></td> <td>-</td> <td>-</td> </tr> </tbody> </table>				Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$		$\geq 50V$	$7.5\%$	$10\%$	$0603 \geq 0.1\mu F; 0805 \geq 0.47\mu F; 1206 \geq 4.7\mu F$	$35V$	$10\%$	-	-	$25V$	$7.5\%$	$10\%$	$0402 \geq 0.047\mu F; 0603 \geq 0.1\mu F; 0805 \geq 0.33\mu F; 1206 \geq 1\mu F; 1210 \geq 4.7\mu F$	$15\%$	$0402 \geq 0.068\mu F; 0603 \geq 0.47\mu F; 1206 \geq 4.7\mu F; 1210 \geq 22\mu F$	$16V$ ( $C < 1\mu F$ )	$10\%$	$12.5\%$	$0402 \geq 0.068\mu F; 0603 \geq 0.68\mu F$	$20\%$	$0402 \geq 0.22\mu F$	$16V$ ( $C \geq 1.0\mu F$ )	$12.5\%$	$20\%$	$0603 \geq 2.2\mu F; 0805 \geq 3.3\mu F; 1206 \geq 10\mu F; 1210 \geq 22\mu F; 1812 \geq 47\mu F$	$10V$	$20\%$	$30\%$	$0402 \geq 0.47\mu F$	$6.3V$	$30\%$	-	-
		Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$																																																																																																					
		$\geq 100V$	$\leq 3\%$	$\leq 6\%$	$1206 \geq 0.47\mu F$																																																																																																				
				$\leq 7.5\%$	$0805 > 0.1\mu F, 0603 \geq 0.068\mu F$																																																																																																				
		$\geq 50V$	$\leq 3\%$	$\leq 6\%$	$0201(50V); 0603 \geq 0.047\mu F; 0805 \geq 0.18\mu F; 1206 \geq 0.47\mu F$																																																																																																				
				$\leq 10\%$	$1210 \geq 4.7\mu F$																																																																																																				
				$\leq 20\%$	$0402 \geq 0.1\mu F; 0603 \geq 1\mu F; 0805 \geq 1\mu F; 1206 \geq 4.7\mu F; 1210 \geq 10\mu F$ TT series																																																																																																				
		$35V$	$\leq 5\%$	$\leq 20\%$	$0603 \geq 1\mu F; 0805 \geq 2.2\mu F; 1210 \geq 10\mu F$																																																																																																				
		$25V$	$\leq 5\%$	$\leq 10\%$	$0201 \geq 0.01\mu F; 0805 \geq 1\mu F; 1210 \geq 10\mu F$																																																																																																				
				$\leq 14\%$	$0603 \geq 0.33\mu F; 1206 \geq 4.7\mu F$																																																																																																				
				$\leq 15\%$	$0402 \geq 0.10\mu F; 0603 \geq 0.47\mu F; 0805 \geq 2.2\mu F; 1206 \geq 6.8\mu F; 1210 \geq 22\mu F$ TT series																																																																																																				
				$\leq 20\%$	$0402 \geq 1\mu F$																																																																																																				
		$16V$	$\leq 5\%$	$\leq 10\%$	$0201 \geq 0.01\mu F; 0402 \geq 0.033\mu F; 0805 \geq 0.68\mu F; 1206 \geq 2.2\mu F; 1210 \geq 4.7\mu F$																																																																																																				
$\leq 15\%$	$0201 \geq 0.1\mu F; 0402 \geq 0.47\mu F; 0603 \geq 0.68\mu F; 0805 \geq 2.2\mu F; 1206 \geq 4.7\mu F; 1210 \geq 22\mu F$ TT series																																																																																																								
$10V$	$\leq 7.5\%$	$\leq 15\%$	$0201 \geq 0.012\mu F; 0402 \geq 0.33\mu F; (0402/X7R \geq 0.22\mu F); 0603 \geq 0.33\mu F; 0805 \geq 2.2\mu F; 1206 \geq 2.2\mu F; 1210 \geq 22\mu F$																																																																																																						
		$\leq 20\%$	$0201 \geq 0.1\mu F; 0402 \geq 1\mu F$ TT series																																																																																																						
$6.3V$	$\leq 15\%$	$\leq 30\%$	$0201 \geq 0.1\mu F; 0402 \geq 1\mu F; 0603 \geq 10\mu F; 0805 \geq 4.7\mu F; 1206 \geq 47\mu F; 1210 \geq 100\mu F$ TT series																																																																																																						
$4V$	$\leq 20\%$	-	-																																																																																																						
Y5V:																																																																																																									
		<table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.<math>\leq</math></th> <th colspan="2">Exception of D.F. <math>\leq</math></th> </tr> </thead> <tbody> <tr> <td><math>\geq 50V</math></td> <td><math>7.5\%</math></td> <td><math>10\%</math></td> <td><math>0603 \geq 0.1\mu F; 0805 \geq 0.47\mu F; 1206 \geq 4.7\mu F</math></td> </tr> <tr> <td><math>35V</math></td> <td><math>10\%</math></td> <td>-</td> <td>-</td> </tr> <tr> <td rowspan="2"><math>25V</math></td> <td rowspan="2"><math>7.5\%</math></td> <td><math>10\%</math></td> <td><math>0402 \geq 0.047\mu F; 0603 \geq 0.1\mu F; 0805 \geq 0.33\mu F; 1206 \geq 1\mu F; 1210 \geq 4.7\mu F</math></td> </tr> <tr> <td><math>15\%</math></td> <td><math>0402 \geq 0.068\mu F; 0603 \geq 0.47\mu F; 1206 \geq 4.7\mu F; 1210 \geq 22\mu F</math></td> </tr> <tr> <td rowspan="2"><math>16V</math> (<math>C &lt; 1\mu F</math>)</td> <td rowspan="2"><math>10\%</math></td> <td><math>12.5\%</math></td> <td><math>0402 \geq 0.068\mu F; 0603 \geq 0.68\mu F</math></td> </tr> <tr> <td><math>20\%</math></td> <td><math>0402 \geq 0.22\mu F</math></td> </tr> <tr> <td><math>16V</math> (<math>C \geq 1.0\mu F</math>)</td> <td><math>12.5\%</math></td> <td><math>20\%</math></td> <td><math>0603 \geq 2.2\mu F; 0805 \geq 3.3\mu F; 1206 \geq 10\mu F; 1210 \geq 22\mu F; 1812 \geq 47\mu F</math></td> </tr> <tr> <td><math>10V</math></td> <td><math>20\%</math></td> <td><math>30\%</math></td> <td><math>0402 \geq 0.47\mu F</math></td> </tr> <tr> <td><math>6.3V</math></td> <td><math>30\%</math></td> <td>-</td> <td>-</td> </tr> </tbody> </table>				Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$		$\geq 50V$	$7.5\%$	$10\%$	$0603 \geq 0.1\mu F; 0805 \geq 0.47\mu F; 1206 \geq 4.7\mu F$	$35V$	$10\%$	-	-	$25V$	$7.5\%$	$10\%$	$0402 \geq 0.047\mu F; 0603 \geq 0.1\mu F; 0805 \geq 0.33\mu F; 1206 \geq 1\mu F; 1210 \geq 4.7\mu F$	$15\%$	$0402 \geq 0.068\mu F; 0603 \geq 0.47\mu F; 1206 \geq 4.7\mu F; 1210 \geq 22\mu F$	$16V$ ( $C < 1\mu F$ )	$10\%$	$12.5\%$	$0402 \geq 0.068\mu F; 0603 \geq 0.68\mu F$	$20\%$	$0402 \geq 0.22\mu F$	$16V$ ( $C \geq 1.0\mu F$ )	$12.5\%$	$20\%$	$0603 \geq 2.2\mu F; 0805 \geq 3.3\mu F; 1206 \geq 10\mu F; 1210 \geq 22\mu F; 1812 \geq 47\mu F$	$10V$	$20\%$	$30\%$	$0402 \geq 0.47\mu F$	$6.3V$	$30\%$	-	-																																																																
Rated vol.	D.F. $\leq$	Exception of D.F. $\leq$																																																																																																							
$\geq 50V$	$7.5\%$	$10\%$	$0603 \geq 0.1\mu F; 0805 \geq 0.47\mu F; 1206 \geq 4.7\mu F$																																																																																																						
$35V$	$10\%$	-	-																																																																																																						
$25V$	$7.5\%$	$10\%$	$0402 \geq 0.047\mu F; 0603 \geq 0.1\mu F; 0805 \geq 0.33\mu F; 1206 \geq 1\mu F; 1210 \geq 4.7\mu F$																																																																																																						
		$15\%$	$0402 \geq 0.068\mu F; 0603 \geq 0.47\mu F; 1206 \geq 4.7\mu F; 1210 \geq 22\mu F$																																																																																																						
$16V$ ( $C < 1\mu F$ )	$10\%$	$12.5\%$	$0402 \geq 0.068\mu F; 0603 \geq 0.68\mu F$																																																																																																						
		$20\%$	$0402 \geq 0.22\mu F$																																																																																																						
$16V$ ( $C \geq 1.0\mu F$ )	$12.5\%$	$20\%$	$0603 \geq 2.2\mu F; 0805 \geq 3.3\mu F; 1206 \geq 10\mu F; 1210 \geq 22\mu F; 1812 \geq 47\mu F$																																																																																																						
$10V$	$20\%$	$30\%$	$0402 \geq 0.47\mu F$																																																																																																						
$6.3V$	$30\%$	-	-																																																																																																						

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



No	Item	Test Condition	Requirements										
14	Humidity (Damp Heat) Load		<p>*I.R.: <math>\geq 10V</math>, <math>500M\Omega</math> or <math>25 \Omega\cdot F</math> whichever is smaller. Class II (X7R, X5R, X6S, Y5V)</p> <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: X7R</td> <td rowspan="6">500G<math>\Omega</math> or <math>RxC \geq 5 \Omega\cdot F</math> whichever is smaller.</td> </tr> <tr> <td>50V: 0402<math>\geq 0.1\mu F</math>; 0603<math>\geq 1\mu F</math>; 0805<math>\geq 1\mu F</math>; 1206<math>\geq 4.7\mu F</math>; 1210<math>\geq 4.7\mu F</math></td> </tr> <tr> <td>35V: 0603<math>\geq 1\mu F</math>; 0805<math>\geq 2.2\mu F</math>; 1210<math>\geq 10\mu F</math></td> </tr> <tr> <td>25V: 0402<math>\geq 1\mu F</math>; 0603<math>\geq 2.2\mu F</math>; 0805<math>\geq 2.2\mu F</math>; 1206<math>\geq 10\mu F</math>; 1210<math>\geq 10\mu F</math></td> </tr> <tr> <td>16V: 0402<math>\geq 0.22\mu F</math>; 0603<math>\geq 1\mu F</math>; 0805<math>\geq 2.2\mu F</math>; 1206<math>\geq 10\mu F</math>; 1210<math>\geq 47\mu F</math></td> </tr> <tr> <td>10V: 0201<math>\geq 47nF</math>; 0402<math>\geq 0.47\mu F</math>; 0603<math>\geq 0.47\mu F</math>; 0805<math>\geq 2.2\mu F</math>; 1206<math>\geq 4.7\mu F</math>; 1210<math>\geq 47\mu F</math></td> </tr> <tr> <td>6.3V ; 4V ; TT series ; All X6S items</td> </tr> </tbody> </table>	Rated voltage	Insulation Resistance	100V: X7R	500G $\Omega$ or $RxC \geq 5 \Omega\cdot F$ whichever is smaller.	50V: 0402 $\geq 0.1\mu F$ ; 0603 $\geq 1\mu F$ ; 0805 $\geq 1\mu F$ ; 1206 $\geq 4.7\mu F$ ; 1210 $\geq 4.7\mu F$	35V: 0603 $\geq 1\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1210 $\geq 10\mu F$	25V: 0402 $\geq 1\mu F$ ; 0603 $\geq 2.2\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1206 $\geq 10\mu F$ ; 1210 $\geq 10\mu F$	16V: 0402 $\geq 0.22\mu F$ ; 0603 $\geq 1\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1206 $\geq 10\mu F$ ; 1210 $\geq 47\mu F$	10V: 0201 $\geq 47nF$ ; 0402 $\geq 0.47\mu F$ ; 0603 $\geq 0.47\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1206 $\geq 4.7\mu F$ ; 1210 $\geq 47\mu F$	6.3V ; 4V ; TT series ; All X6S items
Rated voltage	Insulation Resistance												
100V: X7R	500G $\Omega$ or $RxC \geq 5 \Omega\cdot F$ whichever is smaller.												
50V: 0402 $\geq 0.1\mu F$ ; 0603 $\geq 1\mu F$ ; 0805 $\geq 1\mu F$ ; 1206 $\geq 4.7\mu F$ ; 1210 $\geq 4.7\mu F$													
35V: 0603 $\geq 1\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1210 $\geq 10\mu F$													
25V: 0402 $\geq 1\mu F$ ; 0603 $\geq 2.2\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1206 $\geq 10\mu F$ ; 1210 $\geq 10\mu F$													
16V: 0402 $\geq 0.22\mu F$ ; 0603 $\geq 1\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1206 $\geq 10\mu F$ ; 1210 $\geq 47\mu F$													
10V: 0201 $\geq 47nF$ ; 0402 $\geq 0.47\mu F$ ; 0603 $\geq 0.47\mu F$ ; 0805 $\geq 2.2\mu F$ ; 1206 $\geq 4.7\mu F$ ; 1210 $\geq 47\mu F$													
6.3V ; 4V ; TT series ; All X6S items													
15.	High Temperature Load (Endurance)	<p>*Test temp.: NP0, X7R/X7E: <math>125\pm 3^\circ C</math> X6S: <math>105\pm 3^\circ C</math> X5R, Y5V: <math>85\pm 3^\circ C</math></p> <p>*Test time: 1000+24/-0 hrs.</p> <p>*To apply voltage:</p> <ol style="list-style-type: none"> <li>1) <math>\leq %</math> of rated voltage.</li> <li>2) <math>10V \leq Ur &lt; 500V</math>:</li> <li>3) 500V: 150% of rated voltage.</li> <li>4) <math>Ur \geq 630V</math>:</li> </ol> <p>120% of rated voltage.</p>	<p>No remarkable damage. Cap change: NP0: <math>\pm 3.0\%</math> or <math>\pm 0.3pF</math> whichever is larger X7R, X5R, X6S: <math>\geq 10V^{**}</math>, within <math>\pm 12.5\%</math>; <math>\leq 6.3V</math> within <math>\pm 25\%</math>; TT series &amp; <math>C \geq 1uF</math>, within <math>\pm 25\%</math></p> <p>**10V: 0603<math>\geq 4.7\mu F</math>; 0402<math>\geq 1\mu F</math>; 0201<math>\geq 0.1\mu F</math>, within <math>\pm 25\%</math>; Y5V: <math>\geq 10V</math>, within <math>\pm 30\%</math>; <math>\leq 6.3V</math>, within <math>+30/-40\%</math></p> <p>Q/D.F. value: NP0: More than 30pF, Q<math>\geq 350</math> <math>10pF \leq C &lt; 30pF</math>, Q<math>\geq 275+2.5C</math> Less than 10pF, Q<math>\geq 200+10C</math></p>										

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)



No	Item	Test Condition				Requirements																																								
15	High Temperature Load (Endurance)	5) 100% of rated voltage for below range.				X7R, X5R, X6S:																																								
		Size	Dielectric	Rated voltage	Capacitance range	<table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th colspan="2">Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td>≥100V</td> <td>≤3%</td> <td>≤6%</td> <td>1206≥0.47μF</td> </tr> <tr> <td></td> <td></td> <td>≤7.5%</td> <td>0805&gt;0.1μF, 0603≥0.068μF</td> </tr> <tr> <td>≥50V</td> <td>≤3%</td> <td>≤6%</td> <td>0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF</td> </tr> <tr> <td></td> <td></td> <td>≤10%</td> <td>1210≥4.7μF</td> </tr> <tr> <td></td> <td></td> <td>≤20%</td> <td>0402≥0.1μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF TT series</td> </tr> <tr> <td>35V</td> <td>≤5%</td> <td>≤20%</td> <td>0603≥1μF; 0805≥2.2μF; 1210≥10μF</td> </tr> <tr> <td></td> <td></td> <td>≤10%</td> <td>0201≥0.01μF; 0805≥1μF; 1210≥10μF</td> </tr> <tr> <td></td> <td></td> <td>≤14%</td> <td>0603≥0.33μF; 1206≥4.7μF</td> </tr> <tr> <td>25V</td> <td>≤5%</td> <td>≤15%</td> <td>0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF; TT series</td> </tr> </tbody> </table>	Rated vol.	D.F.≤	Exception of D.F. ≤		≥100V	≤3%	≤6%	1206≥0.47μF			≤7.5%	0805>0.1μF, 0603≥0.068μF	≥50V	≤3%	≤6%	0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF			≤10%	1210≥4.7μF			≤20%	0402≥0.1μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF TT series	35V	≤5%	≤20%	0603≥1μF; 0805≥2.2μF; 1210≥10μF			≤10%	0201≥0.01μF; 0805≥1μF; 1210≥10μF			≤14%	0603≥0.33μF; 1206≥4.7μF	25V	≤5%	≤15%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF; TT series
Rated vol.	D.F.≤	Exception of D.F. ≤																																												
≥100V	≤3%	≤6%	1206≥0.47μF																																											
		≤7.5%	0805>0.1μF, 0603≥0.068μF																																											
≥50V	≤3%	≤6%	0201(50V); 0603≥0.047μF; 0805≥0.18μF; 1206≥0.47μF																																											
		≤10%	1210≥4.7μF																																											
		≤20%	0402≥0.1μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥10μF TT series																																											
35V	≤5%	≤20%	0603≥1μF; 0805≥2.2μF; 1210≥10μF																																											
		≤10%	0201≥0.01μF; 0805≥1μF; 1210≥10μF																																											
		≤14%	0603≥0.33μF; 1206≥4.7μF																																											
25V	≤5%	≤15%	0402≥0.10μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥6.8μF; 1210≥22μF; TT series																																											
0603	X5R/X7R/ X6S	4V 6.3V,10V 35V	C≥22μF C≥4.7μF C≥1.0μF																																											
0805	X5R/X7R/ X6S	4V 6.3V	C≥47μF C≥22μF																																											
1206	X5R/X7R/ NP0	6.3V 3,000V	C≥47μF C≥1.5pF																																											
TT18	Y5V	6.3V,10	C≥2.2μF																																											
TT21	Y5V	6.3V	C≥10μF																																											
TT31	Y5V	6.3V	C≥22μF																																											
6) 150% of rated voltage for below range.				<table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th>Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td>16V</td> <td>≤5%</td> <td>0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF</td> </tr> <tr> <td></td> <td></td> <td>0201≥0.1μF; 0402≥0.47μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series</td> </tr> <tr> <td>10V</td> <td>≤7.5%</td> <td>0201≥0.012μF 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF;</td> </tr> <tr> <td></td> <td>≤20%</td> <td>0201≥0.1μF; 0402≥1μF</td> </tr> </tbody> </table>	Rated vol.	D.F.≤	Exception of D.F. ≤	16V	≤5%	0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF			0201≥0.1μF; 0402≥0.47μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series	10V	≤7.5%	0201≥0.012μF 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF;		≤20%	0201≥0.1μF; 0402≥1μF	≤15%	0201≥0.012μF 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF;																									
Rated vol.	D.F.≤	Exception of D.F. ≤																																												
16V	≤5%	0201≥0.01μF; 0402≥0.033μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF																																												
		0201≥0.1μF; 0402≥0.47μF; 0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series																																												
10V	≤7.5%	0201≥0.012μF 0402≥0.33μF; 0603≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF;																																												
	≤20%	0201≥0.1μF; 0402≥1μF																																												
6.3V	16V	16V	C≥0.1μF																																											
0402	X5R/X7R/ X6S	50V 10V~25V	C≥0.1μF C≥0.22μF																																											
0603	X5R/X7R/ X6S	10V,50V	C≥1.0μF																																											
0805	X5R/X7R/ X7R	10~50V 50V 100V	C≥2.2μF C≥4.7μF C≥0.47μF																																											
2220	X7R	100V	C≥6.8μF																																											
Y5V:				<table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th colspan="2">Exception of D.F. ≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>7.5%</td> <td>10%</td> <td>0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF</td> </tr> <tr> <td>35V</td> <td>10%</td> <td>-</td> <td>-</td> </tr> <tr> <td>25V</td> <td>7.5%</td> <td>10%</td> <td>0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF</td> </tr> <tr> <td></td> <td></td> <td>15%</td> <td>0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF</td> </tr> <tr> <td>16V (C&lt;1μF)</td> <td>10%</td> <td>12.5%</td> <td>0402≥0.068μF; 0603≥0.68μF</td> </tr> <tr> <td></td> <td></td> <td>20%</td> <td>0402≥0.22μF</td> </tr> <tr> <td>16V (C≥1.0μF)</td> <td>12.5%</td> <td>20%</td> <td>0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF</td> </tr> <tr> <td>10V</td> <td>20%</td> <td>30%</td> <td>0402≥0.47μF</td> </tr> <tr> <td>6.3V</td> <td>30%</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Rated vol.	D.F.≤	Exception of D.F. ≤		≥50V	7.5%	10%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF	35V	10%	-	-	25V	7.5%	10%	0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF			15%	0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF	16V (C<1μF)	10%	12.5%	0402≥0.068μF; 0603≥0.68μF			20%	0402≥0.22μF	16V (C≥1.0μF)	12.5%	20%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF	10V	20%	30%	0402≥0.47μF	6.3V	30%	-	-	10%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF
Rated vol.	D.F.≤	Exception of D.F. ≤																																												
≥50V	7.5%	10%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF																																											
35V	10%	-	-																																											
25V	7.5%	10%	0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF																																											
		15%	0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF																																											
16V (C<1μF)	10%	12.5%	0402≥0.068μF; 0603≥0.68μF																																											
		20%	0402≥0.22μF																																											
16V (C≥1.0μF)	12.5%	20%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF																																											
10V	20%	30%	0402≥0.47μF																																											
6.3V	30%	-	-																																											

# General Purpose Multilayer Ceramic Capacitors


## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)

**multicomp<sup>m</sup>**


No	Item	Test Condition	Requirements										
15	High Temperature Load (Endurance)	<p>*Before initial measurement (Class II only): To apply test voltage for 1hr at test temp. and then set for 24±2 hrs at room temp.</p> <p>*Measurement to be made after keeping at room temp. for 24±2 hrs</p> <p>Ratio (Operating Voltage/Rated Voltage [%])</p> <p>Temperature at Product (°C)</p>	<p>*I.R.: <math>\geq 10V</math>, <math>1G\Omega</math> or <math>50 \Omega\text{-}F</math> whichever is smaller. Class II (X7R, X5R, X6S, Y5V)</p> <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: X7R</td> <td rowspan="6">1GΩ or <math>RxC \geq 10 \Omega\text{-}F</math> whichever is smaller.</td> </tr> <tr> <td>50V: 0402≥0.1μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td> </tr> <tr> <td>35V: 0603≥1μF; 0805≥2.2μF; 1210≥10μF</td> </tr> <tr> <td>25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td> </tr> <tr> <td>16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td> </tr> <tr> <td>10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF;</td> </tr> <tr> <td>6.3V ; 4V ; TT series ; All X6S items</td> </tr> </tbody> </table>	Rated voltage	Insulation Resistance	100V: X7R	1GΩ or $RxC \geq 10 \Omega\text{-}F$ whichever is smaller.	50V: 0402≥0.1μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0603≥1μF; 0805≥2.2μF; 1210≥10μF	25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF;	6.3V ; 4V ; TT series ; All X6S items
Rated voltage	Insulation Resistance												
100V: X7R	1GΩ or $RxC \geq 10 \Omega\text{-}F$ whichever is smaller.												
50V: 0402≥0.1μF; 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF													
35V: 0603≥1μF; 0805≥2.2μF; 1210≥10μF													
25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF													
16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF													
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF;													
6.3V ; 4V ; TT series ; All X6S items													

## Appendices

### Tape & Reel Dimensions

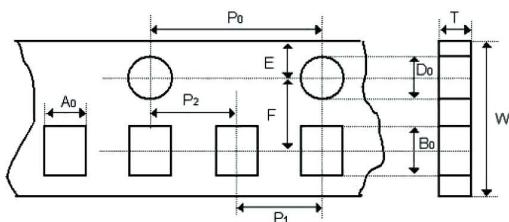

The dimension of paper tape

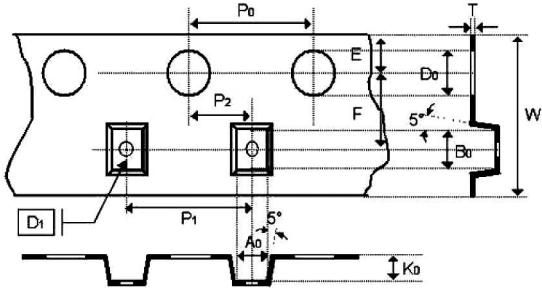


The dimension of plastic tape

Size	0201	0402	0603	0805	1206	1210	1812									
Thickness	L	N	E	S, X	A	B	C, D, I	B	C, J, D	G,P	C, D	G, K	M	D, K	M	U
A <sub>0</sub>	0.38±0.05	0.62±0.05	0.7±0.1	1.02±0.05	1.5±0.1	1.5±0.1	<1.57	2±0.1	<1.85	<1.95	<2.97	<2.97	<2.97	<3.81	<3.81	<3.9
B <sub>0</sub>	0.68±0.05	1.12±0.05	1.2±0.1	1.8±0.05	2.3±0.1	2.3±0.1	<2.40	3.5±0.1	<3.46	<3.67	<3.73	<3.73	<3.73	<5.3	<5.3	<5.3
T	0.42±0.05	0.6±0.05	0.7±0.1	0.95±0.05	0.75±0.05	0.95±0.05	0.23±0.05	0.95±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.25±0.05	0.25±0.05	0.25±0.05
K <sub>0</sub>	-	-	-	-	-	-	<2.5	-	<2.5	<2.5	<2.5	<2.5	<3	<2.5	<3	<3.5
W	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	12±0.2	12±0.2	12±0.2
P <sub>0</sub>	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1
10xP <sub>0</sub>	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.2
P <sub>1</sub>	2±0.05	2±0.05	2±0.05	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	8±0.1	8±0.1	8±0.1
P <sub>2</sub>	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05
D <sub>0</sub>	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05
D <sub>1</sub>	-	-	-	-	-	-	1±0.1	-	1±0.1	1±0.1	1±0.1	1±0.1	1±0.1	1.5±0.1	1.5±0.1	1.5±0.1
E	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1
F	3.50±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	5.5±0.05	5.5±0.05	5.5±0.05

# General Purpose Multilayer Ceramic Capacitors

## 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)


**multicomp<sup>®</sup>**

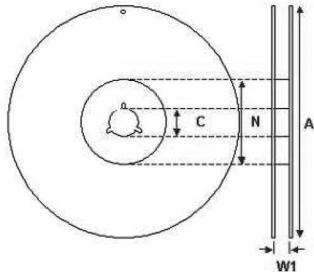

Size	0201, 0402, 0603, 0805, 1206, 1210			1812
Reel size	7"	10"	13"	7"
C	13 +0.5/-0.2	13 +0.5/-0.2	13 +0.5/-0.2	13 +0.5/-0.2
W1	8.4 +1.5/-0	8.4+1.5/-0	8.4 +1.5/-0	12.4+2.0/-0
A	178 ±0.1	250 ±1	330 ±1	178 ±0.1
N	60 +1/-0	100 ±1	100 ±1	60 +1/-0

The dimension of reel

## Constructions:

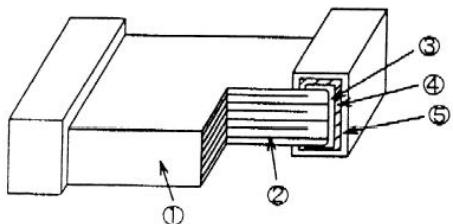

No.	Name		NPO, X7R, X5R, X6S, Y5V
1	Ceramic material	BaTiO <sub>3</sub> based	
2	Inner electrode	Ni	
3	Inner layer	Cu	
4	Termination	Middle layer	Ni
5		Outer layer	Sn

## Storage and handling conditions

- (1) To store products at 5°C to 40°C ambient temperature and 20 to 70% related humidity conditions.
- (2) The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

## Cautions:


- a. The corrosive gas reacts on the terminal electrodes of capacitors, and results in the poor solderability. Do not store the capacitors in the ambience of corrosive gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.)
- b. In corrosive atmosphere, solderability might be degraded, and silver migration might occur to cause low reliability.
- c. Due to the dewing by rapid humidity change, or the photochemical change of the terminal electrode by direct sunlight, the solderability and electrical performance may deteriorate. Do not store capacitors under direct sunlight or dewing condition. To store products on the shelf and avoid exposure to moisture.

# General Purpose Multilayer Ceramic Capacitors 4 to 100V (NPO, X5R, X7R & Y5V Dielectrics)




## Recommended Soldering Conditions:

The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N<sub>2</sub> within oven are recommended.

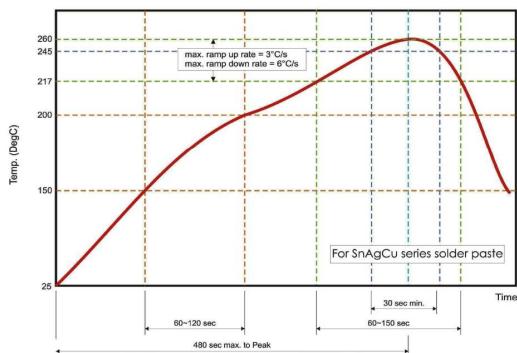

Recommended reflow soldering profile for SMT process with SnAgCu series solder paste.

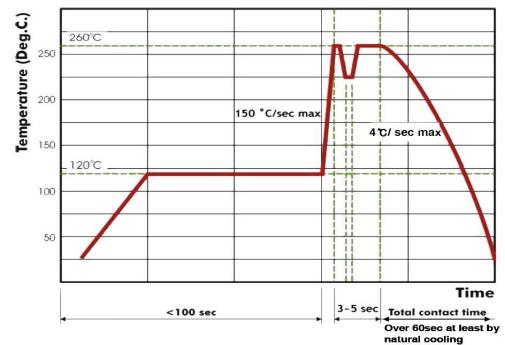

Recommended wave soldering profile for SMT process with SnAgCu series solder.