



**HESTORE.HU**  
elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).



Huajing Discrete Devices



Silicon N-Channel Power MOSFET

**CS1N60 A4H**

## General Description:

CS1N60 A4H, the silicon N-channel Enhanced VDMOSFETs, is obtained by the self-aligned planar Technology which reduce the conduction loss, improve switching performance and enhance the avalanche energy. The transistor can be used in various power switching circuit for system miniaturization and higher efficiency. The package form is TO-252, which accords with the RoHS standard.



## Features:

- | **Fast Switching**
- | **Low ON Resistance( $R_{DS(on)} \leq 15\Omega$ )**
- | **Low Gate Charge (Typical Data:4nC)**
- | **Low Reverse transfer capacitances(Typical:2.6pF)**
- | **100% Single Pulse avalanche energy Test**

## Applications:

Power switch circuit of adaptor and charger.

$V_{DSS}$	600	V
$I_D$	0.8	A
$P_D (T_C=25^\circ C)$	25	W
$R_{DS(ON)Typ}$	11	$\Omega$

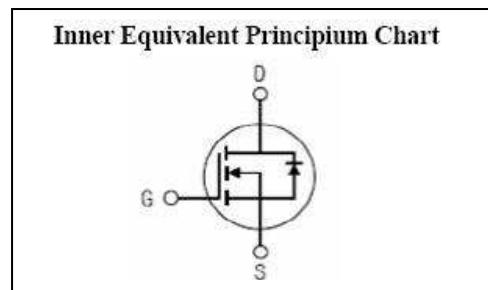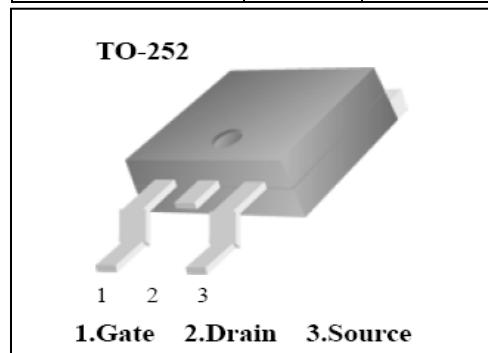

**Absolute** ( $T_C = 25^\circ C$  unless otherwise specified):

Symbol	Parameter	Rating	Units
$V_{DSS}$	Drain-to-Source Voltage	600	V
$I_D$	Continuous Drain Current	0.8	A
	Continuous Drain Current $T_C = 100^\circ C$	0.6	A
$I_{DM}^{a1}$	Pulsed Drain Current	3.2	A
$V_{GS}$	Gate-to-Source Voltage	$\pm 30$	V
$E_{AS}^{a2}$	Single Pulse Avalanche Energy	20	mJ
$E_{AR}^{a1}$	Avalanche Energy ,Repetitive	6	mJ
$I_{AR}^{a1}$	Avalanche Current	1.1	A
$dv/dt^{a3}$	Peak Diode Recovery $dv/dt$	5	V/ns
$P_D$	Power Dissipation	25	W
	Derating Factor above $25^\circ C$	0.2	W/ $^\circ C$
$T_J, T_{stg}$	Operating Junction and Storage Temperature Range	150, -55 to 150	$^\circ C$
$T_L$	MaximumTemperature for Soldering	300	$^\circ C$

**Electrical Characteristics** ( $T_c = 25^\circ C$  unless otherwise specified):

OFF Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$V_{DSS}$	Drain to Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	600	--	--	V
$\Delta BV_{DSS}/\Delta T_J$	Bvdss Temperature Coefficient	$I_D=250\mu A, Reference 25^\circ C$	--	0.55	--	$^\circ C$
$I_{DSS}$	Drain to Source Leakage Current	$V_{DS} = 600V, V_{GS} = 0V, T_a = 25^\circ C$	--	--	1	$\mu A$
		$V_{DS} = 480V, V_{GS} = 0V, T_a = 125^\circ C$	--	--	100	
$I_{GSS(F)}$	Gate to Source Forward Leakage	$V_{GS} = +30V$	--	--	100	nA
$I_{GSS(R)}$	Gate to Source Reverse Leakage	$V_{GS} = -30V$	--	--	-100	nA

ON Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$R_{DS(ON)}$	Drain-to-Source On-Resistance	$V_{GS}=10V, I_D=0.4A$	--	11	15	$\Omega$
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.0		4.0	V
Pulse width $t_p \leq 380\mu s, \delta \leq 2\%$						

Dynamic Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$g_{fs}$	Forward Transconductance	$V_{DS}=15V, I_D = 0.8A$	--	0.9	--	S
$C_{iss}$	Input Capacitance		--	92	--	pF
$C_{oss}$	Output Capacitance	$V_{GS} = 0V, V_{DS} = 25V, f = 1.0MHz$	--	10.7	--	
$C_{rss}$	Reverse Transfer Capacitance		--	2.6	--	

Resistive Switching Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$t_{d(ON)}$	Turn-on Delay Time	$I_D = 0.8A, V_{DD} = 300V, V_{GS} = 10V, R_G = 25\Omega$	--	6.3	--	ns
$t_r$	Rise Time		--	6.3	--	
$t_{d(OFF)}$	Turn-Off Delay Time		--	21	--	
$t_f$	Fall Time		--	15	--	
$Q_g$	Total Gate Charge	$I_D = 0.8A, V_{DD} = 300V, V_{GS} = 10V$	--	4		nC
$Q_{gs}$	Gate to Source Charge		--	0.7		
$Q_{gd}$	Gate to Drain ("Miller") Charge		--	2.1		



Source-Drain Diode Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
I <sub>S</sub>	Continuous Source Current (Body Diode)		--	--	0.8	A
I <sub>SM</sub>	Maximum Pulsed Current (Body Diode)		--	--	3.2	A
V <sub>SD</sub>	Diode Forward Voltage	I <sub>S</sub> =0.8A, V <sub>GS</sub> =0V	--	--	1.5	V
t <sub>rr</sub>	Reverse Recovery Time	I <sub>S</sub> =0.8A, T <sub>j</sub> = 25° C dI <sub>F</sub> /dt=100A/us, V <sub>GS</sub> =0V	--	400		ns
Q <sub>rr</sub>	Reverse Recovery Charge		--	739		nC
Pulse width t <sub>p</sub> ≤380μs, δ ≤2%						

Symbol	Parameter	Typ.	Units
R <sub>θJC</sub>	Junction-to-Case	5.0	°C/W
R <sub>θJA</sub>	Junction-to-Ambient	62	°C/W

<sup>a1</sup>: Repetitive rating; pulse width limited by maximum junction temperature

<sup>a2</sup>: L=10.0mH, I<sub>D</sub>=2A, Start T<sub>j</sub>=25°C

<sup>a3</sup>: I<sub>SD</sub>=0.8A, di/dt ≤100A/us, V<sub>DD</sub>≤BV<sub>DS</sub>, Start T<sub>j</sub>=25°C

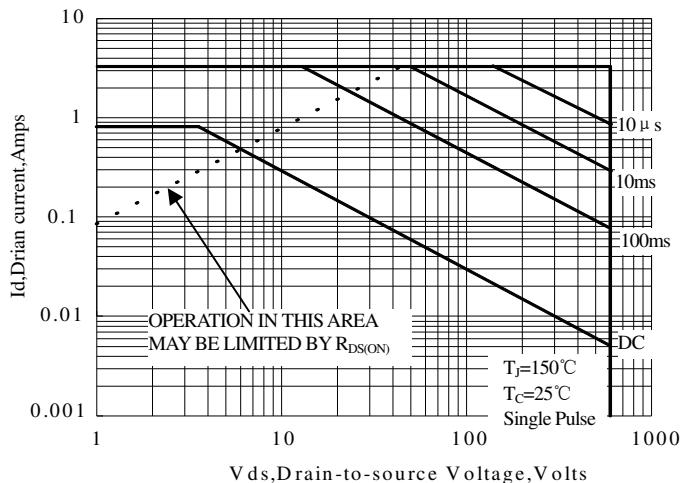
**Characteristics Curve:**


Figure 1 Maximum Forward Bias Safe Operating Area

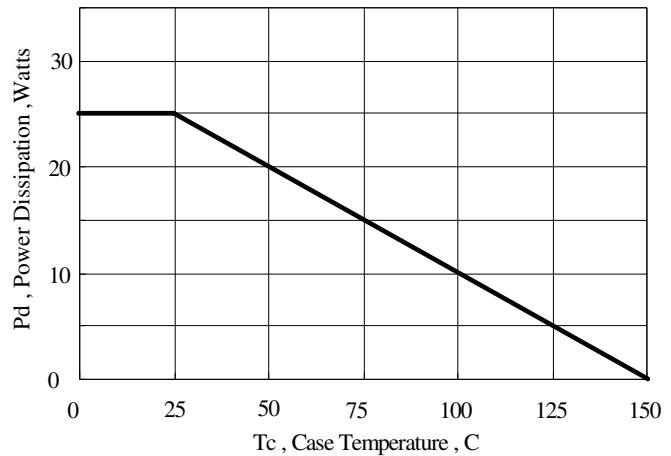


Figure 2 Maximum Power Dissipation vs Case Temperature

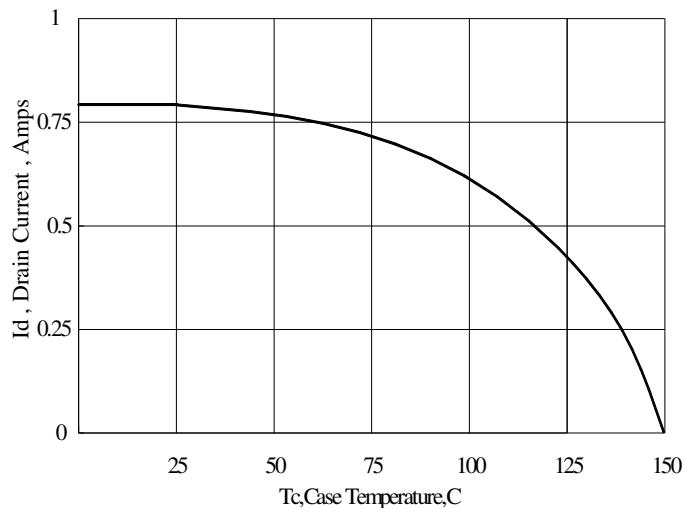


Figure 3 Maximum Continuous Drain Current vs Case Temperature

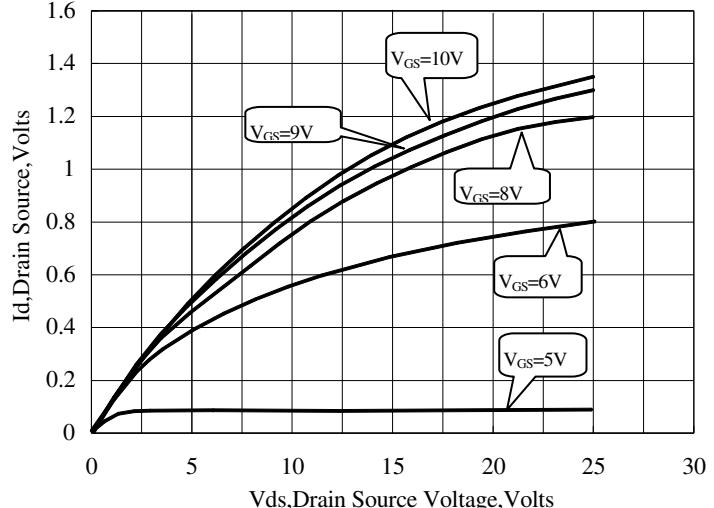


Figure 4 Typical Output Characteristics

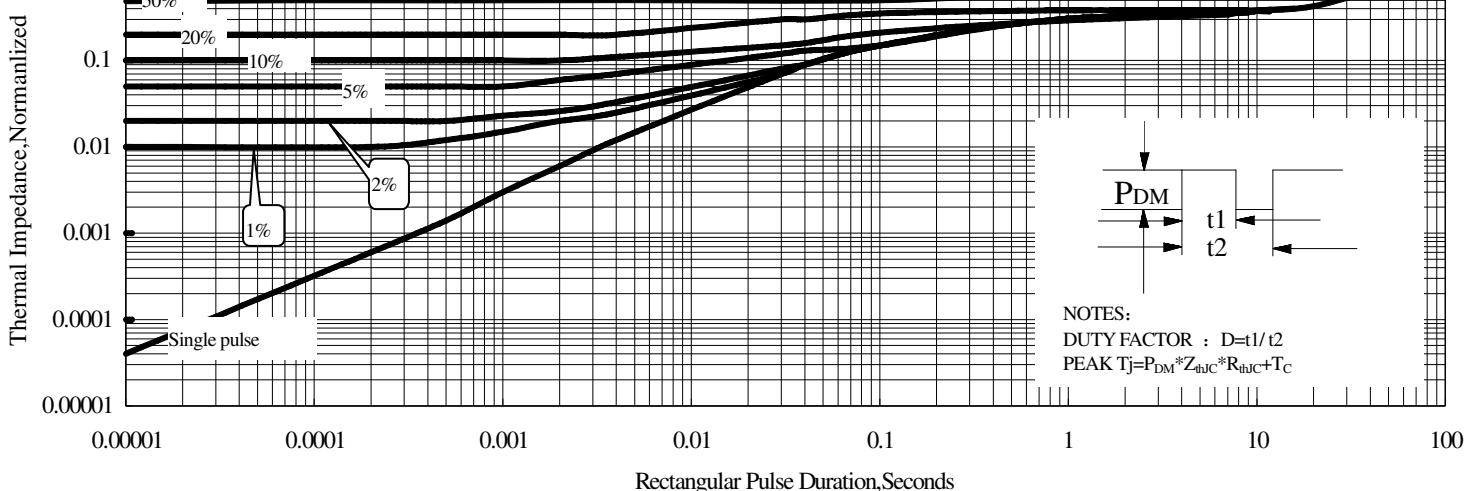


Figure 5 Maximum Effective Thermal Impedance, Junction to Case

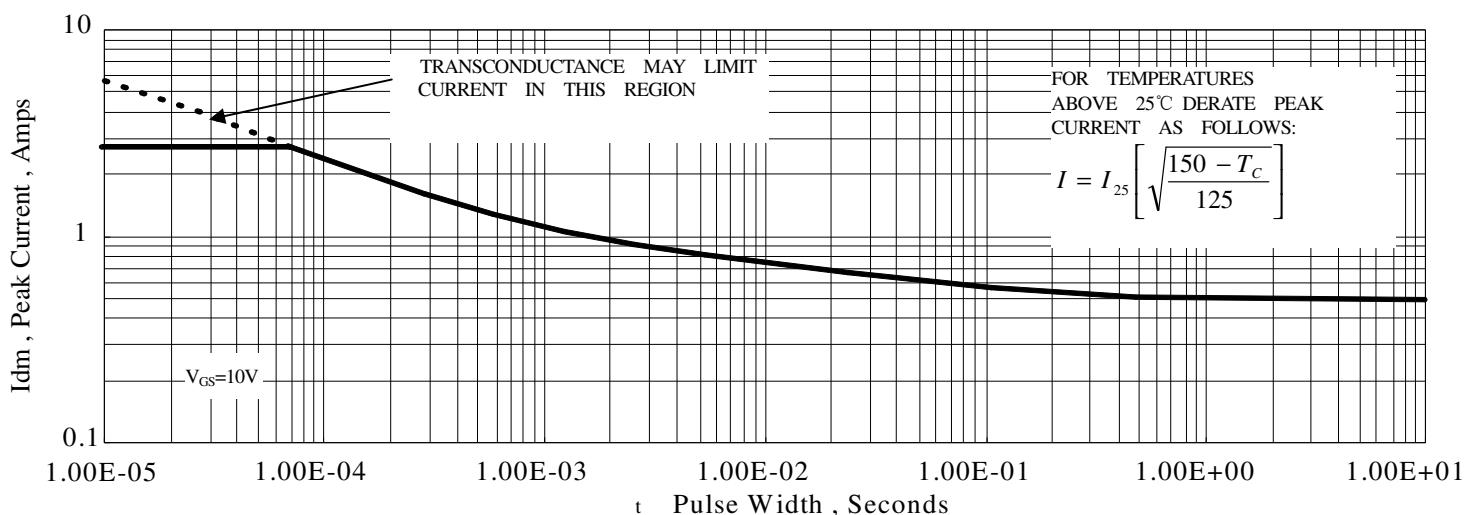


Figure 6 Maximum Peak Current Capability

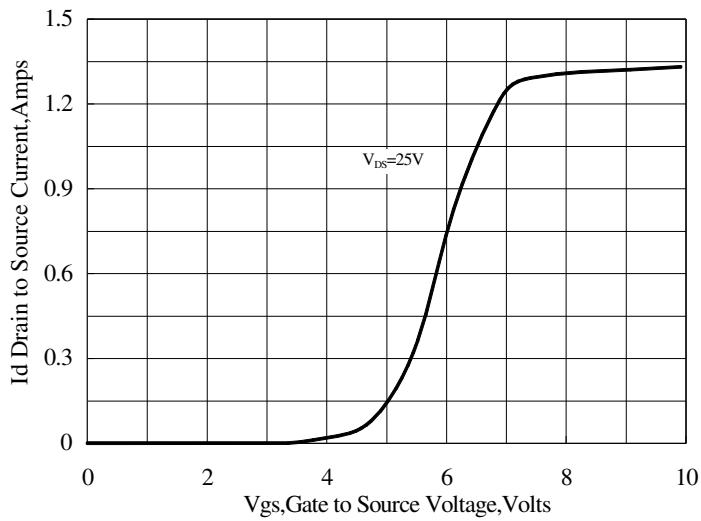


Figure 7 Typical Transfer Characteristics

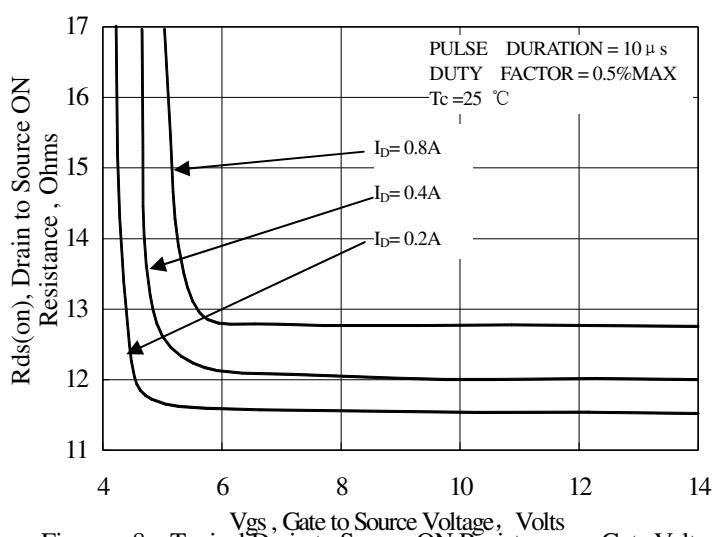


Figure 8 Typical Drain to Source ON Resistance vs Gate Voltage and Drain Current

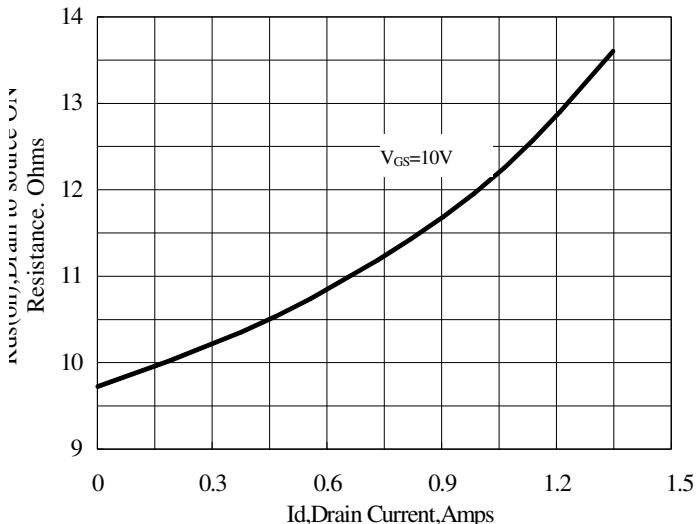


Figure 9 Typical Drain to Source ON Resistance vs Drain Current

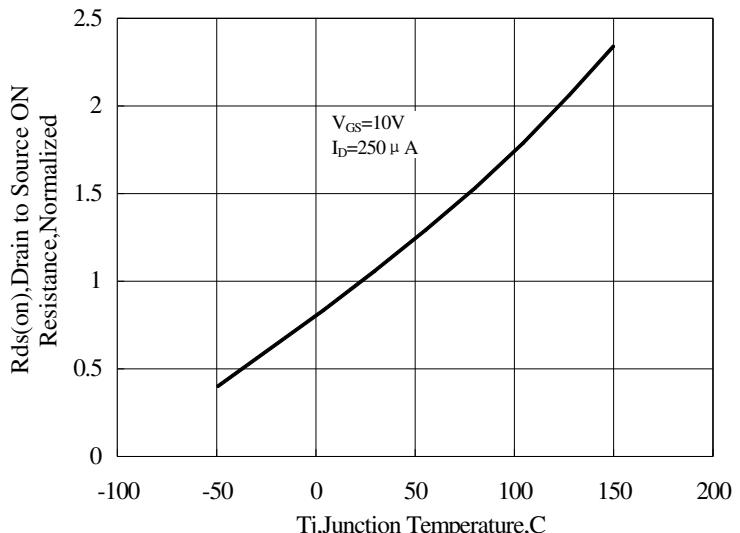


Figure 10 Typical Drian to Source on Resistance vs Junction Temperature

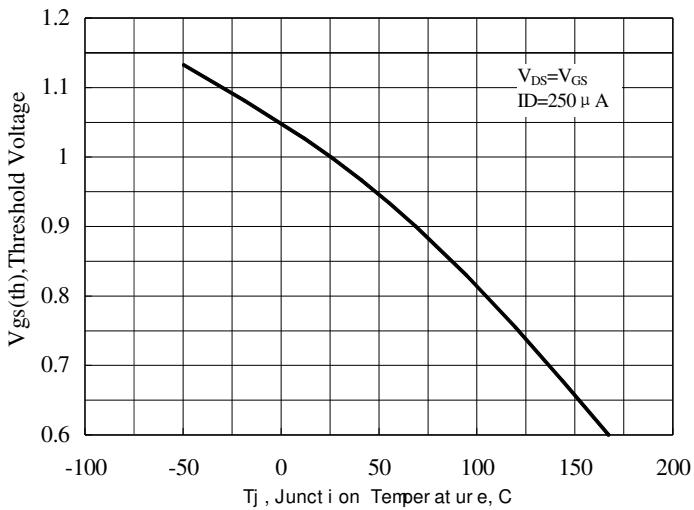


Figure 11 Typical Threshold Voltage vs Junction Temperature

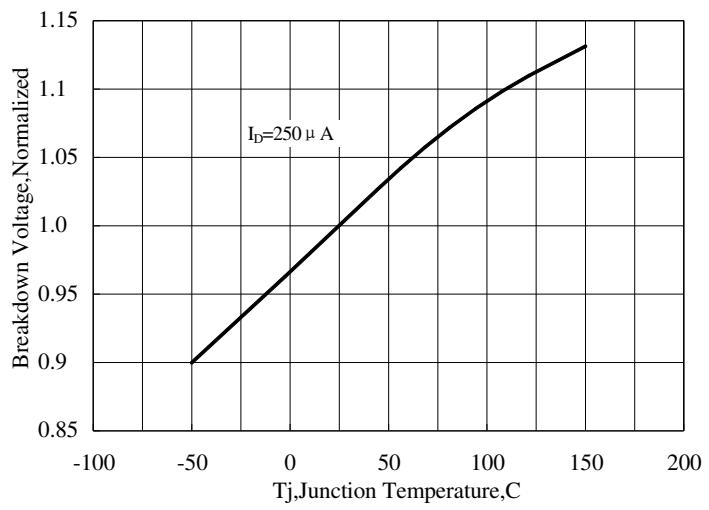


Figure 12 Typical Breakdown Voltage vs Junction Temperature

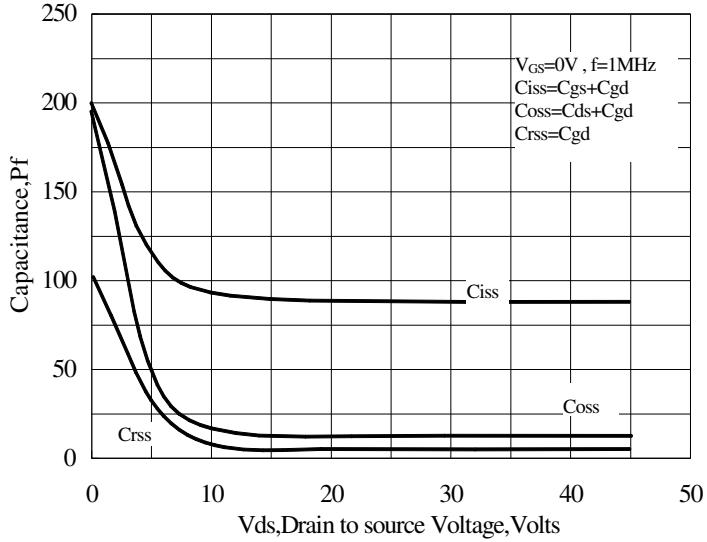


Figure 13 Typical Capacitance vs Drain to Source Voltage

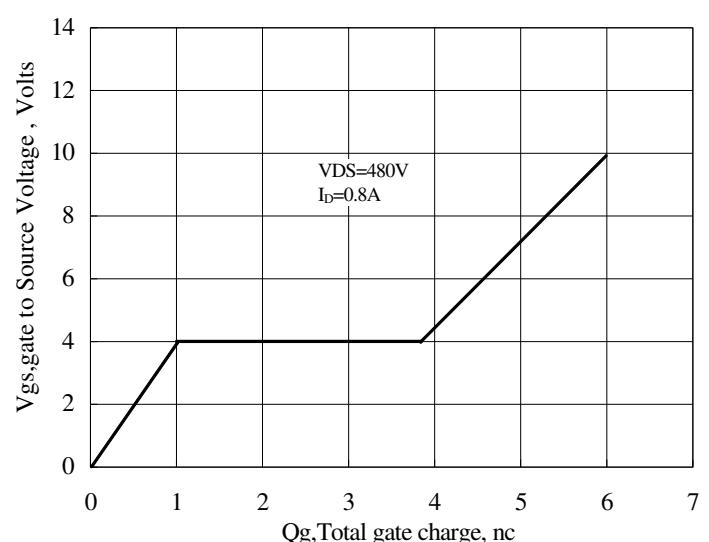


Figure 14 Typical Gate Charge vs Gate to Source Voltage

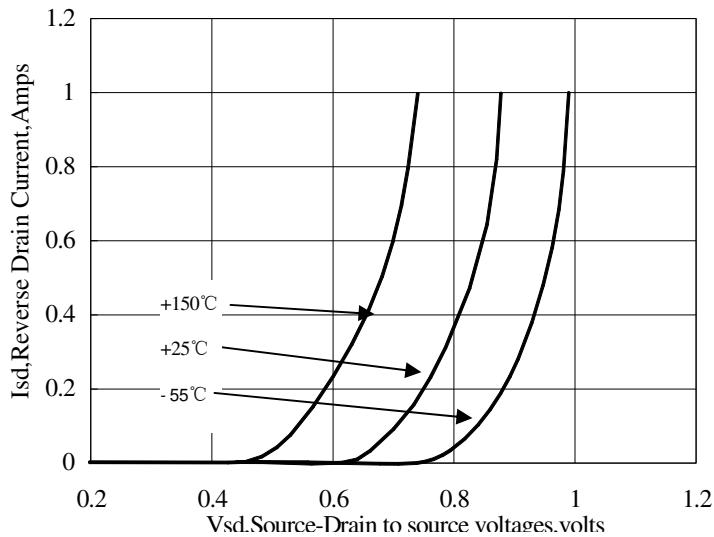


Figure 15 Typical Body Diode Transfer Characteristics

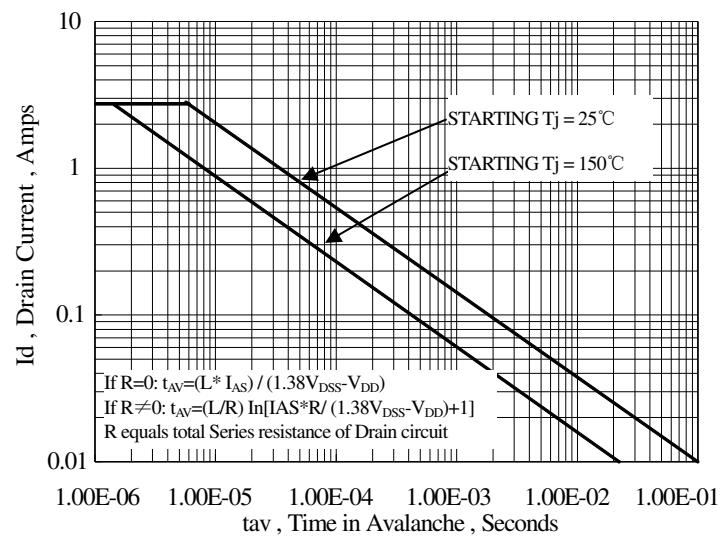


Figure 16 Unclamped Inductive Switching Capability

### Test Circuit and Waveform

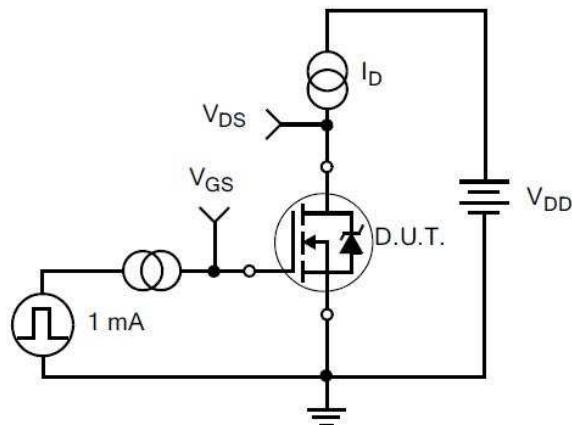


Figure 17. Gate Charge Test Circuit

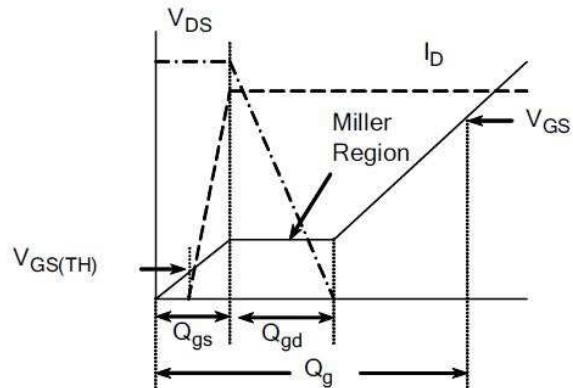


Figure 18. Gate Charge Waveform

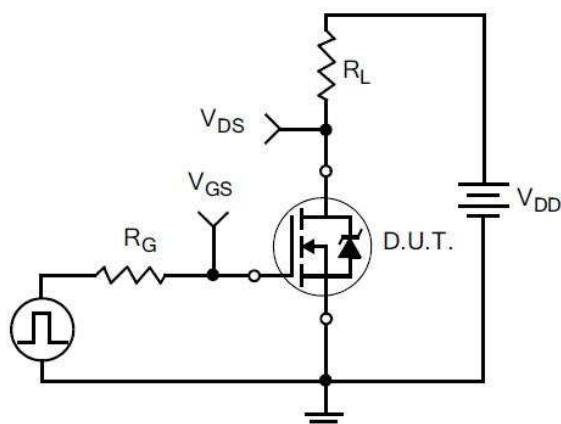


Figure 19. Resistive Switching Test Circuit

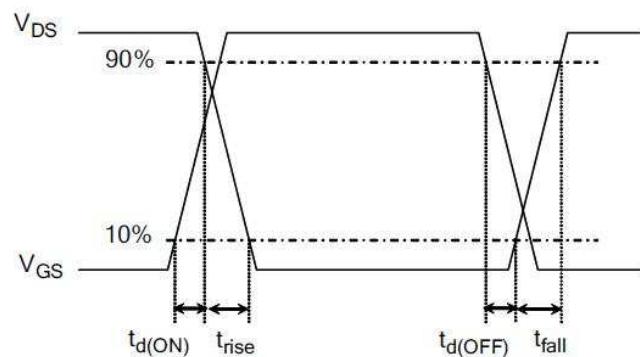


Figure 20. Resistive Switching Waveforms

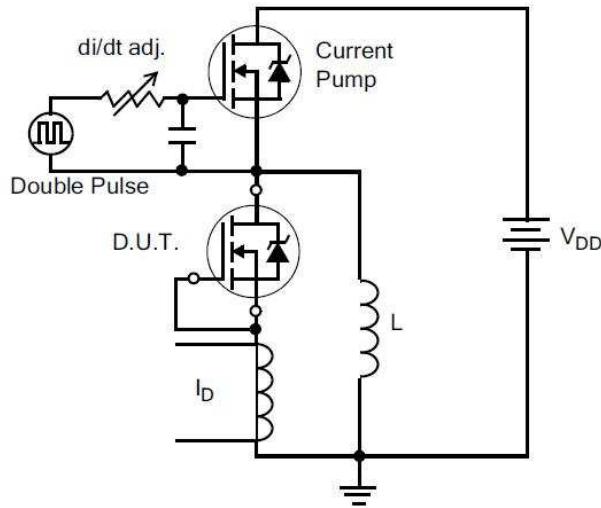


Figure 21. Diode Reverse Recovery Test Circuit

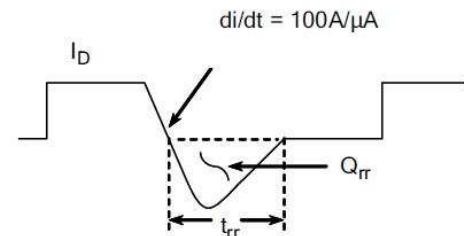


Figure 22. Diode Reverse Recovery Waveform

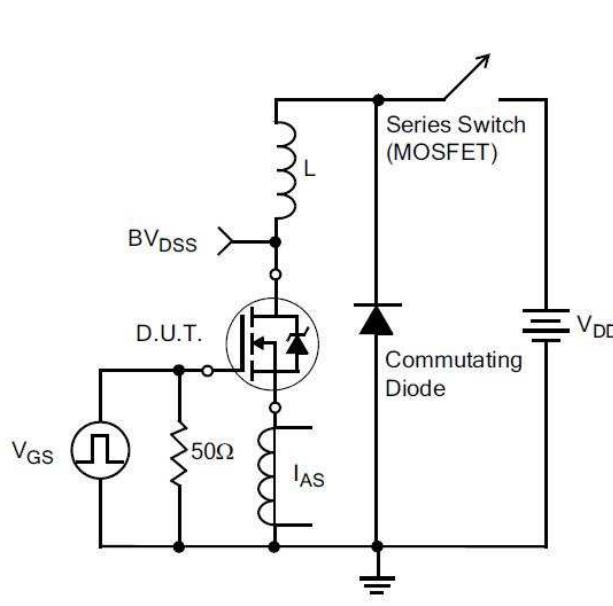


Figure 23. Unclamped Inductive Switching Test Circuit


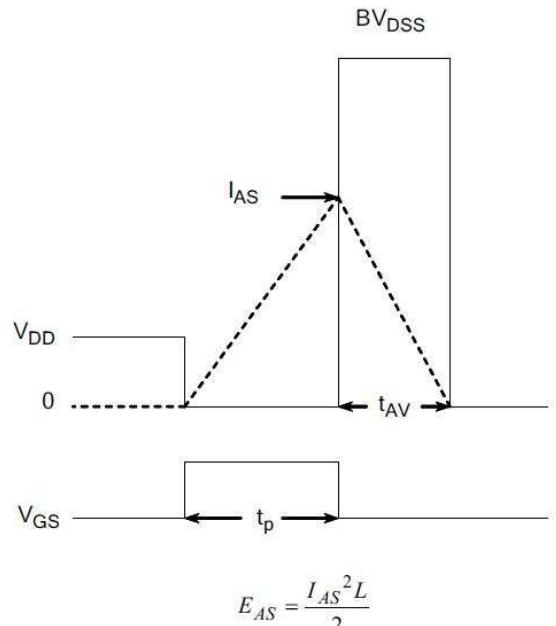


Figure 24. Unclamped Inductive Switching Waveforms

## Package Information:

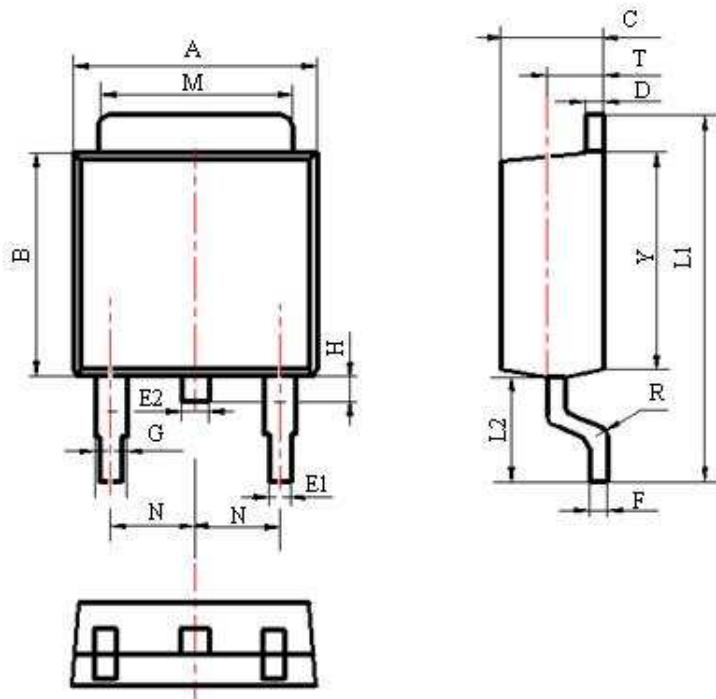

Items	Values(mm)	
	MIN	MAX
A	6.30	6.80
B	5.20	6.20
C	2.10	2.50
D	0.40	0.60
E1	0.60	0.80
E2	0.70	0.90
F	0.40	0.60
G	0.80	1.00
L1	9.70	10.20
L2	2.70	3.10
H	0.60	0.90
M	5.10	5.50
N	2.09	2.49
R	0.3	
T	1.40	1.60
Y	5.10	6.30

TO-252 Package

**The name and content of poisonous and harmful material in products**

Part's Name	Hazardous Substance					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
Limit	≤0.1%	≤0.1%	≤0.01%	≤0.1%	≤0.1%	≤0.1%
Lead Frame	○	○	○	○	○	○
Molding Compound	○	○	○	○	○	○
Chip	○	○	○	○	○	○
Wire Bonding	○	○	○	○	○	○
Solder	×	○	○	○	○	○
Note	<p>○: means the hazardous material is under the criterion of SJ/T11363-2006.</p> <p>×: means the hazardous material exceeds the criterion of SJ/T11363-2006.</p> <p>The plumbum element of solder exist in products presently, but within the allowed range of Eurogroup's RoHS.</p>					

**Warnings**

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. It is suggested to be used under 80 percent of the maximum ratings of the device.
2. When installing the heatsink, please pay attention to the torsional moment and the smoothness of the heatsink.
3. VDMOSFETs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
4. This publication is made by Huajing Microelectronics and subject to regular change without notice.

**WUXI CHINA RESOURCES HUAJING MICROELECTRONICS CO., LTD.**

Add: No.14 Liangxi RD. Wuxi, Jiangsu, China Mail:214061 <http://www.crhj.com.cn>  
Tel: +86 0510-85807228 Fax: +86- 0510-85800864

Marketing Part: Post: 214061 Tel: +86 0510-81805277/81805336  
Fax: +86 0510-85800360/85803016  
E-mail: [sales@hj.crmicro.com](mailto:sales@hj.crmicro.com)

Application and Service: Post: 214061 Tel / Fax: +86- 0510-81805243/81805110