




HESTORE.HU
elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Kondensator AUDIO AUDIO Capacitor

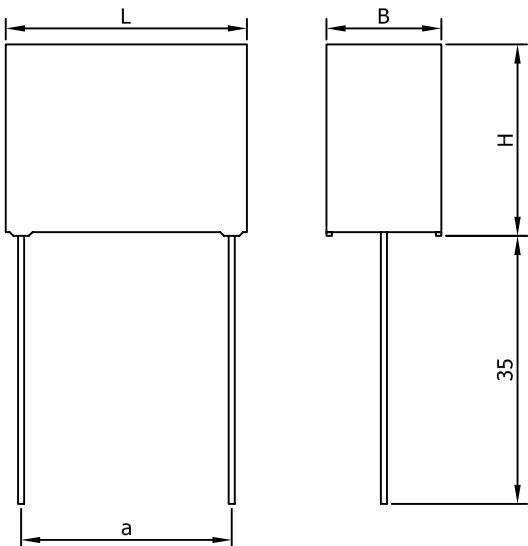

Pojemność znamionowa Rated capacitance μF	Tolerancja pojemności Capacitance tolerance %	Wymiary / Dimensions				
		$L \pm 0,5$	$H \pm 0,5$	$B \pm 0,5$	a	
0,01	$\pm 2\% / \pm 5\%$	13	10,5	4,5	10,0 \pm 0,5	
0,015			12,5	5,5		
0,022			13,5			
0,033			10,5	15 \pm 0,5		
0,047			12,5			
0,068		18	14,5			
0,1			17,0	8,5		
0,15			15,5	7,5	22,5 \pm 0,7	
0,22			16,5	8,5		
0,27	26,5	18,5	10,5	27,5 \pm 0,7		
0,33		20,5	11,5			
0,47		23,5	13,5			
0,68		24,5	15,0			
1,0		31,5	28,5	16,0	37,5 \pm 0,7	
1,5						
2,2						

Istnieje możliwość uzgodnienia innych pojemności oraz długości i rodzaju wyprowadzeń.
Other capacitance values and terminal lengths and types can be agreed upon request.

Dane Techniczne / Technical data:

Napięcie znamionowe 600VDC
Rated voltage

(Uwagi/Notes)

1. Wyrób spełnia wymagania Dyrektywy RoHS (2011/65/WE).


This product fulfils the requirements of the RoHS Directive (2011/65/EC).

Tg kąta stratności <0,0010 @ 1kHz
Dissipation factor

Kategoria klimatyczna 025/085/21/C
Climatic category

Wymiary zgodnie z tabelą
Dimensions acc. to table

PRZYKŁADOWY NADRUK
PRINTING LAYOUT EXAMPLE

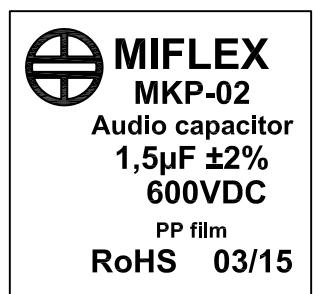

Description:

The MKP-02 capacitors, made from metallized polypropylene film, are designed for use in audio equipment. The design of the capacitors minimizes the parasitic impedance components: inductance and resistance, resulting in improved quality of sound in a given audio system. High quality and durability of the capacitors is assured by the use of carefully selected materials, production technology, as well as testing and measuring methods. These capacitors feature the use of a dielectric material with the property of self-healing during operation, impregnation of the capacitor element in oil, radial terminals made of tinned copper wire, box-shaped plastic housing, and self-extinguishing potting compound of flammability class V0.

The capacitors are furthermore subjected to a series of specific tests and measurements, including a unique test using pulses of increased current amplitude and frequency of 22kHz.

The MKP-02 capacitors can be used in d.c. and a.c. circuits within the temperature range of their climatic category. The d.c. voltage value or a.c. voltage amplitude should not exceed the specified rated voltage.



 **MIFLEX S.A.**

ZAKŁADY PODZESPOŁÓW RADIOSYNTETYCZNYCH
99-300 KUTNO, UL. GRUNWALDZKA 3 POLAND

Chief Engineering Specialist	+48 24 355 12 10
Design Department	+48 24 355 12 77
Production Engineering Department	+48 24 355 12 77
Fax	+48 24 355 11 88
E-mail	miflexsa@miflex.com.pl

Strona/
Page

1/1

Data aktualizacji/
Revision date

10.06.2015.