




**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

Technical Specifications

Models	LM40Mi	LM60Mi
Range	0.05~40m	0.05~60m
Accuracy	±(2.0mm+5x10 <sup>-5</sup> D)	
Continuous measurement	√	
Area & Volume measurement	√	
Perimeter measurement	√	
Pythagorean measurement	√	
MAX/MIN	√	
Unit switch	m, inch, ft	
Laser class	CLASS II	
Laser type	630~670nm, <1mW	
Auto laser cutting off	20s (Single Measurement)	
Auto power off	150s	
Measurement times in full charge	8000 times	
Storage temperature	-20°C~60°C	
Working temperature	0°C~40°C	
Storage humidity	20%~80%RH	
Characteristics		
Power supply	3.7V 370mAh Li-ion Battery	
Product size	86.5 x 36.5 x 19.5mm	
Product net weight	75g	
Standrad accessories	Mini Laser Distance Meter, Type-C Cable, User Manual, Hand Strap, Gift Box.	
Standard quantity per carton	20pcs	

Applications

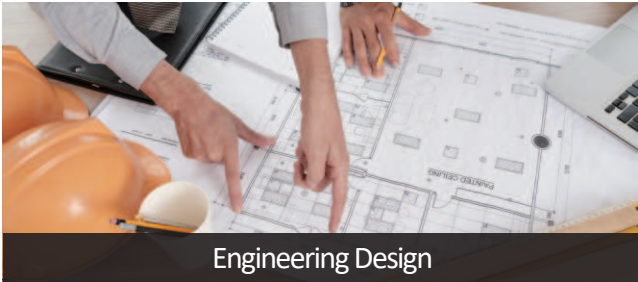

UNI-TREND  
TECHNOLOGY



[meters.uni-trend.com](https://meters.uni-trend.com)



LM40Mi/LM60Mi  
Mini Laser Distance Meter

Mini Laser Distance Meter series are with features of high accuracy, exquisite design and multiple functions, widely used in the outdoors decorations, engineering projects, and etc.



Multiple  
Measurement Modes



Continuous  
Measurement



Self Calibration



LCD Backlight



## Measurement range



## Compact Design & Mini Machine Body



## High-Accuracy Optic Sensor



## Metal body with comfortable texture



## Rechargeable Li-ion Battery & Type-C Charge Interface



## LCD Backlight Screen

More Clear Data



## Multiple measurement modes meet different requirements



## Simple Interactive Experience & One-Hand Operation



## Equip a hand strap to be portable

